




SIDE ELEVATION



FRONT ELEVATION

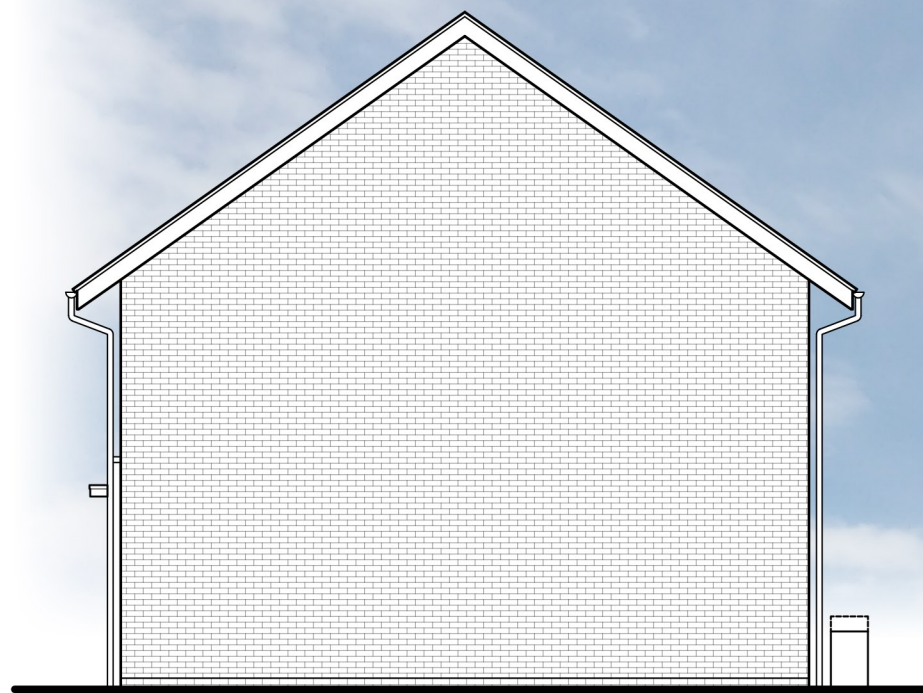

SIDE ELEVATION



REAR ELEVATION

EXTERNAL MATERIAL FINISHES SCHEDULE:

- 1 Facing brickwork to main walls. Colour red as approved.
- 2 Blue Engineering brick below Dpc
- 3 Roof Tiles. Quality replica slate.
- 4 Render window surrounds. Colour white as approved.
- 5 Grey Upvc windows
- 6 Upvc fascias and soffits. Colour to be confirmed.
- 7 Upvc Rainwater Goods. Colour to be confirmed.
- 8 Render. Parex Roughcast Render. Colour Brilliant White. Or similar approved.
- 9 Photovoltaic array (see specialist drawings for exact location).

A3

Original sheet size

Note: This Drawing is copyright. Its use or reproduction is subject to permission from Spring Design Consultancy Limited. All rights are reserved until invoices are paid in full. Contact SDC regarding terms & conditions. Check printed scale, responsibility is not accepted for reproduction of digital media or measuring from this document. Only figured dimensions to be used for construction. No responsibility will be taken for any design used for construction prior to receipt of relevant approvals. Report doubts/discrepancies to project Architect.

Rev	Date	By	CHK	Description

Client:	Project:	Drawing Title:							
Tai Tarian	Menai Avenue	HT 421 & 422 Elevations							
Drawing Status:	Date:	Drawn By:	Checked:	Director:	Scale:	Job No:	Drawing No:	Rev.	Unit 2 Chapel Barns Merthyr Mawr Bridgend CF32 0LS t: 01656 656267 e:mail@spring-consultancy.co.uk
PLANNING SUBMISSION	May 25	cc			1:100 @ A3	2754	421 (03)300	-	

spring
design