

CENBRIT

CI/SfB | (47) | Nf9 |
May 2018

Roof Slate Moorland

fibre cement slate with dressed edge and smooth surface





Moorland slate

Cembrit manufacturing plants have been developing and supplying roofing products, including slates for over 90 years.

Cembrit prides itself on manufacturing fibre cement slates which achieve the highest approvals from local, national and international agencies in the fields of product quality and sustainability.

Cembrit fibre cement slates are complemented by a range of fibre cement ridges, allowing compliance with the latest codes of practise for pitched roofing and condensation control. Cembrit slates and ridges can be found on all types of roofs across the British Isles.

Information on the complete Cembrit range appears on our website www.cembrit.co.uk

Environment

Environmental Management

Moorland slates are manufactured in a factory which complies with the requirements of BS EN ISO 14001: 2004. Find the current certificate on cembrit.co.uk.

Environmental Impact - European EPD EN15804

Following an LCA by the European Institute for Construction and Environment (IBU) an environmental product declaration (EPD) complying with ISO 14025 has been compiled by the IBU. To see the results in each of the impact categories find the certificate on cembrit.com/downloads.




Composition

Moorland slate has an appearance close to that of fine grained natural slate. Its attractive randomly dressed edges make it an ideal solution for situations where a natural looking roof slope appearance is desired. The dressed edge makes Moorland popular on lower pitched roofs. It is manufactured to the highest European standards and is lightweight, pre-holed, suitable for all types of projects, easy to handle and install, durable and an economic alternative to natural roofing materials. Moorland slates are manufactured using Portland cement together with a non-asbestos formulation of superior blended synthetic and cellulose fibres. Moorland slates are pigmented during production and are fully compressed. They are finished with a high quality, semi-matt acrylic coloured coating to the top face and edges and a tinted, high performance binder to the back face.

Appearance

Moorland slates are available in 600 x 300mm format, in blue/black, with a dressed edge.

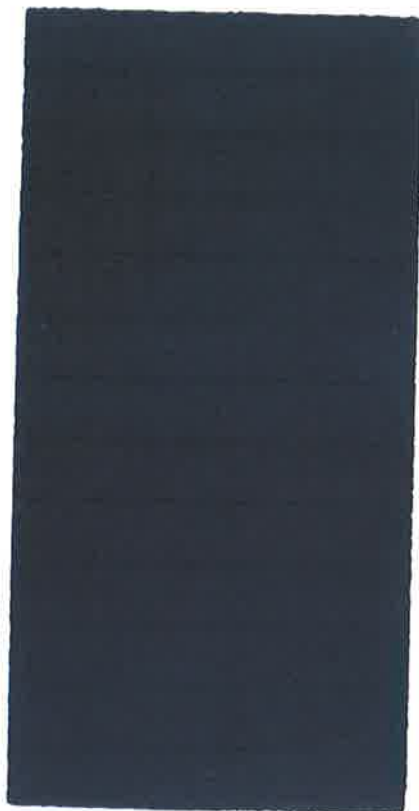

Blue Black

Quality assurance

Moorland slates are manufactured in accordance with a quality assurance system to BS EN ISO 9001 and to the requirements of EN492:2012+A1:2016 product specification for fibre cement slates and their fittings. Moorland slate has been awarded the BBA Certificate No. 03/4041. The slates have been tested by Birmingham City Council Laboratories and approved for use on Birmingham City Council projects. They are accepted for use by many other local authorities.

Performance

Compatibility

Moorland slates are compatible with most common building materials, except those vulnerable to alkaline attack. When materials such as aluminium are used as flashings or gutters they should be protected and maintained with bituminous paint if they will be subject to water run-off from the slates.

Tolerances

Moorland slates are made to the following dimensional tolerances in accordance with BS EN 492: 2012.

Length or width: 3.0mm Thickness: 4mm + 1.0mm, - 0.4mm

Mechanical characteristics

Average bending moment 45 Newton metres per metre.

Density

Moorland slates have an average density of 1850 kg/m³ when tested to BS EN 492: 2012 section 7.3.1.

Fire

When tested according to BS EN13501-1 of A2 - s1, d0, as specified in BS EN 492:2012 Section 5.5 Fire Safety.

Durability

Moorland slates show satisfactory performance for the various requirements of BS EN 492:2012 section 5.4.

Thermal

The coefficient of linear expansion of Moorland slates is approximately 8×10^{-6} mm/°C. This is equivalent to an expansion of 0.08mm/m for a 10°C temperature change. Thermal conductivity (k value) is 0.35W/m°C.

Effects of chemicals

During tests Moorland slates have been found to have a good resistance to chemical attack, however it should be noted that prolonged exposure will cause surface degradation. In areas where this may be excessive please consult Cembrit Ltd for further advice.

Biological

Moorland slates are vermin and rot proof. The acrylic coating of the slates will reduce the potential growth of moss and lichen.

General design considerations

Moorland slates laid to BS 5534 will meet the strength requirements for the imposed and uniformly distributed wind and snow loads etc. The site exposure rating and the pitch of roof rafters will determine the size, pattern, lap and fixings for the slates. For UK and Northern Ireland locations, the latest version of BS 5534 will indicate the expected degree of exposure. Wind driven rain ratings less than 56.5 l/m² per spell are described as 'moderate' (see table 1) and those above 56.5 l/m² per spell are described as 'severe' (see table 2). Detailed guidance on wind load calculations is given in the latest versions of BS 5534: and BS EN 1991-1-4:2005 and 1991-1-3:2003 to calculate the wind action (design and snow loads) on a roof it will be necessary for the designer to use two documents at the same time; the Eurocode standard BS EN 1991 Part 1-4, and the associated National Annex. The authors of the National Annex have advised that reference should also be made to PD 6688-1:2011. In locations where abnormal conditions may be anticipated such as elevated sites, coastal locations, areas of heavy snowfall etc., the recommendation for 'severe' should be followed. For buildings above 12m in height, the influence of increased windspeed can be determined using BS EN 1991-1-4.

Where the location or construction might make a lower rafter pitch acceptable, designers are asked to seek advice.

Table 1 Moderate exposure

less than 56.5 l/m² per spell

- In general, the recommendations below apply to rafter lengths of not more than 9m. The specifier should also take account of any abnormal local conditions that might apply.

Pitch deg	Slate Size mm x mm	Minimum headlap mm	Slates no/m	Batten gauge mm	Average weight kg/m
45°	600 x 300	90	13.07	255	19.61
40°	600 x 300	90	13.07	255	19.61
35°	600 x 300	90	13.07	255	19.61
30°	600 x 300	90	13.07	255	19.61
27.5°	600 x 300	100	13.33	250	20.00
25°	600 x 300	100	13.33	250	20.00
22.5°	600 x 300	100	13.33	250	20.00
20°	600 x 300	110	13.61	245	20.41

An allowance should be made for cutting and wastage for all exposures.

Table 2 Severe exposure


greater than or equal to 56.5 l/m² per spell

- In general, the recommendations below apply to rafter lengths of not more than 6m. The specifier should also take account of any abnormal local conditions that might apply.

Pitch deg	Slate Size mm x mm	Minimum headlap mm	Slates no/m	Batten gauge mm	Average weight kg/m
45°	600 x 300	90	13.07	255	19.61
40°	600 x 300	90	13.07	255	19.61
35°	600 x 300	90	13.07	255	19.61
30°	600 x 300	100	13.33	250	20.00
27.5°	600 x 300	100	13.33	250	20.00
25°	600 x 300	110	13.61	245	20.41
22.5°	600 x 300	110	13.61	245	20.41
20°	600 x 300	110	13.61	245	20.41

Table 3 Technical specification

Size mm	Holed mm	Weight per 1000 kg	No. per Pallet	Colour
600 x 300	90-110 lap	1500	1000	Blue Black

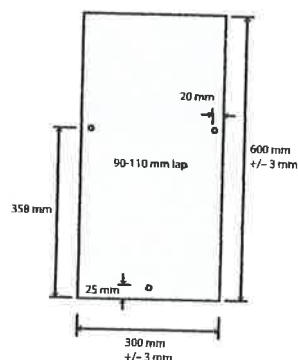

Sitework

Storage and handling

Moorland slates should not be allowed to become wet during storage as this may cause efflorescence staining as a result of water accumulating between the slates surfaces. If stored outside for short periods, the polythene hood should be removed and the slates open stacked and covered with a tarpaulin. The slates should be carefully stacked on their longer edges with timber bearers, battens or boards between layers. The lowest layer must be arranged on a firm level base.

Working

Moorland slates can be cut using the traditional method of scribing and breaking over a straight edge. Angle grinders are not recommended due to nuisance dust levels. Additional fixing holes should be drilled using a 4.5mm drill bit. Holes should not be less than 20mm from the edge of the slate. After cutting or drilling remove all dust from the slate to avoid possible staining.

Fixing

Moorland slates must be laid in accordance with the latest Code of Practice for Slating and Tiling, BS 5534: 2014, and the Code of Practice for Workmanship on Building Sites - Slating and Tiling, BS 8000: Part 6: 2013. The roof structure should be checked to ensure that it is to a true line and squareness tolerance, and set out to ensure that:

- the minimum cutting of slates is necessary.
- the long edges of the slates are parallel to the direction at which the water will run off the roof. In some instances this may result in raking cuts to all the eaves and the ridges.
- the horizontal lines of the courses are straight and true.
- the perpendicular lines of the slate are to a true alignment and allow for a small 'perp' gap between slates (3mm 1mm).

The last two items are best achieved using a chalked line.

The method of fixing is to centre nail each slate with two 2.65mm x 30mm long copper nails and secure the tail of the slate with a copper disc rivet of suitable quality (0.45 x Ø 20mm base with a 20 x Ø 2mm pin) correctly bent down-slope through 90°.


Slate and a half and double slate sizes should be drilled to accept three nails and two disc rivets as well as fixing holes for the slates in the course above. At all verges and abutments, alternate slate courses must start with slate and half width to maintain bond. Slate and a half widths must be used if the half slate is less than 150mm wide. At valleys and hips where slates need to be cut on the rake, wide slates must be used to maintain an adequate width at the head or tail. At mitred hips on low pitched roofs wide slates should be used beneath the hip capping.

Accessories


Cembrit dry fix fibre cement ridges are available in various profiles and pitch angles. Manufactured to BS EN 492:2012, in a factory operating ISO 9001 and 14001 quality and environmental management systems, their incorporation in your design will allow you to comply with current best practise.

For fibre cement ridges use 75mm long stainless steel Torx TX25 raised countersunk head.


Fibre-cement Ridge Fixing Locations

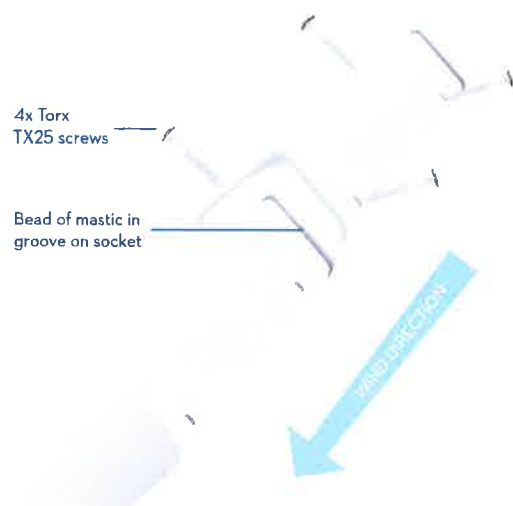

Continuously ventilated/Universal/plain angle ridge

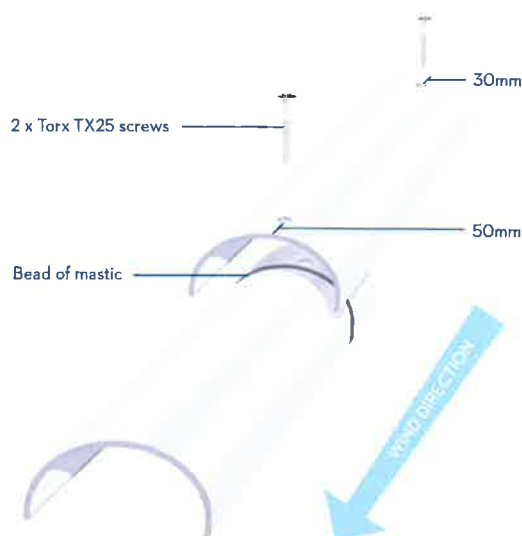

Half round/conic ridges

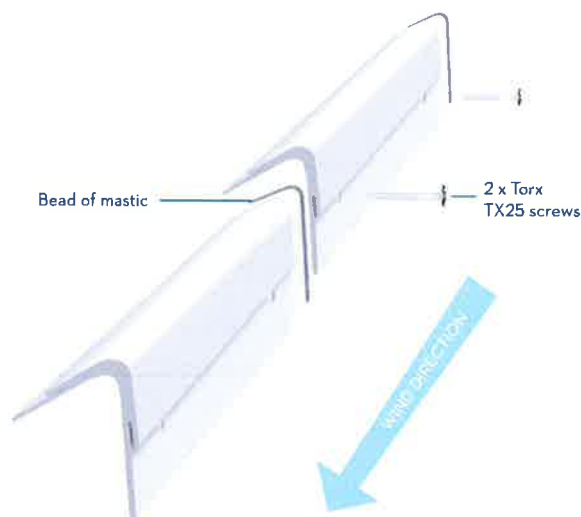

Continuously ventilated monopitch ridge



Fibre cement ridge/hip covering product range - Dimensions

Profile	Joint	Roof pitch	Ridge angle	Cover length (mm)	Wing (mm)	Cover width (diameter)	Block end depth (mm)
Universal							
	Spigot	25° to 40°	106°	600	175	252	n/a
End cap	Socket	25° to 40°	106°	600	175	252	200
End cap	Spigot	25° to 40°	106°	600	175	252	200
Plain angle							
	Spigot + Socket	22.5°	135°	525	120	200	n/a
End cap	Socket	22.5°	135°	500	120	200	190
	Spigot + Socket	30°	120°	525	120	200	n/a
End cap	Socket	30°	120°	500	120	200	195
	Spigot + Socket	37.5°	105°	525	120	200	n/a
End cap	Socket	37.5°	105°	500	120	200	190
	Spigot + Socket	45°	90°	525	120	200	n/a
End cap	Socket	45°	90°	500	120	200	200
	Spigot + Socket	52.5°	75°	525	120	200	n/a
End cap	Socket	52.5°	75°	500	120	200	75
Large half round conic							
		Pitches up to 30°	120°	c.400	n/a	(230) 206	n/a
Small end cap		Pitches up to 30°	120°		n/a	190	211
Large end cap		Pitches up to 30°	120°		n/a	220	228
Baby conic							
				c.300	n/a	(120) 112	n/a

Continous Ventilated Ridge

Roof pitch degree	Ridge angle	Weight per unit	Length	Crate quantity	Air gap per unit
45	90°	3.24Kg	525mm	145pcs	5880mm ²
37.5	105°	3.24Kg	525mm	130pcs	5880mm ²
30	120°	3.24Kg	525mm	140pcs	5880mm ²
22.5	135°	3.24Kg	525mm	140pcs	5880mm ²
52.5°	75°	3.24Kg	525mm	300pcs	5880mm ²

Continous Ventilated Monopitch Ridge

Roof pitch degree	Ridge angle	Weight per unit	Length	Crate quantity	Air gap per unit
20-40	50°	4Kg	525mm	84pcs	5880mm ²

