



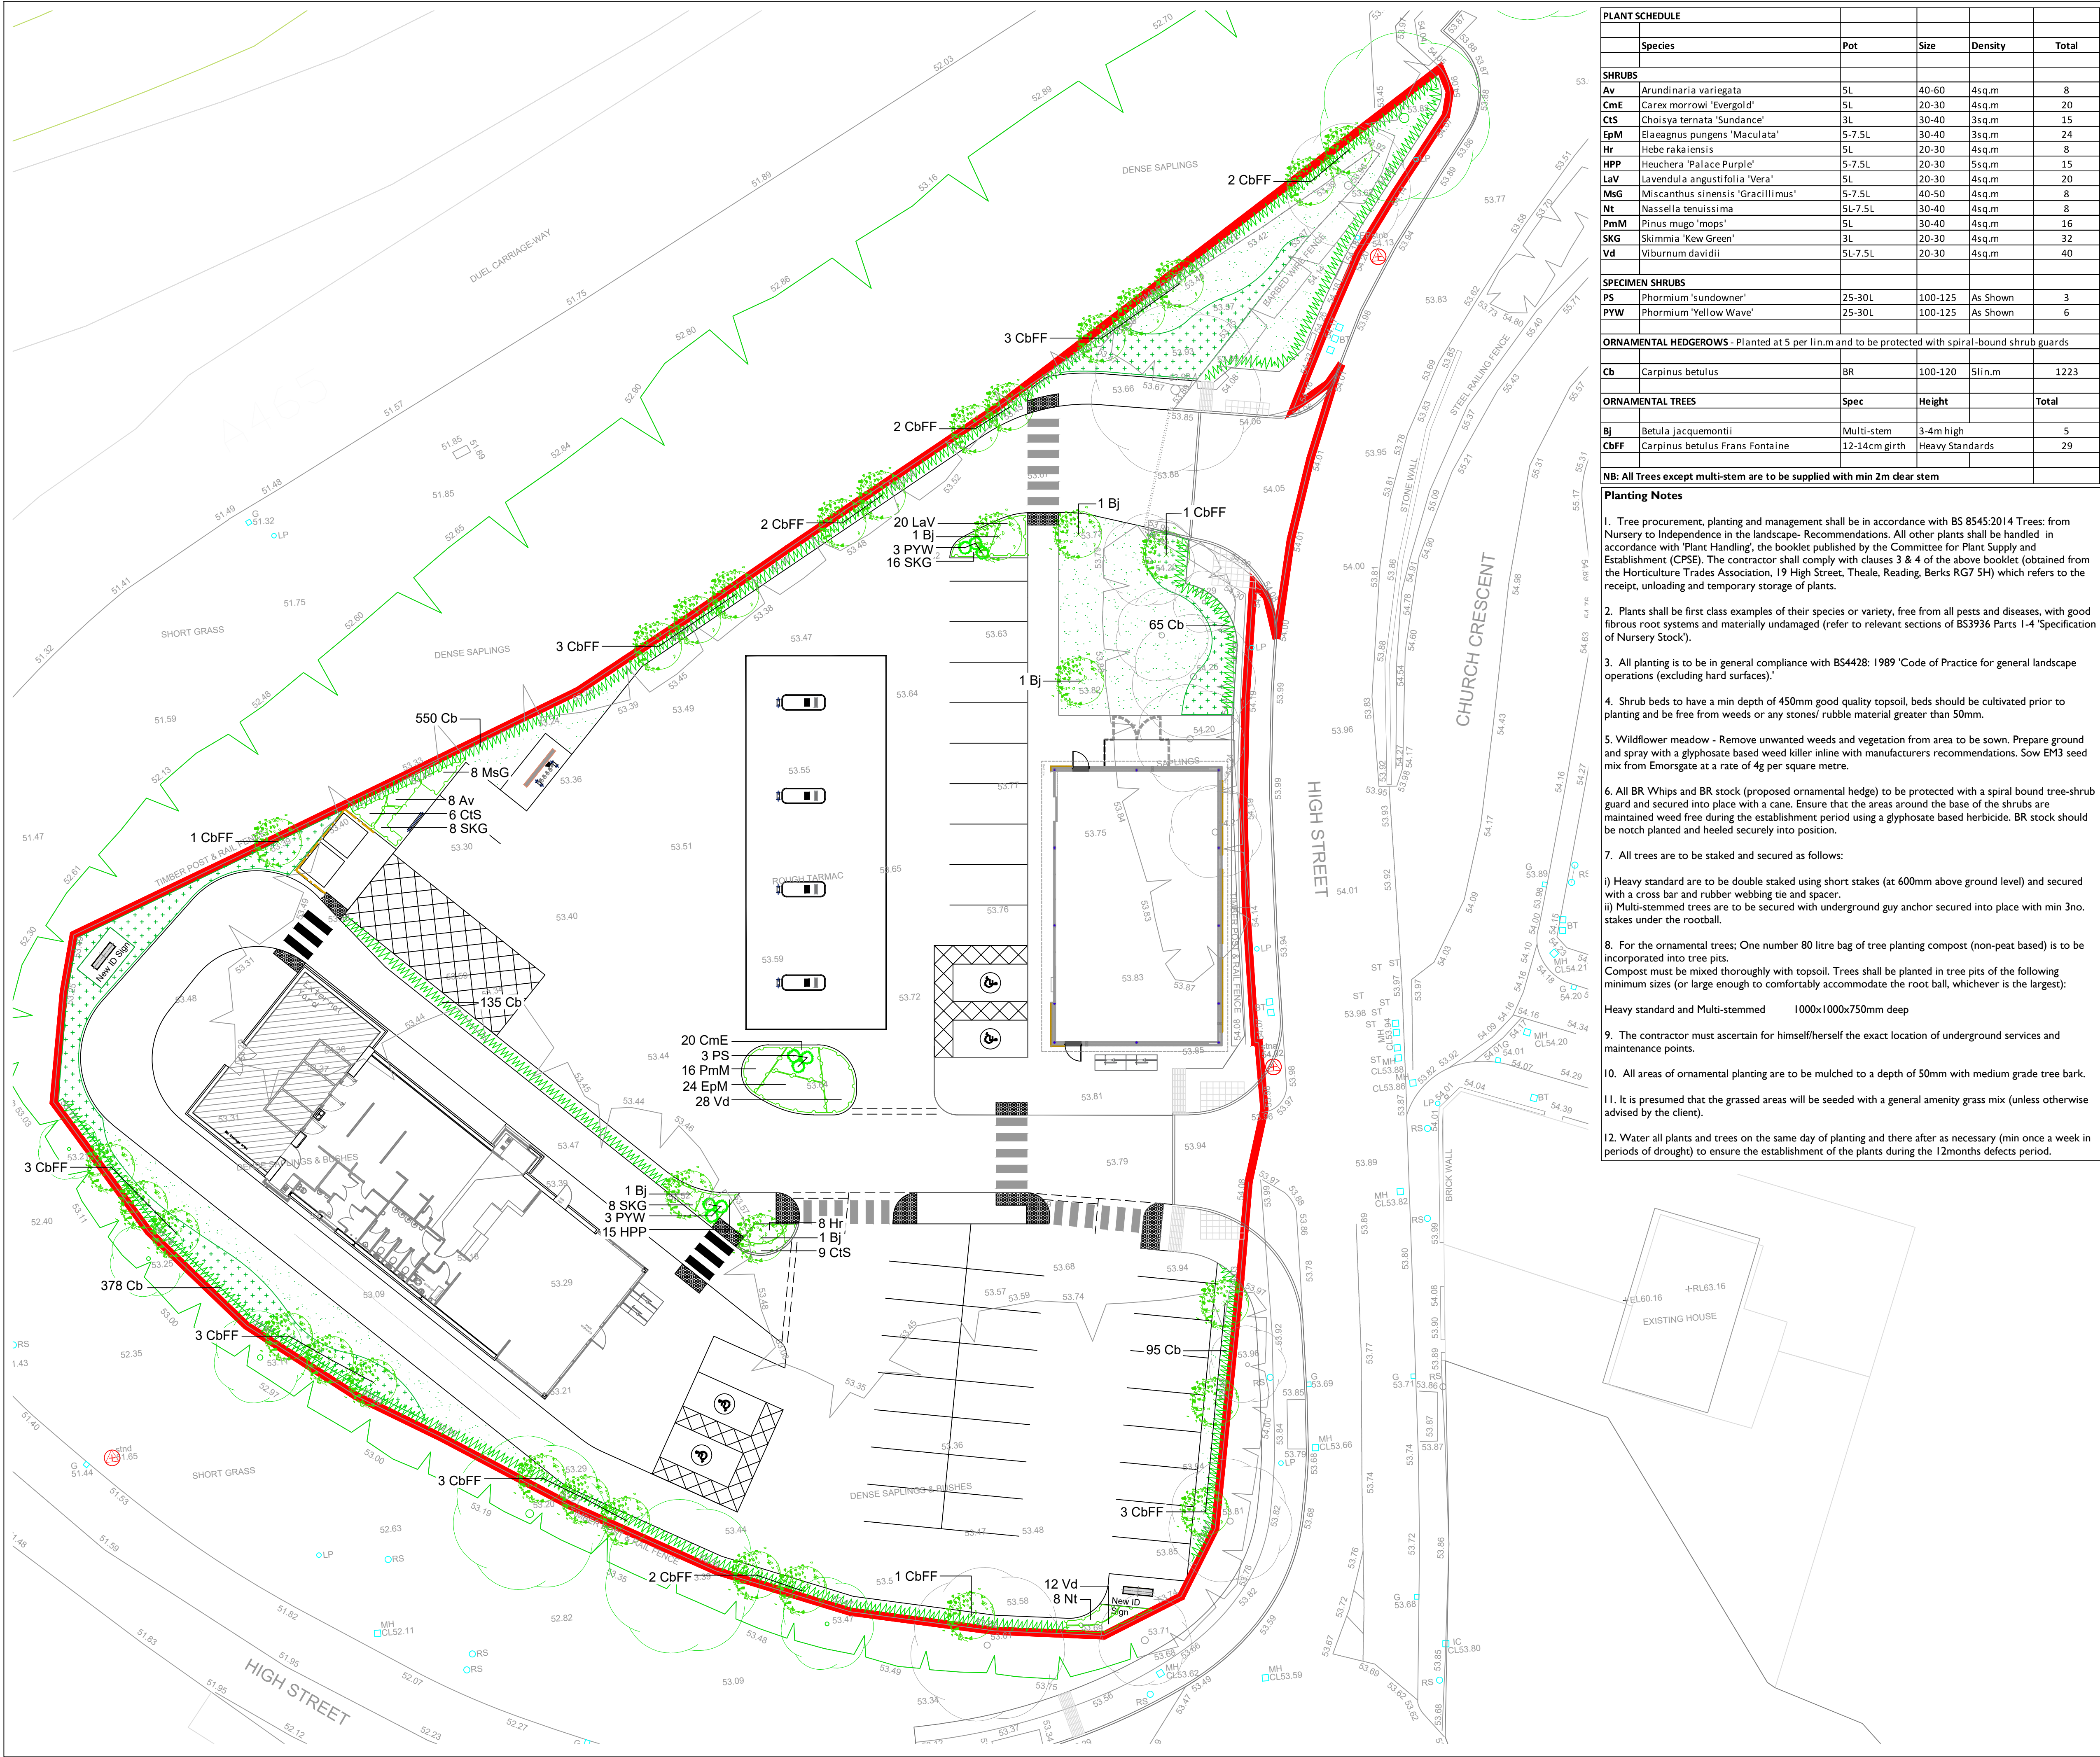


PLANT SCHEDULE					
	Species	Pot	Size	Density	Total
SHRUBS					
Av	Arundinaria variegata	5L	40-60	4sq.m	8
CmE	Carex morrowi 'Evergold'	5L	20-30	4sq.m	20
CIS	Choisya ternata 'Sundance'	3L	30-40	3sq.m	15
EpM	Elaeagnus pungens 'Maculata'	5-7.5L	30-40	3sq.m	24
Hr	Hebe rakaiensis	5L	20-30	4sq.m	8
HPP	Heuchera 'Palace Purple'	5-7.5L	20-30	5sq.m	15
LaV	Lavendula angustifolia 'Vera'	5L	20-30	4sq.m	20
MsG	Miscanthus sinensis 'Gracillimus'	5-7.5L	40-50	4sq.m	8
Nt	Nassella tenuissima	5L7.5L	30-40	4sq.m	8
PmM	Pinus mugo 'mops'	5L	30-40	4sq.m	16
SKG	Skimmia 'Kew Green'	3L	20-30	4sq.m	32
Vd	Viburnum davidii	5L7.5L	20-30	4sq.m	40
SPECIMEN SHRUBS					
PS	Phoridium 'sundowner'	25-30L	100-125	As Shown	3
PYW	Phoridium 'Yellow Wave'	25-30L	100-125	As Shown	6
ORNAMENTAL HEDGEROWS - Planted at 5 per lin.m and to be protected with spiral-bound shrub guards					
Cb	Carpinus betulus	BR	100-120	5lin.m	1223
ORNAMENTAL TREES					
	Spec		Height		Total
Bj	Betula jacquemontii	Multi-stem	3-4m high		5
CbFF	Carpinus betulus Frans Fontaine	12-14cm girth	Heavy Standards		29
NB: All Trees except multi-stem are to be supplied with min 2m clear stem					

- Planting Notes**
- Tree procurement, planting and management shall be in accordance with BS 8545:2014 Trees: from Nursery to Independence in the landscape- Recommendations. All other plants shall be handled in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants.
 - Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').
 - All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces).'
 - Shrub beds to have a min depth of 450mm good quality topsoil, beds should be cultivated prior to planting and be free from weeds or any stones/ rubble material greater than 50mm.
 - Wildflower meadow - Remove unwanted weeds and vegetation from area to be sown. Prepare ground and spray with a glyphosate based weed killer inline with manufacturers recommendations. Sow EM3 seed mix from Emorsgate at a rate of 4g per square metre.
 - All BR Whips and BR stock (proposed ornamental hedge) to be protected with a spiral bound tree-shrub guard and secured into place with a cane. Ensure that the areas around the base of the shrubs are maintained weed free during the establishment period using a glyphosate based herbicide. BR stock should be notch planted and heeled securely into position.
 - All trees are to be staked and secured as follows:
 - Heavy standard are to be double staked using short stakes (at 600mm above ground level) and secured with a cross bar and rubber webbing tie and spacer.
 - Multi-stemmed trees are to be secured with underground guy anchor secured into place with min 3no. stakes under the rootball.
 - For the ornamental trees; One number 80 litre bag of tree planting compost (non-peat based) is to be incorporated into tree pits. Compost must be mixed thoroughly with topsoil. Trees shall be planted in tree pits of the following minimum sizes (or large enough to comfortably accommodate the root ball, whichever is the largest):
Heavy standard and Multi-stemmed 1000x1000x750mm deep
 - The contractor must ascertain for himself/herself the exact location of underground services and maintenance points.
 - All areas of ornamental planting are to be mulched to a depth of 50mm with medium grade tree bark.
 - It is presumed that the grassed areas will be seeded with a general amenity grass mix (unless otherwise advised by the client).
 - Water all plants and trees on the same day of planting and there after as necessary (min once a week in periods of drought) to ensure the establishment of the plants during the 12months defects period.

Softworks

- Existing trees to be retained
- Existing trees removed
- Proposed trees planted as heavy standard 12-14cm girth with 2m clear stem. Multi-stem trees to be planted at 3-4m height.
- Proposed ornamental hedge planted BR at 5 per lin.m
- Proposed shrub beds planted 3-7.5L containers 3-5 per sq.m
- Proposed feature plants to be planted as 20-30L specimens
- Proposed grass areas to be seeded unless otherwise stated by client
- Proposed wildflower meadow mix EM3 – special general purpose meadow mixture supplied by Emorsgate. www.wildseed.co.uk

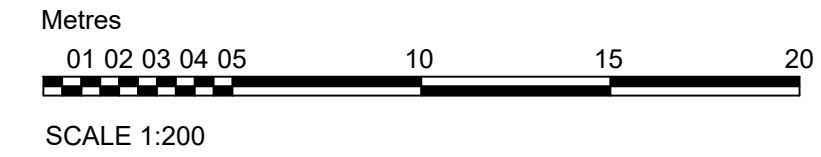

Rev A Highways detail added to site frontage TC 27.08.19



DEP LANDSCAPE ARCHITECTURE LTD

2 COMMERCIAL STREET
MANCHESTER, M15 4RQ
T: 0161 2419878
E: info@dep.co.uk
W: www.dep.co.uk

Client

Euro Garages Ltd.

Project

Blaengwrach, Neath

Description

Landscape Layout

Status

Planning

Scale

1:200@A1

Drawn

AJ (CL)

Job number

3997

Drawing number

01

Date

25/06/18

Revision

A

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement: Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.