



COLOURS

AG Paving Blocks

Plaza

premium water-etched, lightly textured, granite aggregate paving + flagstones

DEPTHS



50 60
80
Millimetres

FINISH

Tex

Textured




600 x
400mm



400 x
400mm



600 x
200mm



400 x
200mm



300 x
150mm



200 x
200mm



200 x
150mm



200 x
100mm



150 x
150mm




255 x
170mm




170 x
170mm

Plaza
colours


COLOURS




SALT



PEPPER



BIRKES



LAKRIDS




KARDEMOM




SALVIE



SAFRAN




KANEL



PAPRIKA



SESAM



SINNEP



Frost
Resistant



Pedestrian
Use



Light
Traffic



Heavy
Traffic
80mm only



Abrasion
Resistant



Available in
permeable
(Xflo)



Machine
Lay available



T 028 8778 4208 | GB Sales T 0121 747 0202 | E specifications@ag.uk.com

AG.UK.COM

Plaza

premium water-etched, lightly textured,
granite aggregate paving + flagstones


DEPTHS



50 60
80
Millimetres

FINISH

Tex
Textured

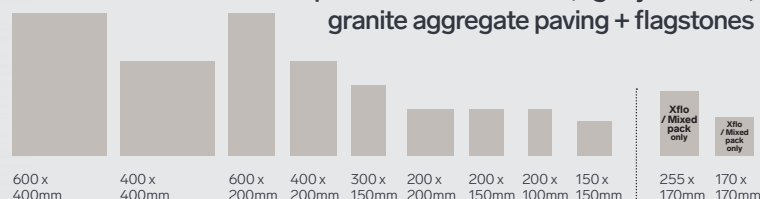

Xflo / Mixed pack only

Xflo / Mixed pack only

STANDARDS + PERFORMANCE


Product Type	Premium water-etched, lightly textured, granite aggregate paving + flagstones
Manufactured to Surface Layer	BS EN 1338 (paving blocks) / BS EN 1339:2003 (flagstones) Durable and hard wearing with a minimum surface layer of 5mm. Minimum cement content 380kg/m ³
Granite Content Efflorescence	Not less than 90% natural granite and quartz aggregate in surface layer State-of-the-art factory controlled vapour curing significantly reduces this naturally occurring chemical reaction
Bending Strength (Flagstones)	>5Mpa Class 3. This pressure applies to all flagstones sizes and depths. For specific force performance on a given size or depth please contact our Technical Specification Department
Tensile Splitting Strength (Paving Blocks)	>3.6Mpa. This pressure applies to all paving blocks sizes and depths For specific force performance on a given size or depth please contact our Technical Specification Department
Slip / Skid Resistance	(USRV) >75 low potential for slip. Specific slip / skid resistance test results are available on request from our Technical Specification Department
Frost Resistance	Class 3 in accordance with BS EN 1339:2003 Table 4.2
Abrasion Resistance	Class 4 in accordance with BS EN 1339:2003 Table 6
Installed to NBS Plus	BS 7533-4:2006 Q24 110

SUSTAINABILITY


Energy Use	100% renewable
Water Used	90% recycled water
Recyclable	100% of this product can be recycled
Manufacturing	Produced in the UK using responsibly sourced materials
Non-Primary Materials	52 – 60% (surface layer)
Waste Wood + Plastic	100% recycled
Carbon Footprint	We have a new state-of-the-art washing plant which enables AG to produce paving from 100% recycled waste aggregate. Please contact our Technical Specification Department if you are interested in specifying such a product
BREEAM	50 - 60mm: A Rating – according to the Green Guide to Specification 4th edition 2009. A+ Rating can be achieved when used in conjunction with a prepared recycled sub-base 80mm: B Rating – according to the Green Guide to Specification 4th edition 2009. A Rating can be achieved when used in conjunction with a prepared recycled sub-base

EDGES

Plaza Supplied with medium radius rounded chamfer. 3s mixed packs supplied with a small radius rounded chamfer. Xflo supplied with a medium to large radius round chamfer.



Medium Radius Round Chamfer



Medium to Large Radius Round Chamfer (Xflo 200x100x80mm only)

SPACER NIBS

50mm: 2mm spacers on each paver leaving a 3mm minimum joint when laid.

60mm: 1.5mm spacers on each paver leaving a 2mm minimum joint when laid.

80mm: 2mm spacers on each paver leaving a 3mm minimum joint when laid.

Xflo®: 3.25mm x 2 spacers on each paver leaving a 7mm minimum joint when laid.

FINISHES

Our unique water etched production process ensures that there is over 90% of carefully blended, colourfast natural granite aggregates in the surface of each block.



Frost Resistant



Pedestrian Use



Light Traffic



Heavy Traffic
80mm only



Abrasion Resistant



Available in permeable (Xflo)



Machine Lay available

MANUFACTURING

Plaza is manufactured from specially selected fine granite aggregates. Its premium stone washed appearance is obtained using computer controlled washing machinery which leaves a uniquely natural finish (coarse texture). Unique aggregate storage methods avoiding aggregate contamination. PLANT OF MANUFACTURE (POM): Made at our Toome production plant.

CERTIFICATION

ISO 9001
ISO 14001
ISO 45001
CE Marking

Quality Management.
Environmental Management.
Occupational Health and Safety Management.
Download our Declaration of Performance (DOP) data at:
www.ag.uk.com/cemarking



DEPTHS




50 | 60
80
Millimetres

FINISH



Textured

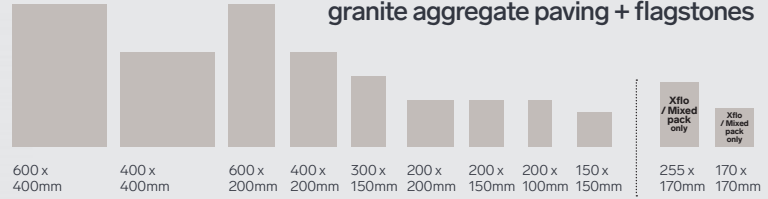

premium water-etched, lightly textured,
granite aggregate paving + flagstones

AG RECOMMENDATIONS

Close Jointing

AG recommends a close joint of between 2mm - 5mm as per BS 7533 to cater for product alignment (butt jointing should be avoided).

Jointing Sand

AG recommends that silver and slate coloured products are jointed with AG's Granite Sand.

Colour blending

AG recommends that products are blended from 3 packs from alternate sides using full vertical sections.

Please contact our Technical Specification Department for further details.

ADVICE + GUIDANCE

For advice and guidance on ordering, installation, good site practice, etc. visit our website:
professional.ag.uk.com/advice+guidance

For maintenance guidance and health and safety advice visit our website:
professional.ag.uk.com/maintenance



Frost Resistant



Pedestrian Use



Light Traffic



Heavy Traffic
80mm only



Abrasion Resistant



Available in permeable (Xflo)



Machine Lay available

SPECIFICATION REFERENCE: NBS PLUS: Q24 110 SLAB/BRICK/SETT/COBBLE PAVINGS BS EN: 1339:2003

LARGE FORMAT

Large Format Plaza is available - see the Large Format Plaza data sheet for more information.



PLANK PAVING

Plaza Lineal mixed size plank paving are available - see the Plaza Lineal data sheet for more information.



SETTS

Plaza Setts are available - see the Setts data sheet for more information.



Plaza

premium water-etched, lightly textured,
granite aggregate paving + flagstones

DEPTHS




50 60
80
Millimetres

FINISH



Textured

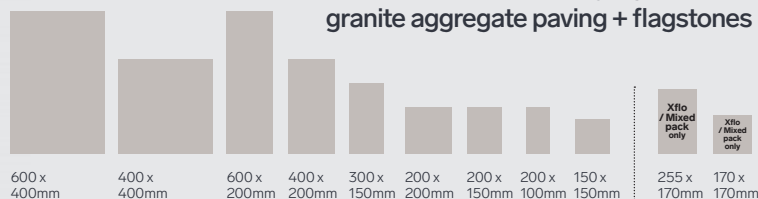

Xflo / Mixed pack only

Xflo / Mixed pack only

255 x 170mm

170 x 170mm

STOCK INFORMATION

Standard product depth	Size (mm)	In Stock	Available Colours	m² per pack	Units per m²	Units per pack	Unit weight (kg)	Weight per pack (t)	Packs per 8 wheeler	Packs per unit lorry
50mm	600 x 400	Yes	Salt / Pepper	15.36	4.16	64	28.8	1.843	9	13 / 15
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
	400 x 400	Yes	Salt / Pepper	15.36	6.25	96	19.2	1.843	9	13 / 15
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
60mm	300 x 150	Yes	Salt / Pepper	12.6	22.2	280	6.25	1.75	9	13 / 16
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
	200 x 150	Yes	Salt / Pepper	12.96	33.3	432	4.1	1.75	9	13 / 16
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
	200 x 100	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	12.48	50	624	2.8	1.75	9	13 / 16
	150 x 150	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	12.96	44.4	576	3.1	1.75	9	13 / 16
80mm	600 x 400	Yes	Salt / Pepper	9.6	4.16	40	46.1	1.844	9	13 / 15
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
	600 x 200	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9.6	8.33	80	21	1.8	9	13 / 15
	*400 x 400	Yes	Salt / Pepper	9.6	6.25	60	30.7	1.842	9	13 / 15
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
	*400 x 200	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9.6	12.5	120	15	1.76	9	13 / 16
	200 x 200	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9.6	25	240	7.5	1.76	9	13 / 16
	200 x 150	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9	33.3	300	5.5	1.65	9	13 / 17
	200 x 100	Yes	Salt / Pepper	9.72	54	486	3.7	1.7	9	13 / 16
		MTO	Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes							
	150 x 150	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9	44.4	400	4.1	1.65	9	13 / 17
Xflo Plaza Machine Lay available in 80mm										
60mm	200 x 100	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	12.48	50	624	2.6	1.70	9	14 / 16
80mm	mixed 2 size pack 255 x 170 170 x 170	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9.75	30	270 (135 of each size)	8	1.75	9	13 / 16
	5.3									
	200 x 100	MTO	Salt / Pepper / Kardemom / Salvie / Kanel / Safran / Paprika / Lakrids / Sesam / Sinnep / Birkes	9.6	50	528	3.55	1.8	9	13 / 15

MTO: Made To Order (minimum order quantities: 250m² per colour / size. Orders below these quantities should be priced on application).
Information for a specific colour / depth is available on request from our Technical Specification Department.

* The flagstone sizes 400x400 and 400x200 in the 80mm depth are the only units suitable for use with Heavy Traffic (bound / unbound).



Frost
Resistant



Pedestrian
Use



Light
Traffic



Heavy
Traffic
80mm only



Abrasion
Resistant



Available in
permeable
(Xflo)



Machine
Lay available