
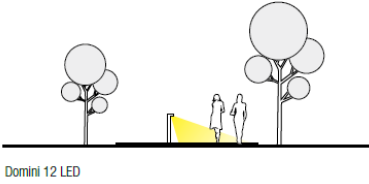


DOMINI 12 LED

LB6047.551

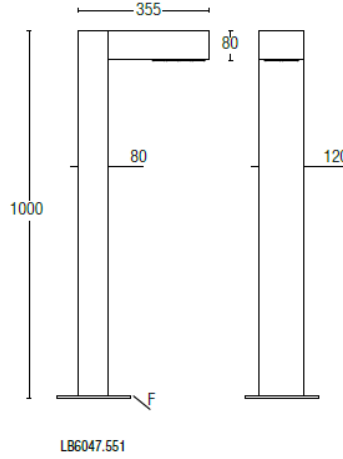

General Highlight


- Ideal solution for landscape areas
- Structured with LED light source
- Operating Temperature -40°C / +55°C
- Exceptional thermal characteristics
- In compliance with EN 60598, EN 62722

Electrical Properties

- Drive current: 350mA
- Optimized PCB Design
- Energy Class: A
- Input Voltage: 220V - 240V at 50Hz / 60Hz
- Control type: On/Off
- Power Factor > 0.90

Optical Properties

- Equipped with LED light source
- No glare with intended use
- High power undomed LED Chips
- Quarter bin Led Chips
- MacAdam Ellipse 3
- Photobiological safety: Risk group 1
- Lumen output (absolute photometry): 1300lm – 1350lm
- Color temperature: 3000K, 4000K, 2700K (optional)
- CRI > 70 (4000K), CRI > 80 (3000K)
- ULOR: 0

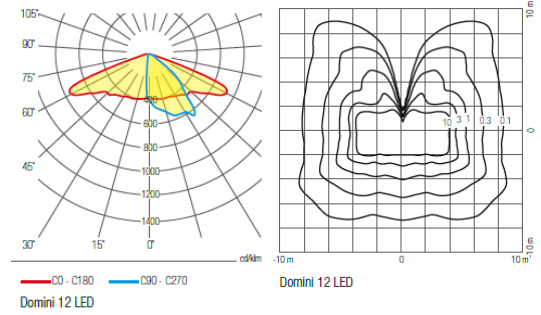

Landscape Areas



Walkways

Body Housing & Finish

- Corrosion resistant aluminum housing
- Electrostatic powder coating
- HM1 to HM6 standard colors with optional RAL codes
- Ingress protection: IP65
- Impact protection: IK07

Extras

- Higher CRI LED chips
- Marine grade body

Finish Options

- HM1 - Special Black
- HM2 - Special Silver Grey
- HM3 - Special Dark Grey
- HM4 - Special Light Grey
- HM5 - Special White
- HM6 – Special Brown
- Optional RAL Codes

DOMINI 12 LED

CODE	DESCRIPTION	CCT	POWER	SYSTEM LUMEN OUTPUT	ANCHORAGE
LB6047.551	Domini 12 Led	3000K	14W	1300-1350lm	90AJ001