

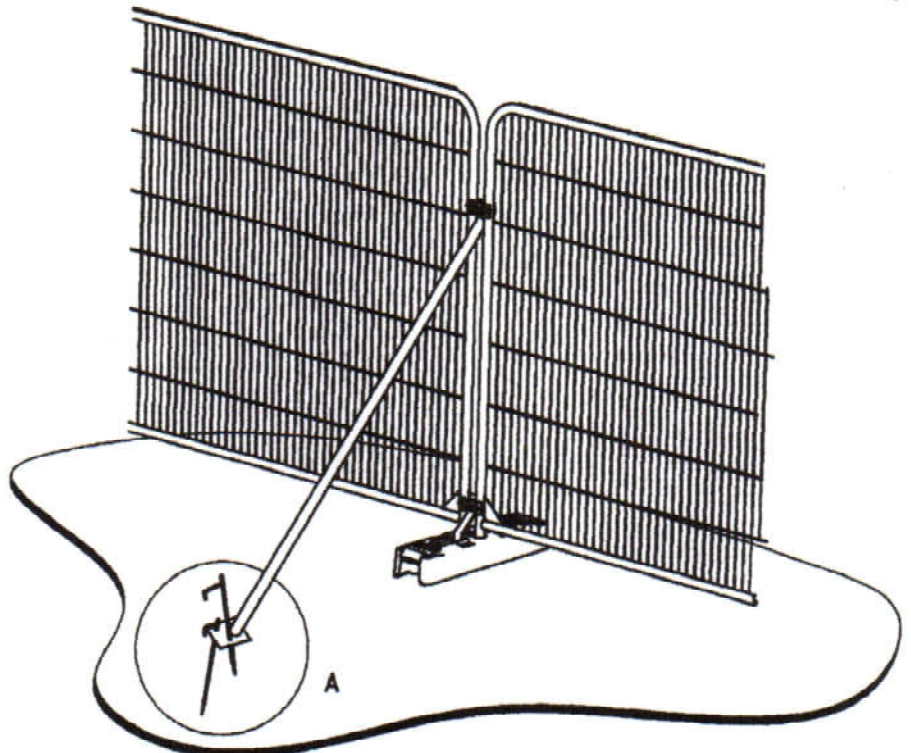
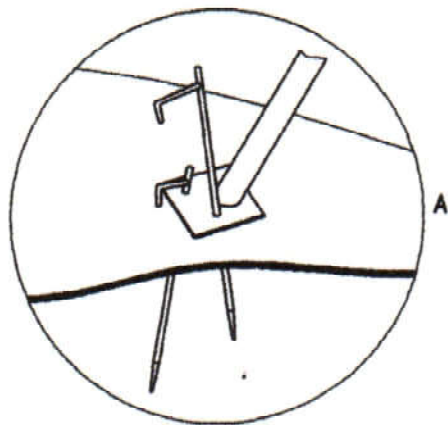


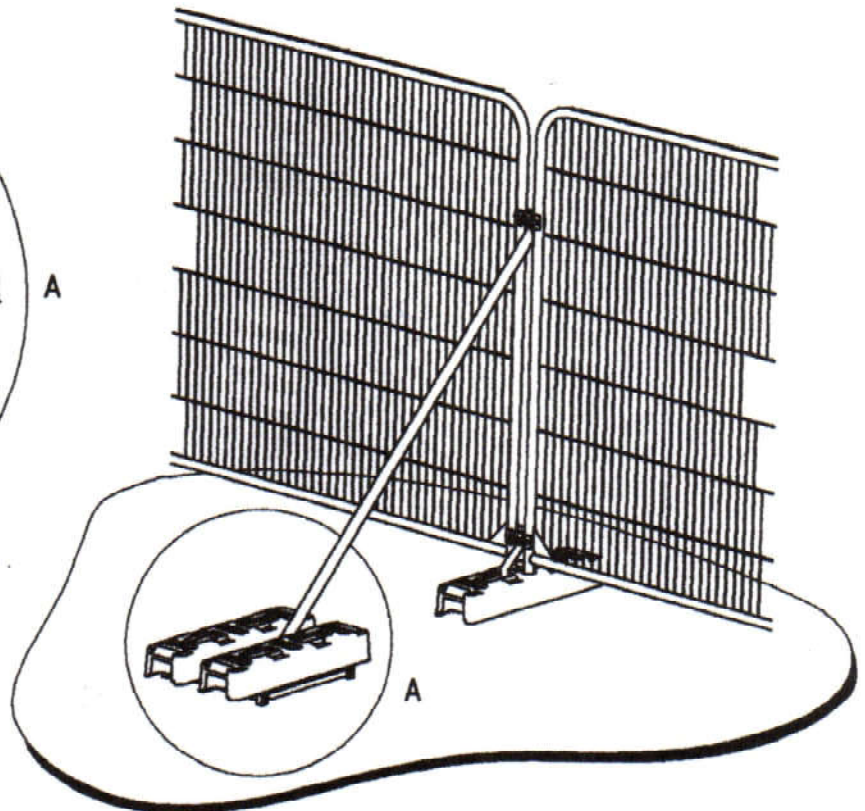

) Stabilizer strut with base plate secured with ground pins

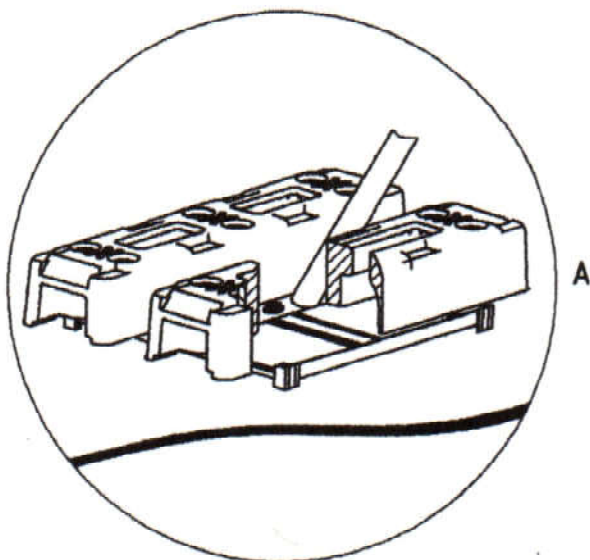

) Stabilizer strut mounted on block tray

### 6.2.3 Ground protection during demolition and construction

**6.2.3.1** Where construction working space or temporary construction access is justified within the RPA, this should be facilitated by a set-back in the alignment of the tree protection barrier. In such areas, suitable existing hard surfacing that is not proposed for re-use as part of the finished design should be retained to act as temporary ground protection during construction, rather than being removed during demolition. The suitability of such surfacing for this purpose should be evaluated by the project arboriculturist and an engineer as appropriate.