
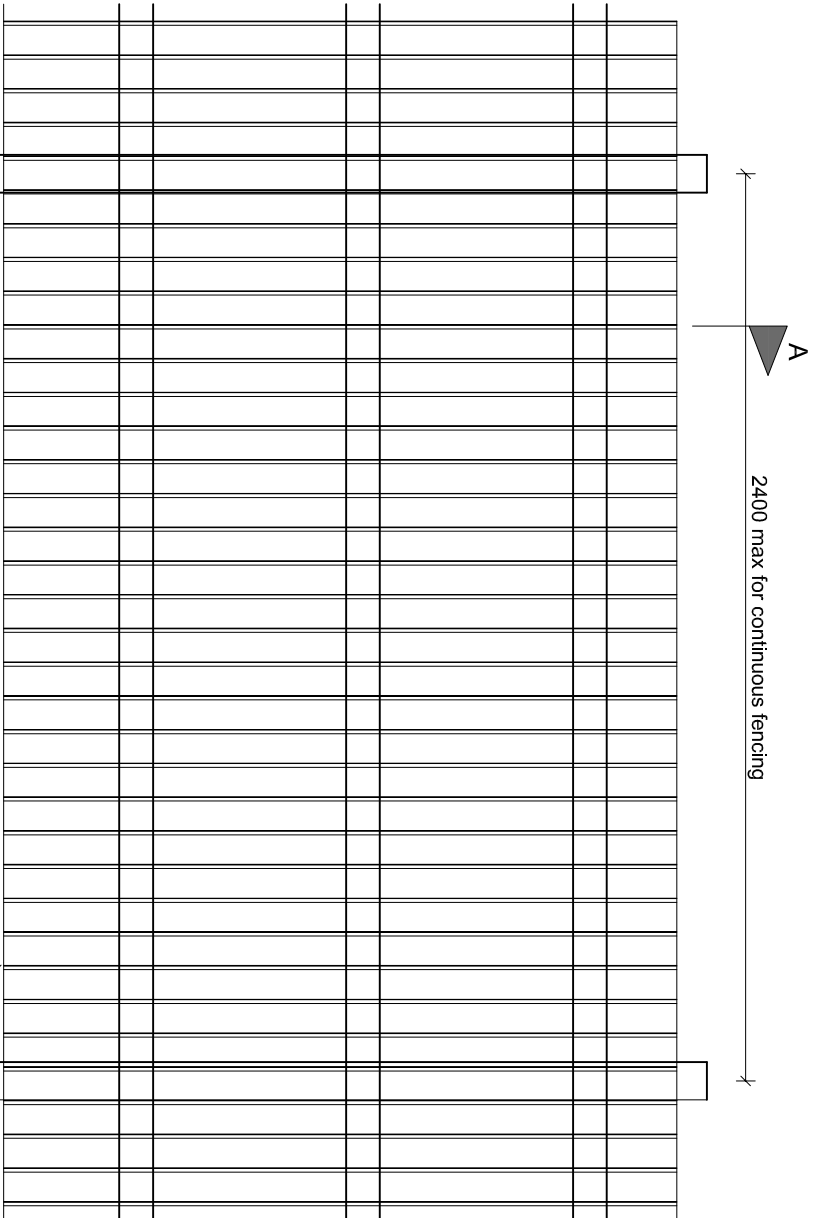




Elevation




- Top of posts to be cut to slope for surface run-off and weather treated
- 100x125 soft wood posts at 2400mm centres.
- 89x38mm sw horizontal rails fixed to posts with 75mm galvanised nails
- 100x14mm wide feathered edged softwood boarding tapered to 8mm, lapped and twice nailed at each position with 50mm long galvanised nails

Close board fence and all components to comply with bs 1722, part 5. All timber to be preserved in accordance with BS 5589 (Category B).

Section A-A

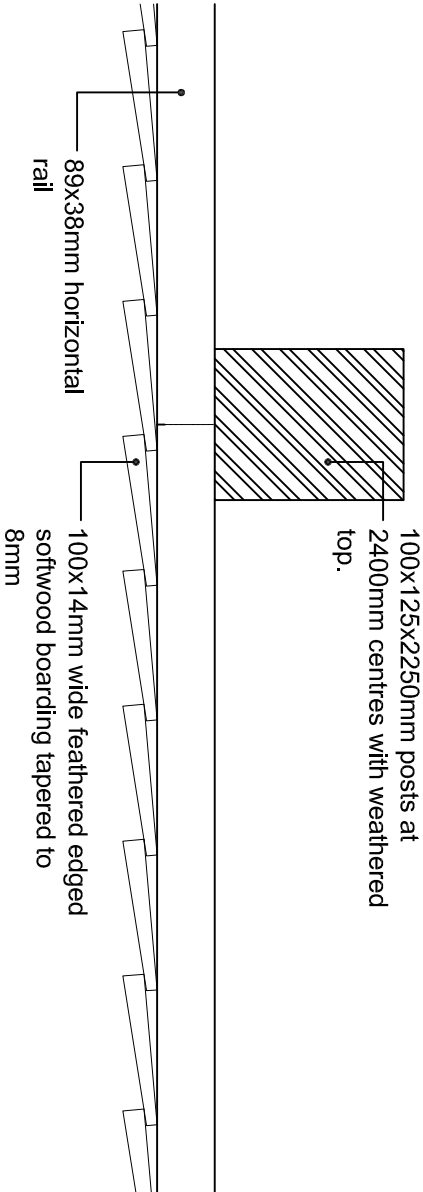

Section Detail

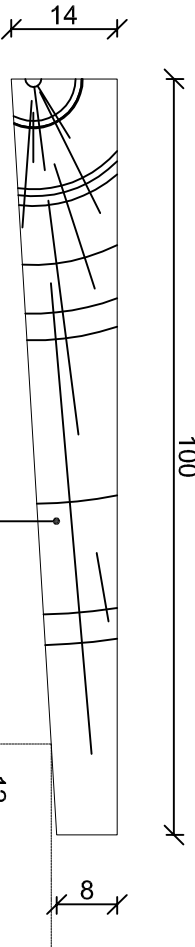

Feather-edge boards 8 to 14mm. 100mm wide x 1630mm high.

NOTES

Posts to be set in holes 300 x 300 x 600 or 800 or 750mm deep and bedded in weak concrete for half their depth below ground level, and remaining depth to be filled with rammed earth.

Posts should be weathered approx. 30 degrees from the horizontal leaving a flat approx. 38mm wide.

Boards should be minimum 100mm wide x 14mm to 8mm nailed to each rail and should lap 12mm min.

Nails: Galv. nails should be used throughout to avoid rust staining on the timber.

Posts to be softwood and to be pretreated with preservative.

Boarding to be softwood pretreated with preservative.

Posts and Fence in accordance with B.S. 1722 pt 5.

Rev A Horizontal rail detail revised & gravel board omitted 29.04.14

Project: External Details

Drawing Title:


1.8M Close Board Fence

Job No:	Drawing No:	Rev:
All	D02	A

Scale:	Drawn By:
1:20/1:5 @ A3	HA Ltd

Date:	Checked By:
03/2014	PC

Persimmon Homes
East Wales



Persimmon House
Llantrisant Business Park,
Llantrisant,
Rhondda Cynon Taf,
CF72 8YP
Tel: 01443 223 5350