


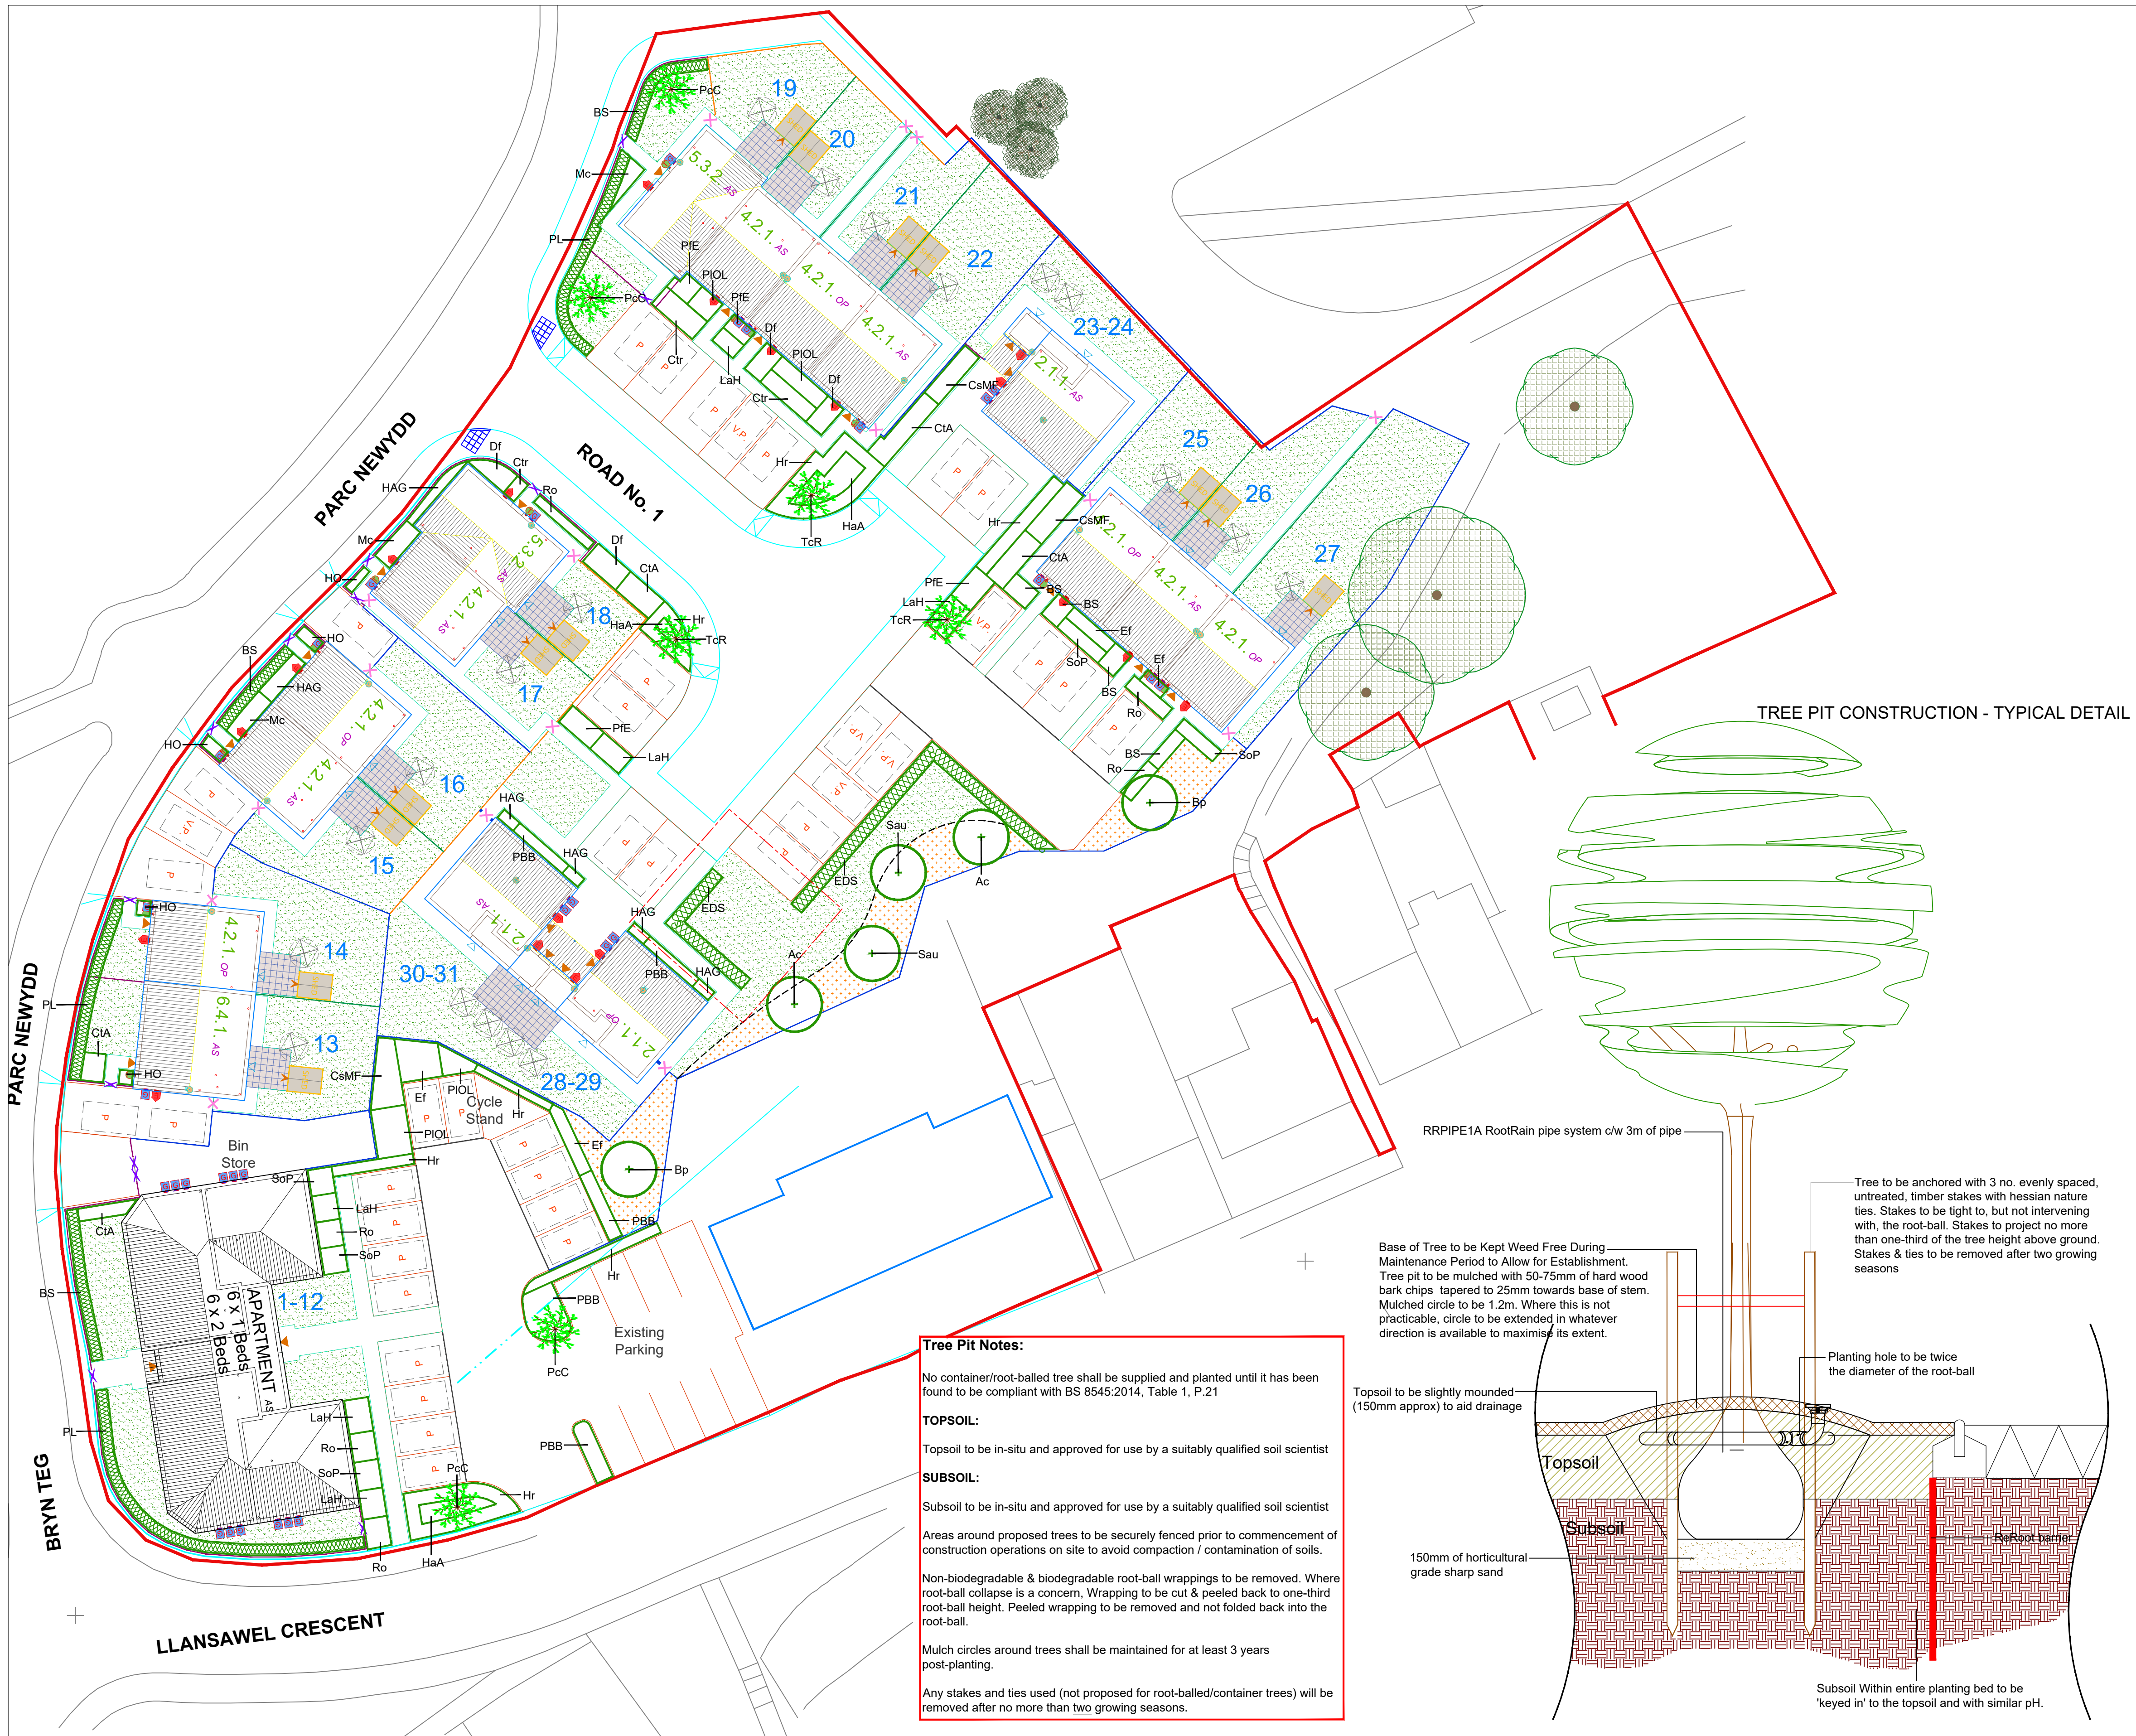

SOFT LANDSCAPE KEY

PROPOSED NATIVE TREE PLANTING
(Refer to schedule for species)

PROPOSED ORNAMENTAL TREE PLANTING
(Refer to schedule for species)

PROPOSED SHRUB PLANTING
(Refer to schedule for species/densities. 200mm maintenance strip to be left clear between shrubs and structures & fences)

PROPOSED ORNAMENTAL HEDGEROWS
(Refer to Plant schedule for species/densities)

PROPOSED GRASS TURF
(Rowlawn Medallion or similar approved. 200mm maintenance strip to be left clear between grass and structures & fences)

PROPOSED WILDFLOWER SEEDING
(Seeding to be Emorsgate EW1 - Woodland Mixture)

PLANT SCHEDULE

NATIVE TREE PLANTING

ABBRV	SPECIES	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
Ac	Acer campestre	AS SHOWN	14 - 16 (g)	ROOTBALLED	--	--
Bp	Betula pubescens	AS SHOWN	14 - 16 (g)	ROOTBALLED	--	--
Sau	Sorbus aucuparia	AS SHOWN	14 - 16 (g)	ROOTBALLED	--	--

ORNAMENTAL TREE PLANTING

ABBRV	SPECIES	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
PcC	Pyrus calleryana Chanticleer	AS SHOWN	14 - 16 (g)	ROOTBALLED	--	--
ToR	Tilia cordata Rancho	AS SHOWN	14 - 16 (g)	ROOTBALLED	--	--

ORNMENTAL HEDGEROW PLANTING


ABBRV	SPP. & PERCENTAGE IN MIX	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
BS	Buxus sempervirens	5 per lin/m	40 - 60 (h)	CON	-	-
EAB	Escallonia Apple Blossom	5 per lin/m	40 - 60 (h)	CON	-	-
PL	Photinia fraseri Little Red Robin	5 per lin/m	40 - 60 (h)	CON	-	-

(Hedgerows to be planted as double staggered rows 500mm apart)

SHRUB PLANTING

ABBRV	SPECIES	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
BS	Brachyglottis Sunshine	4 sqm	30 - 40 (h)	CON	2-3L	
CsMF	Cornus sanguinea Midwinter Fire	3 sqm	30 - 40 (h)	CON	2-3L	
CIA	Chosiya ternata 'Apple Blossom'	4 sqm	30 - 40 (h)	CON	2-3L	
Ctr	Ceanothus thyrsiflorus var. repens	5 sqm	30 - 40 (h)	CON	2-3L	
Df	Dryopteris filix-mas	4 sqm	30 - 40 (h)	CON	2-3L	
Ef	Euonymus fortunei 'Emerald Gaiety'	4 sqm	30 - 40 (h)	CON	2-3L	
HaA	Hydrangea arborescens Annabelle	2 sqm	30 - 40 (h)	CON	2-3L	
HAG	Hebe 'Autumn Glory'	4 sqm	30 - 40 (h)	CON	2-3L	
Ho	Heuchera 'Obsidian'	6 sqm	30 - 40 (h)	CON	2-3L	
Hr	Hebe 'rakaiensis'	4 sqm	30 - 40 (h)	CON	2-3L	
LaH	Lavandula angustifolia 'Hidcote'	5 sqm	30 - 40 (h)	CON	2-3L	
Mc	Molinia caerulea heidebraut	4 sqm	30 - 40 (h)	CON	2-3L	
PBB	Phormium Bronze Baby	4 sqm	30 - 40 (h)	CON	2-3L	
PIE	Potentilla fruticosa 'Elizabeth'	3 sqm	30 - 40 (h)	CON	2-3L	
PIOL	Prunus laurocerasus 'Otto Luyken'	3 sqm	30 - 40 (h)	CON	2-3L	
Ro	Rosmarinus officinalis	4 sqm	30 - 40 (h)	CON	2-3L	
SoP	Salvia officinalis Purpurascens	6 sqm	30 - 40 (h)	CON	2-3L	

TREE PIT CONSTRUCTION - TYPICAL DETAIL

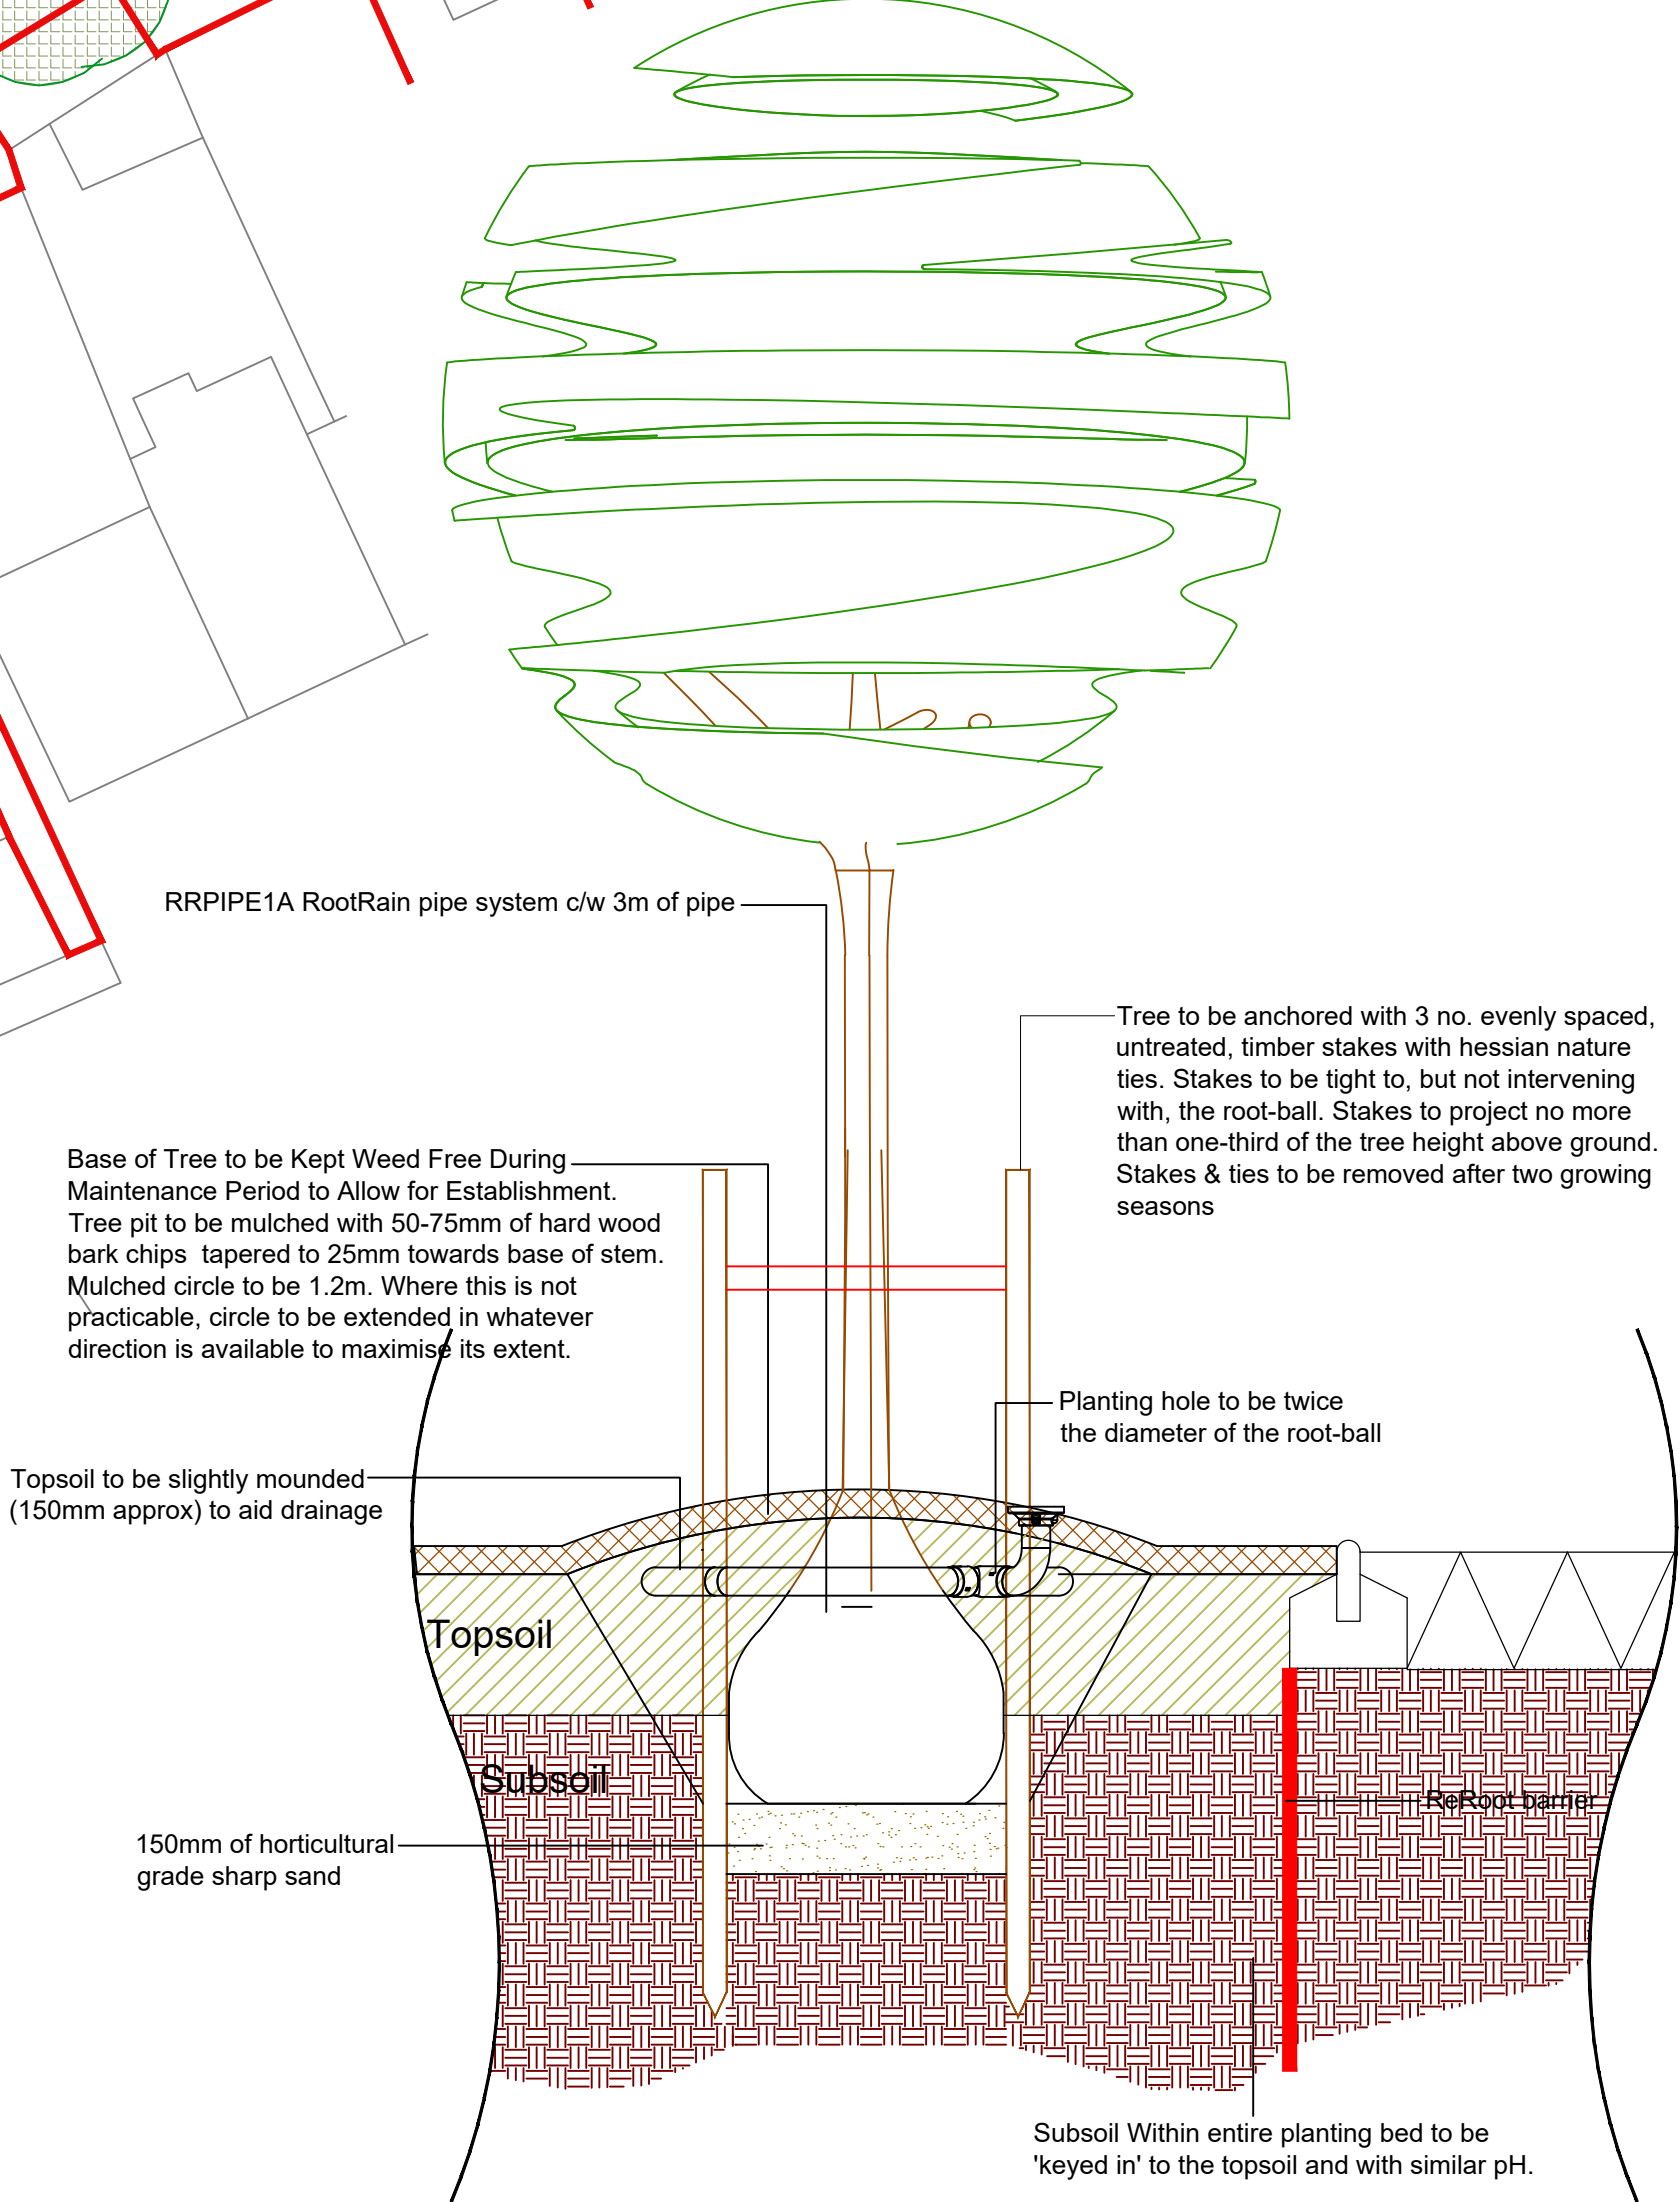

Tree Pit Notes:

No container/root-balled tree shall be supplied and planted until it has been found to be compliant with BS 8545:2014, Table 1, P.21

TOPSOIL:

Topsoil to be in-situ and approved for use by a suitably qualified soil scientist

SUBSOIL:

Subsoil to be in-situ and approved for use by a suitably qualified soil scientist

Areas around proposed trees to be securely fenced prior to commencement of construction operations on site to avoid compaction / contamination of soils.

Non-biodegradable & biodegradable root-ball wrappings to be removed. Where root-ball collapse is a concern, Wrapping to be cut & peeled back to one-third root-ball height. Peeled wrapping to be removed and not folded back into the root-ball.

Mulch circles around trees shall be maintained for at least 3 years post-planting.

Any stakes and ties used (not proposed for root-balled/container trees) will be removed after no more than two growing seasons.

REV	NOTES	BY	DATE

TDA
THE GRANARY
NEWLAND FAWR FARM
LLANGAN
CF35 5DN
TEL: 01446 789367

CLIENT

MORGANSTONE

DRAWING NUMBER	SCALE	
TDA.2571.01	1:250 @ A1	
DRAWN	DATE	
RHC/AMP	OCT 2020	

PROJECT

PARC NEWYDD

DRAWING TITLE

DETAILED SOFT LANDSCAPE PROPOSALS