


File name \\UK-WSPGROUP\COMMON\DATA\PROJECTS\2008\W07049143_CEFN SAESON SCHOOL\02\WIP\PCAT CIVILS\DRAWINGS\04\WSP-278-PCT-DR-D-1100_KERBS FOOTWAYS AND PAVED AREAS.DWG, printed on 03 February 2021 16:11:29, by Cadeby, Dylan

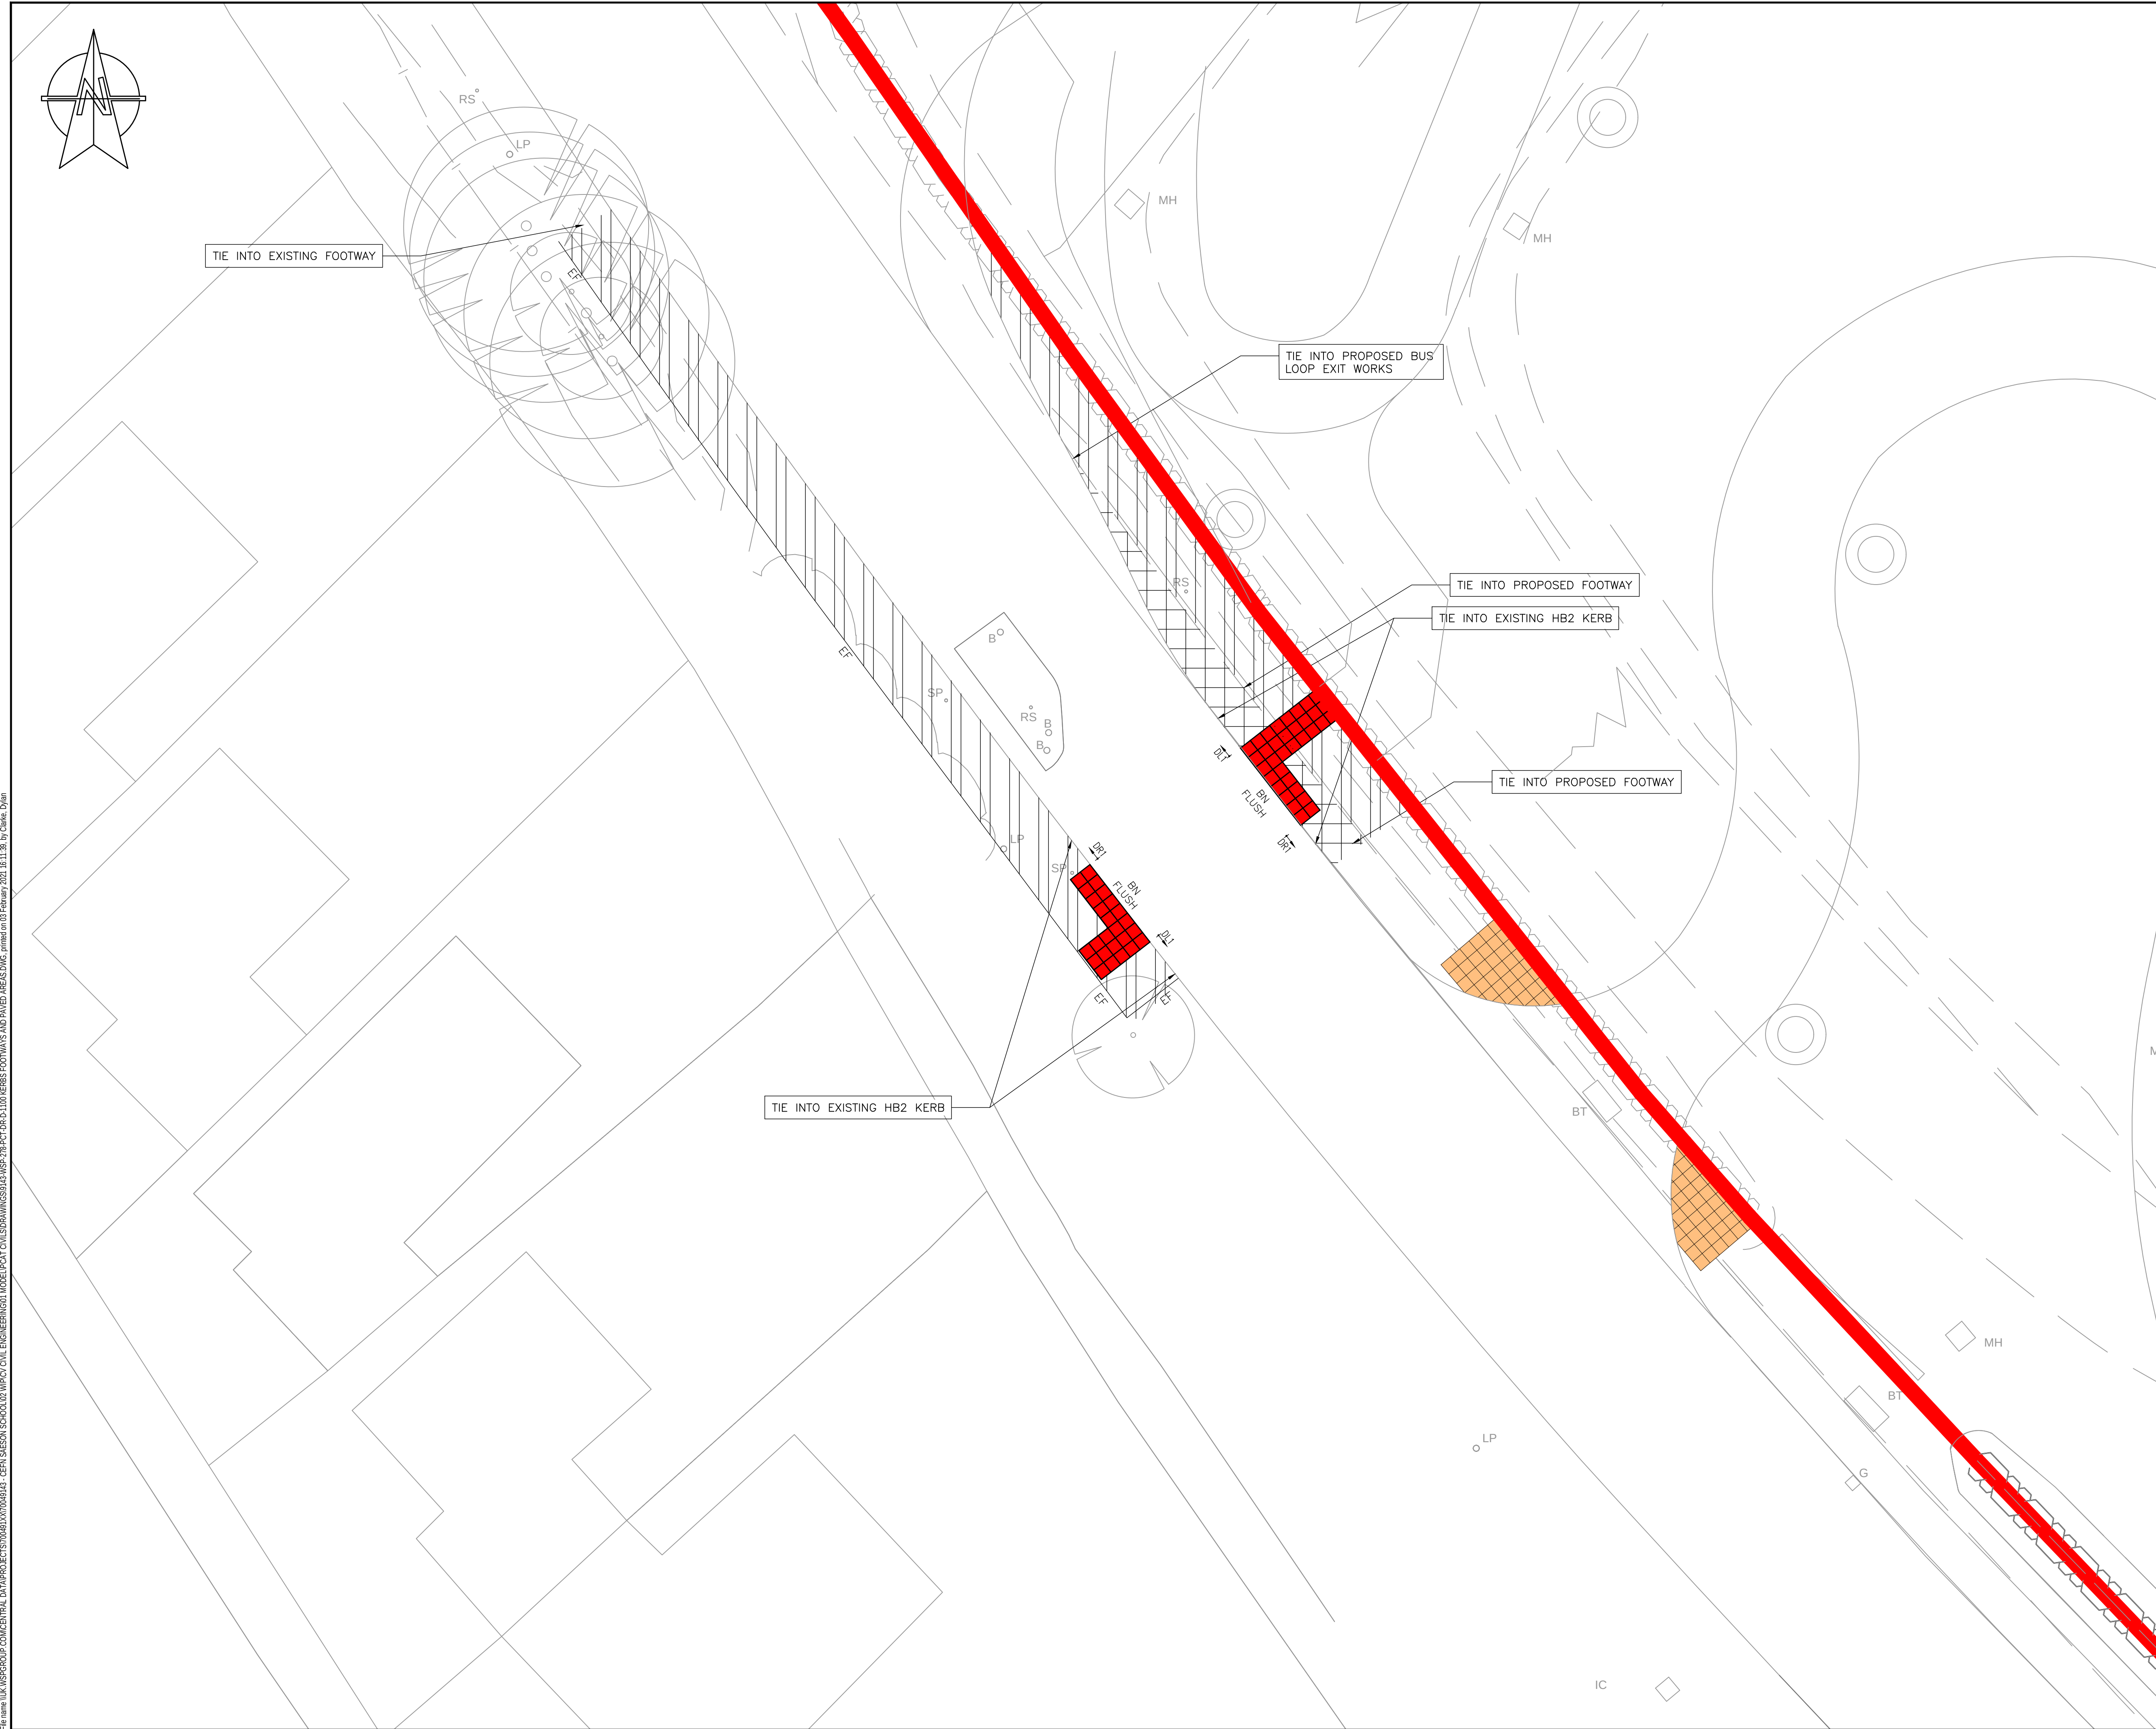

DO NOT SCALE

NOTES:

1. PLEASE DO NOT SCALE THIS DRAWING.

2. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED

3. CONFLICTING INFORMATION SHOWN ON THE DESIGNER DRAWINGS OR DISCREPANCIES BETWEEN THE INFORMATION GIVEN BY THE ENGINEER AND THAT PROVIDED BY OTHERS MUST BE REFERRED TO THE DESIGNER BEFORE THE WORKS COMMENCE.

4. TEMPORARY WORKS DESIGN ASSOCIATED WITH THE CONSTRUCTION OF THE WORKS SHALL BE RESPONSIBILITY OF THE CONTRACTOR.

5. THE CONTRACTOR SHALL MAINTAIN FREE AND OPEN ACCESS TO THE PUBLIC HIGHWAY AND ADJACENT LANDS AND PROPERTIES AT ALL THE TIME UNLESS OTHERWISE AGREED IN WRITING WITH THE INTERESTED PARTIES AND LOCAL HIGHWAY AUTHORITY.

6. CONTRACTOR TO LOCATE EXISTING SERVICES AND VERIFY POSITIONS OF EXISTING APPARATUS PRIOR TO COMMENCEMENT OF WORKS.

7. PRIOR TO THE START OF THE WORKS THE CONTRACTOR SHALL AGREE A REGIME OF FORMATION TESTING WITH THE ADOPTING AUTHORITY. THE FINDINGS OF SUCH TESTING (FOR EXAMPLE CBR READINGS) SHALL BE AGREED WITH THE ADOPTING AUTHORITY AND THE CAPPING/ SUB BASE DESIGN REVIEWED ACCORDINGLY.

8. THE DIVERSION OF ANY PUBLIC SERVICES IS TO BE UNDERTAKEN IN ACCORDANCE WITH THE REQUIREMENTS OF THE RELEVANT AUTHORITY/COMPANY.

9. REDUNDANT INSPECTION CHAMBERS/CONTROL BOXES AND UNDER GROUND DETECTION EQUIPMENT TO BE REMOVED AND LOCAL AREA TO BE REINSTATED UNLESS OTHERWISE DETAILED.

10. THE CONTRACTOR IS TO ALLOW FOR ADJUSTMENT OF ALL EXISTING CHAMBER COVERS AND FULLY FRAMES EFFECTED BY THE WORKS TO SUIT NEW LEVELS.

6. PLEASE REFER TO ALL OTHER HIGHWAY WORKS DRAWINGS BY NPT (T47360.GA1 & T47360.RM1)

KEY

DL1

DR1

BN FLUSH

EBN

DL1 DROPPER KERB LEFT

DR1 DROPPER KERB RIGHT

BN (FLUSH) KERB 6mm UPSTAND (PEDESTRIANS)

EDGING KERB

EXISTING FOOTWAY TO BE REINSTATED TO SUIT NEW FORMATION

PROPOSED FOOTWAY TO FULL DEPTH CONSTRUCTION

RED COLOURED TACTILE PAVING

BUFF COLOURED TACTILE PAVING

THIS PROVISIONAL PRELIMINARY DESIGN IS FOR GUIDANCE PURPOSES ONLY. WSP ACCEPTS NO LIABILITY FOR ANY DAMAGE, LOSS, EXPENSES OR COST INCURRED AS A RESULT OF RELYING ON THE INFORMATION PROVIDED IN THE DESIGN APPRAISAL ESTIMATE. THE APPRAISAL ESTIMATE WAS DERIVED FROM A MIXTURE OF THIRD PARTY INFORMATION AND THE APPLICATION OF WSP'S REASONABLE SKILL AND CARE, BUT MAY BE SUBJECT TO OTHER SUCH INFORMATION AND VARIATIONS OF WHICH WSP IS UNAWARE. THE DESIGN APPRAISAL ESTIMATE SHOULD NOT BE RELED UPON FOR TENDER OR PROCUREMENT PURPOSES. FOR ACCURATE ADVICE A DETAILED DESIGN SHOULD BE CARRIED OUT AT THE APPROPRIATE DESIGN STAGE. THEREFORE, USE OF THE INFORMATION IS ENTIRELY AT YOUR OWN RISK.

P02	03/02/2021	DRC	NPT/MS COMMENTS	SE	AB
P01	25/09/2020	DJM	FIRST ISSUE	SE	AB
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

S4 - FOR CONSTRUCTION APPROVAL

wsp

1 Capital Quarter, Tyndall St, Cardiff, CF10 4BZ, UK
T+ 44 (0) 292 076 9200
wsp.com

CLIENT:

MORGAN SINDALL

ARCHITECT:

POWELL DOBSON

SITE/PROJECT:

CEFN SAESON SCHOOL
NEATH
PROPOSED PCAT CROSSING CIVILS WORKS

TITLE:

KERBS FOOTWAYS AND
PAVED AREAS

SCALE @ A1:	CHECKED:	APPROVED:
1:100	SE	AB
PROJECT NO:	DESIGNED:	DRAWN:
70049143	SE	DJM
		DATE:
		January 21

DRAWING No:	REV:
9143-WSP-278-PCT-DR-D-1100	P02

© WSP UK Ltd