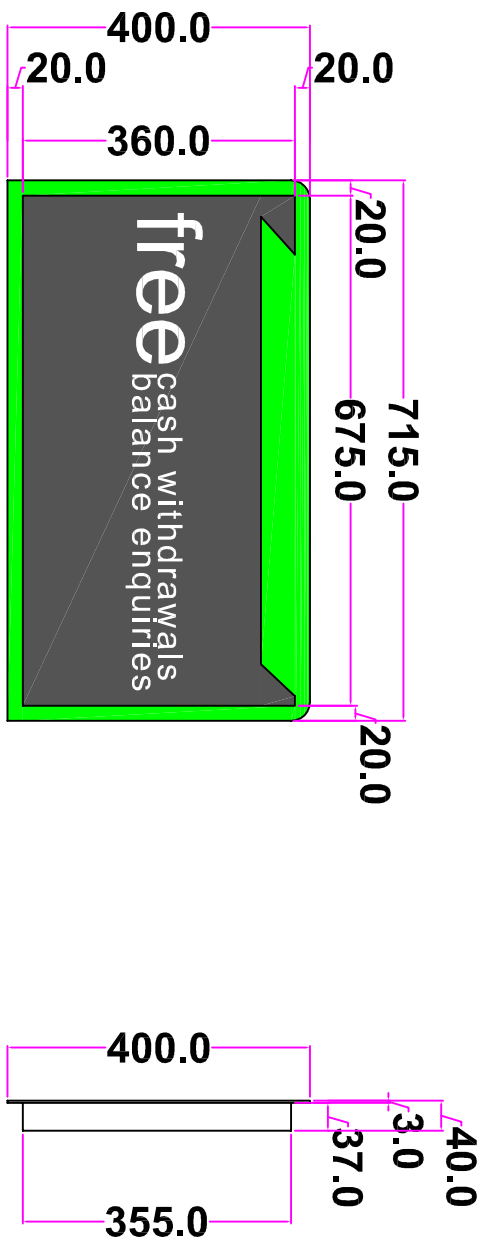


TECHNICAL DATA:
CONSTRUCTED USING DI-BOND

METHOD OF FIXING TO GLASS

- GLASS IS CLEANED AND PRIMED
- VHB (VERY HIGH BONDING) TAPE IS APPLIED TO THE BACK OF THE SIGN AND PRESSED FIRMLY ONTO THE GLASS

METHOD OF FIXING TO BRICK OR LAMINATE PANEL

- SIGN IS SCREWED TO THE BRICK WORK OR TO THE LAMINATE PANEL

CARDTRONICS SERVICE SOLUTIONS DWG

TITLE			
6625 CAE & 5887 EXT FTU NON-ILLUMINATED UNIVERSAL TOP & BOTTOM SIGN			
DRAWN	DATE	SCALE	
CB	20/01/15	1:10 @A3	
REF/ORG NO.	SHEET	REVISION	
000000	B		

04			
03			
02			
01	NON-ILLUMINATED OPTION	17/08/21	NG
REVISION	DESCRIPTION	DATE	BY

drawing approval

NAME:-	
POSITION:-	APPROVED:-
DATE:-	SIGNED:-



CARDTRONICS
Service Solutions