


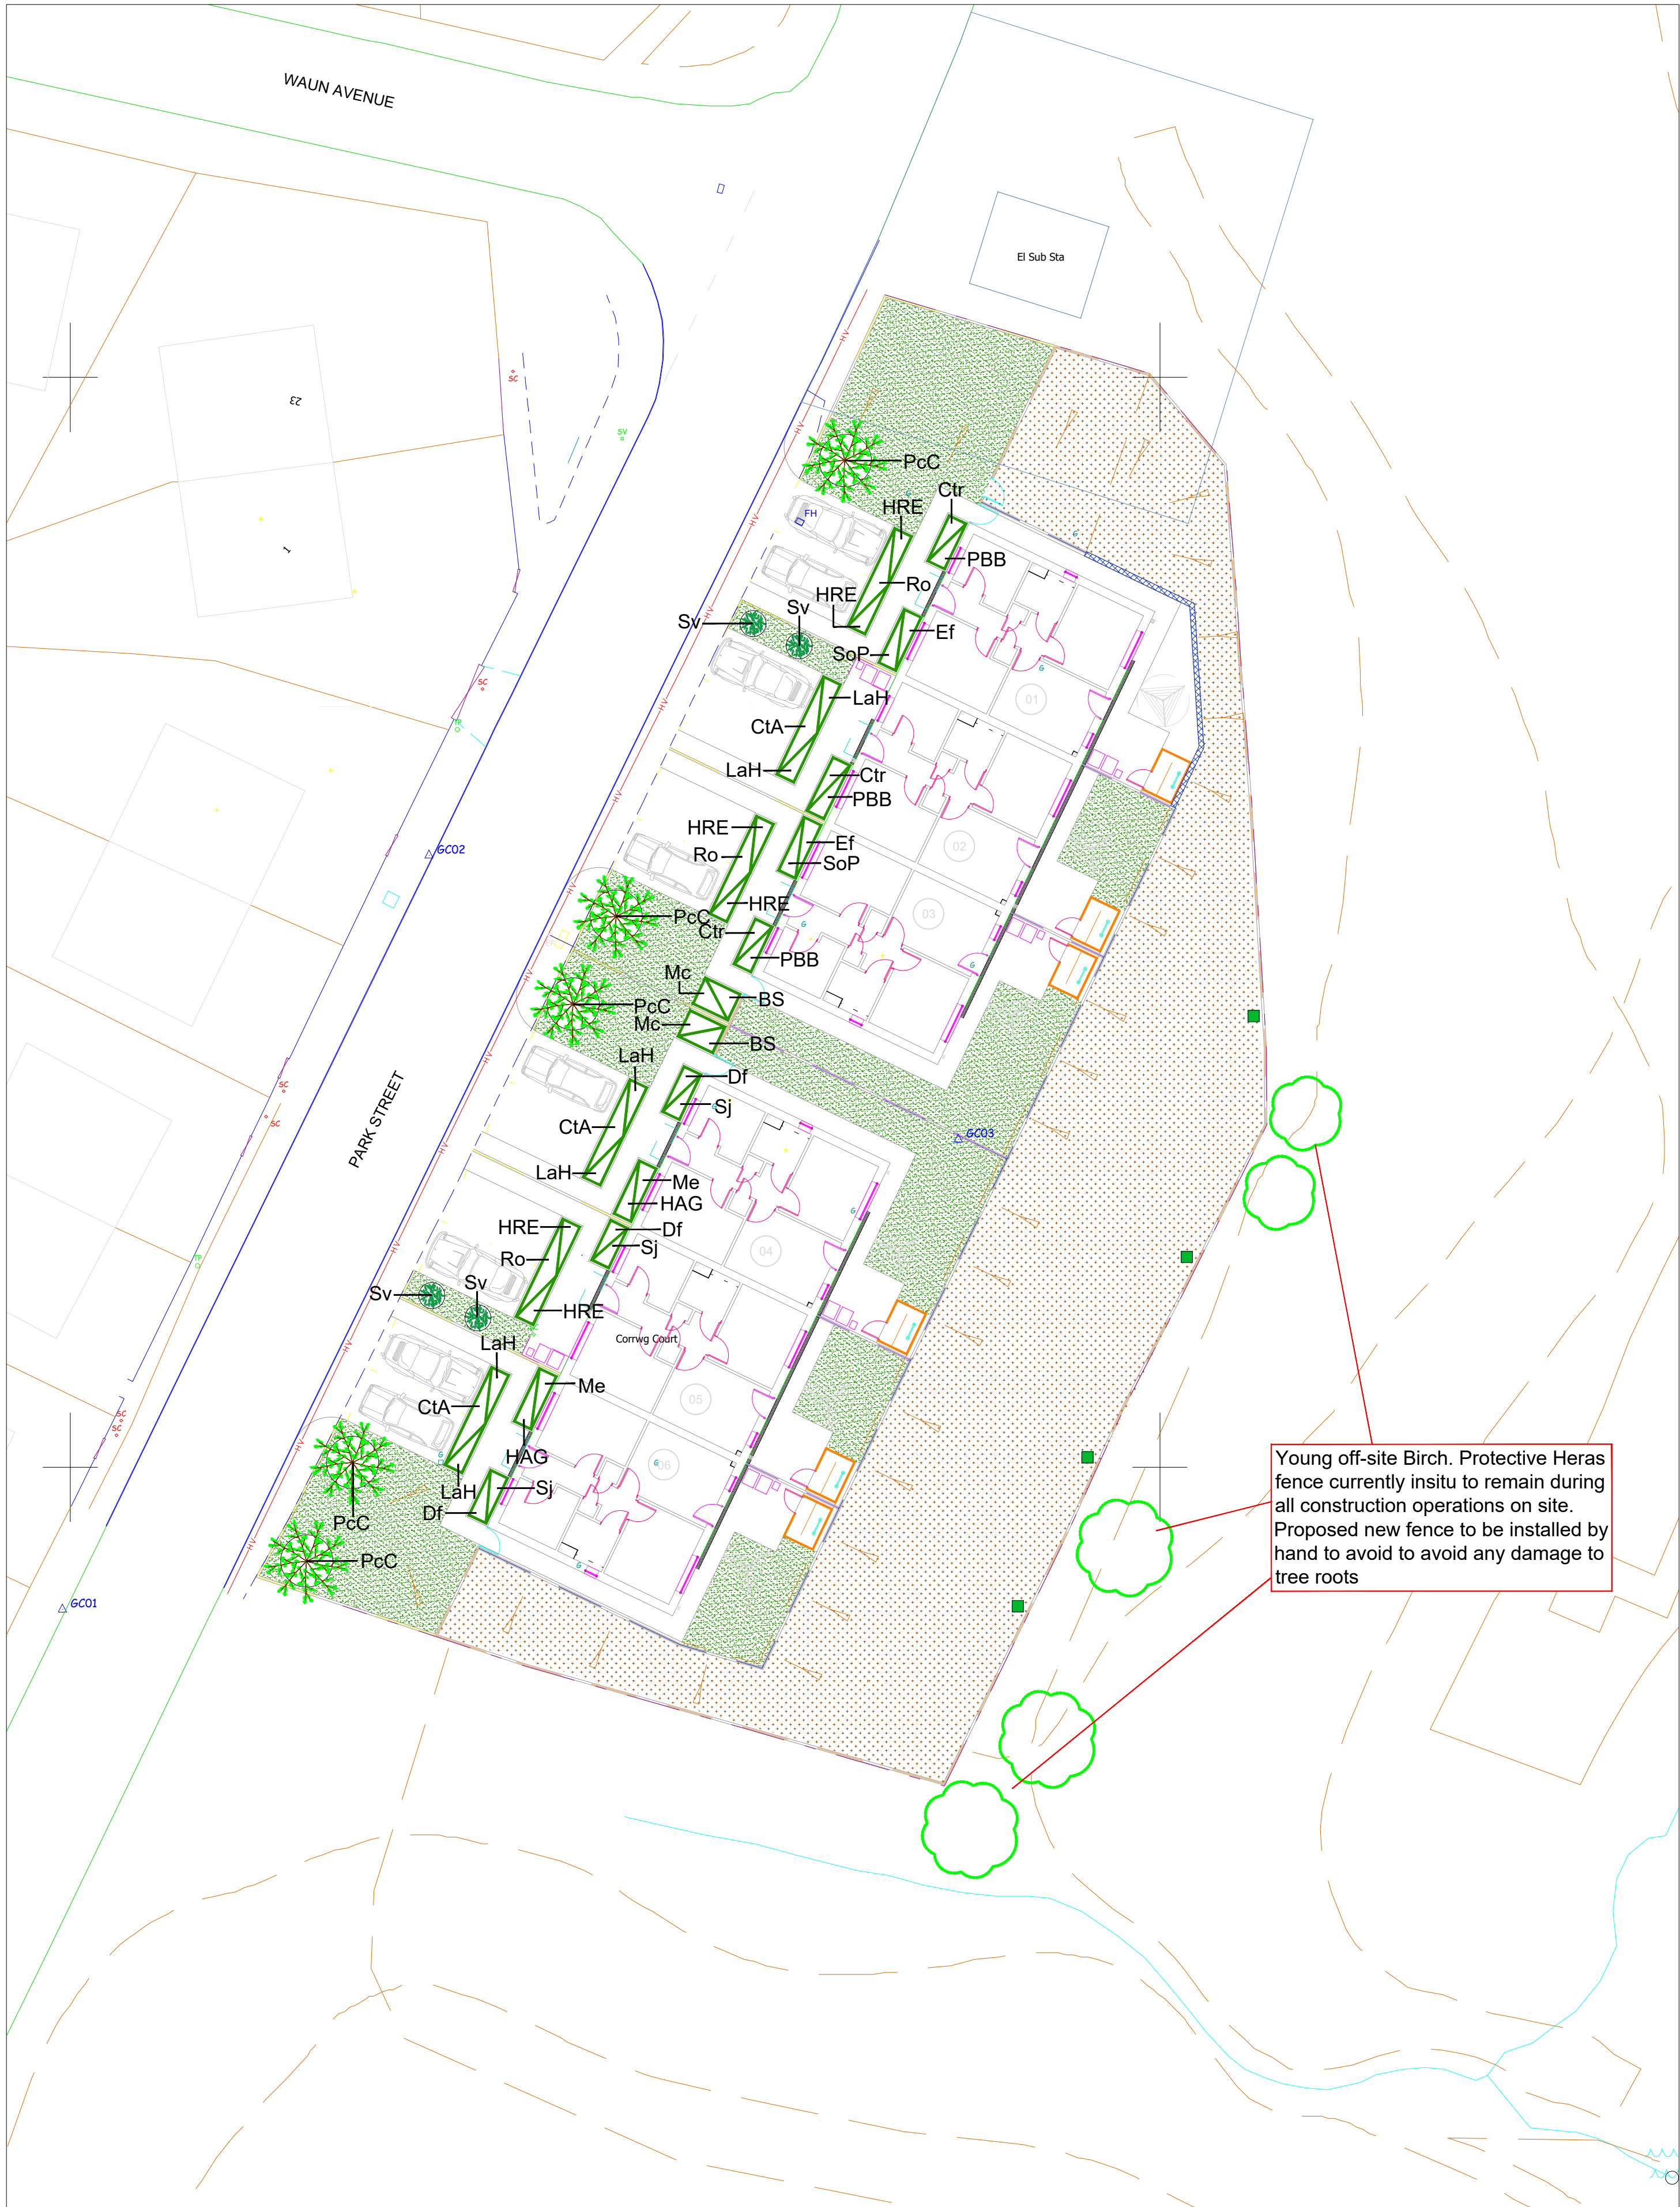

SOFT LANDSCAPE KEY

- EXISTING TREES TO BE RETAINED
- PROPOSED TREE PLANTING
(Refer to schedule for species)
- PROPOSED SPECIMEN SHRUB PLANTING
(Refer to schedule for species)
- PROPOSED SHRUB PLANTING
(Refer to schedule for species/densities)
- PROPOSED GRASS TURF
(Areas to be turfed with Rolawn Medallion)
- PROPOSED WILDFLOWER MIX
(Emorsgate EM1 Meadow Mix)


PLANT SCHEDULE

TREE PLANTING						
ABBRV	SPECIES	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
PoC	Pyrus calleryana Chanticleer	AS SHOWN	16-18 (g)	RB	--	-

SHRUB PLANTING						
ABBRV	SPECIES	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
BS	Brachyglotis Sunshine	4 sqm	30-40 (h)	CON	2-3L	-
CtA	Choisya ternata Apple Blossom	4 sqm	30-40 (h)	CON	2-3L	-
Ctr	Ceanothus thyrsiflorus repens	5 sqm	30-40 (h)	CON	2-3L	-
Df	Dryopteris filix-mas	4 sqm	30-40 (h)	CON	2-3L	-
Ef	Euonymus fortun. Emerald Gaiety	4 sqm	30-40 (h)	CON	2-3L	-
HRE	Hebe Red Edge	6 sqm	30-40 (h)	CON	2-3L	-
LaH	Lavandula angustifolia 'Hidcote'	5 sqm	30-40 (h)	CON	2-3L	-
Mc	Molinia caerulea 'Heidebraut'	4 sqm	30-40 (h)	CON	2-3L	-
Me	Mahonia eurybracteata 'Soft Caress'	3 sqm	30-40 (h)	CON	2-3L	-
PBB	Phormium Bronze Baby	4 sqm	30-40 (h)	CON	2-3L	-
Ro	Rosmarinus officinalis	4 sqm	30-40 (h)	CON	2-3L	-
Sj	Skimmia japonica Rubella	3 sqm	30-40 (h)	CON	2-3L	-
SoP	salvia officinalis Purpurascens	6 sqm	30-40 (h)	CON	2-3L	-

SPECIMEN SHRUB PLANTING						
ABBRV	SPECIES	DENSITY	HEIGHT/GIRTH	ROOT COND	POT SIZE	TOTAL
AS KEY	Syringa meyeri 'Palibin'	AS SHOWN	--	CON	10L	-

TREE PIT CONSTRUCTION - TYPICAL DETAIL

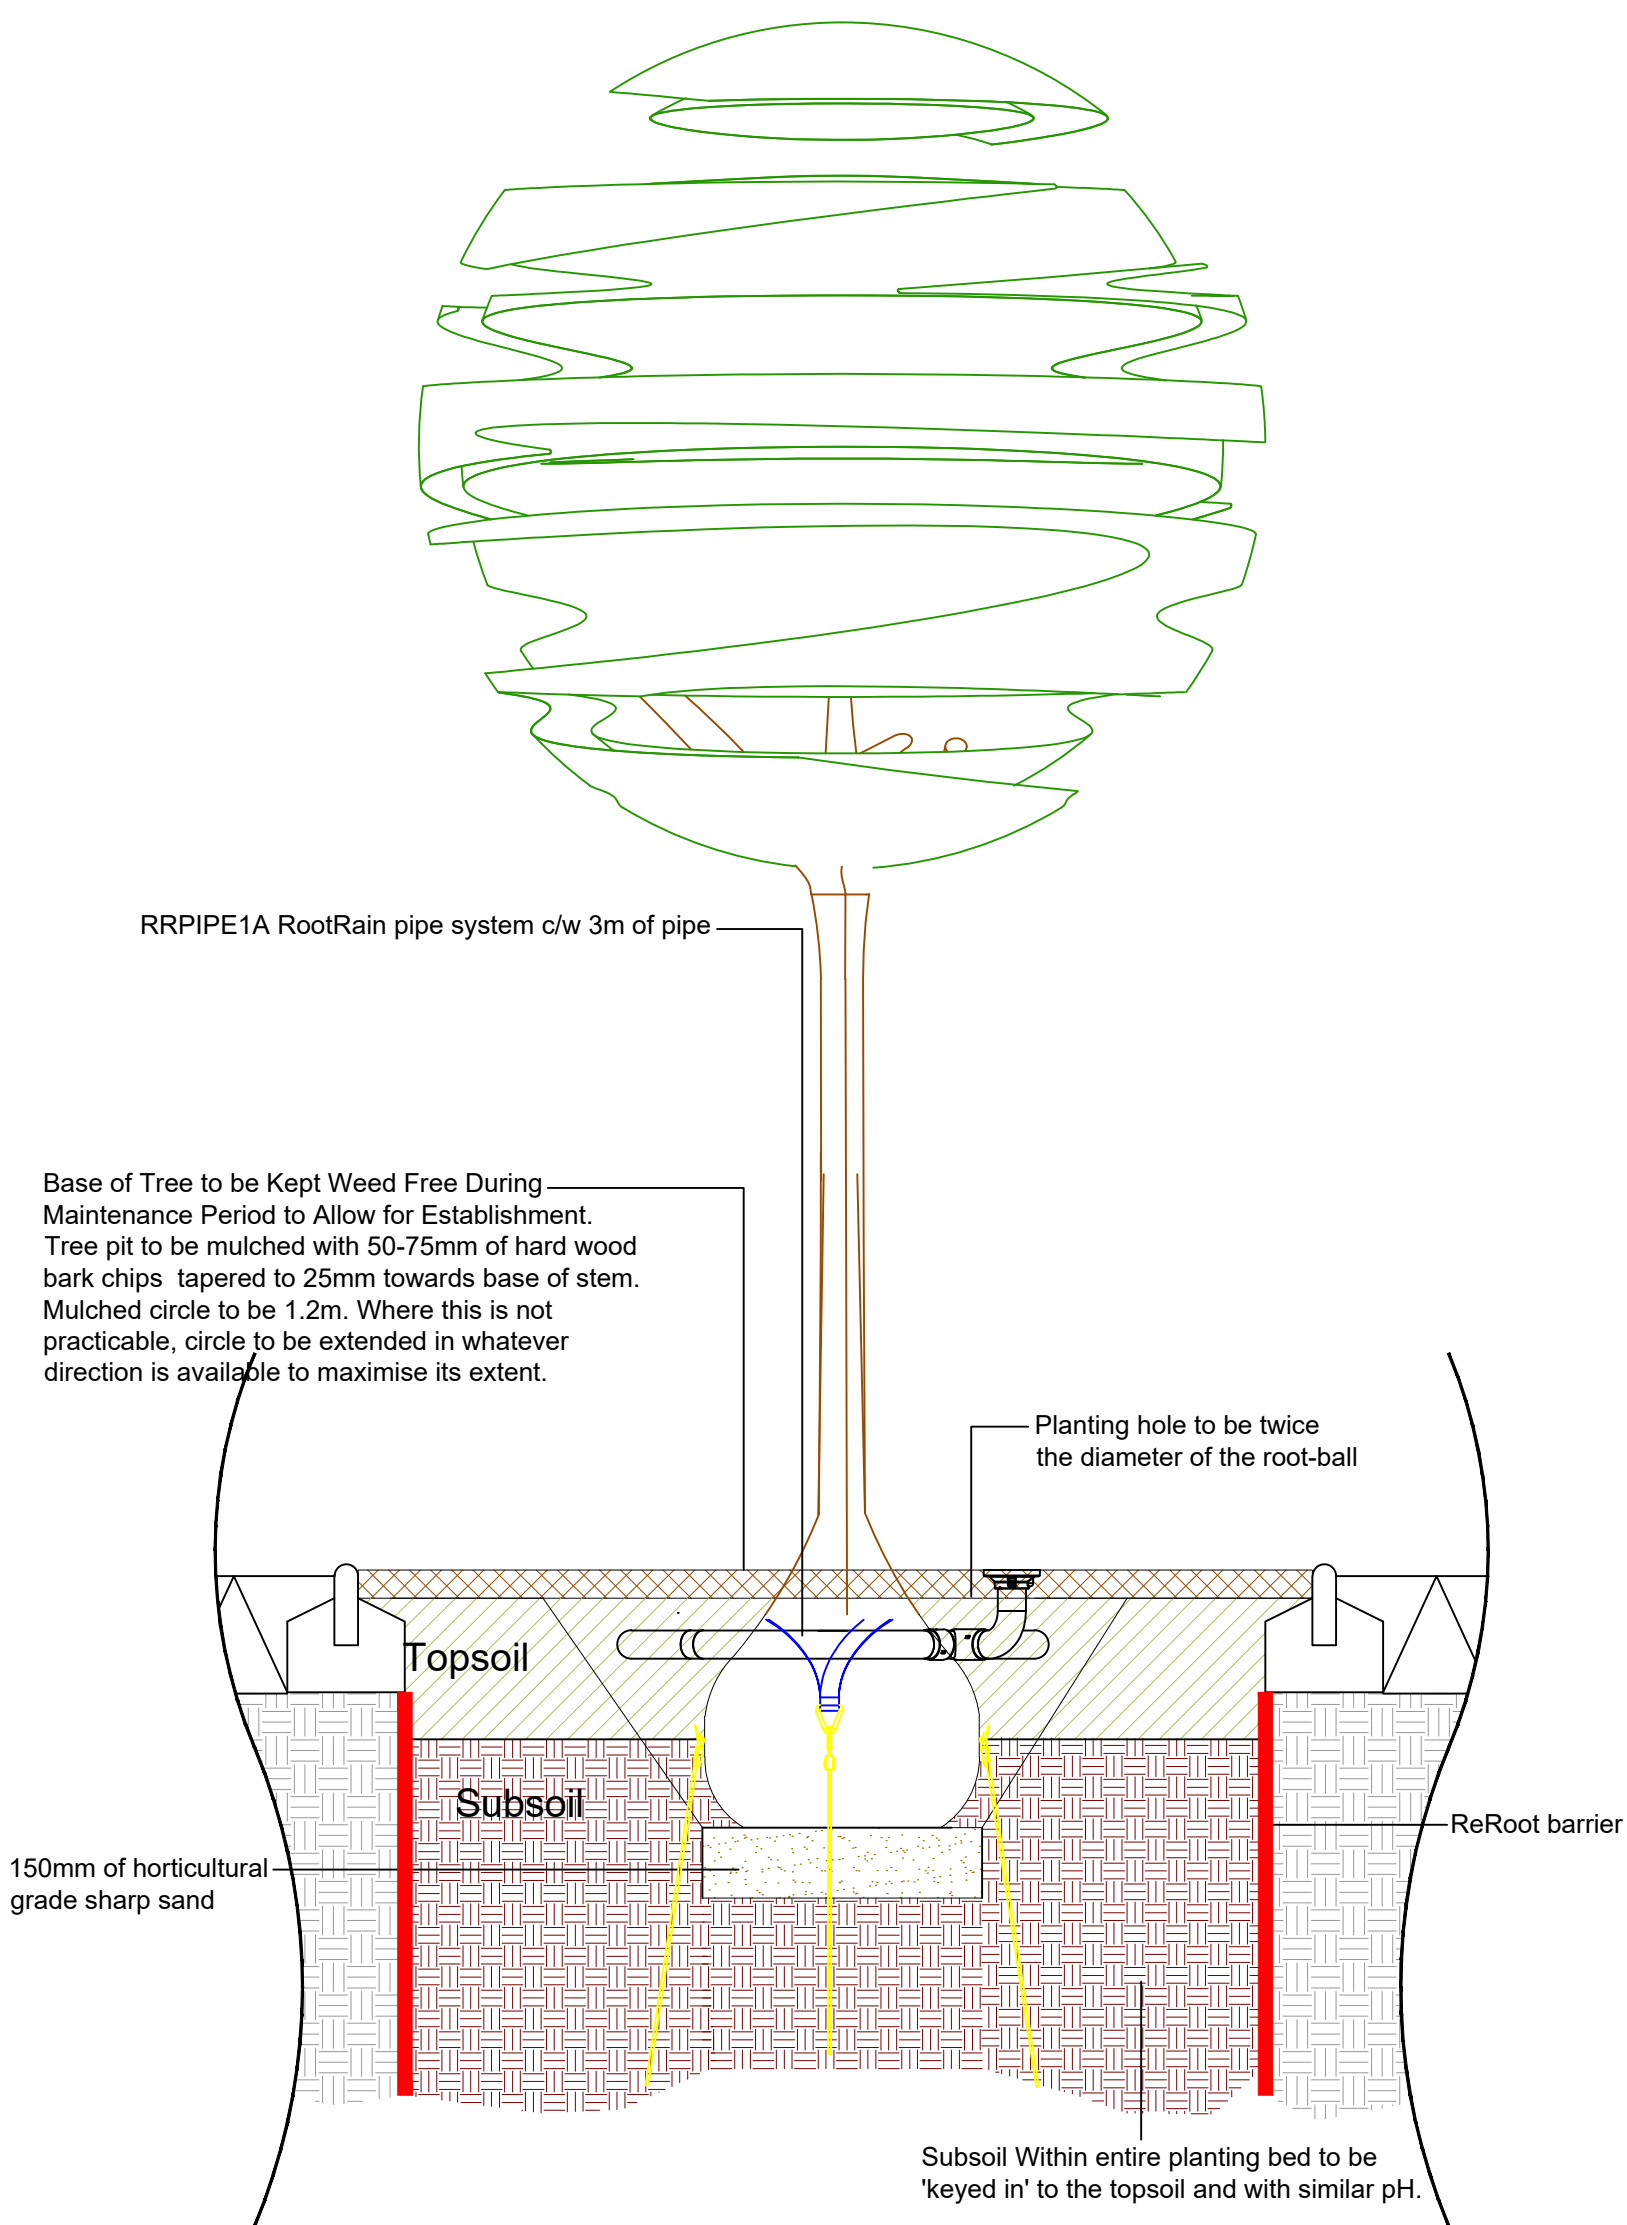

Tree Pit Notes:

No container/root-balled tree shall be supplied and planted until it has been found to be compliant with BS 8545:2014, Table 1, P.21

TOPSOIL:

Topsoil to be in-situ and approved for use by a suitably qualified soil scientist

SUBSOIL:

Subsoil to be in-situ and approved for use by a suitably qualified soil scientist

Areas around proposed trees to be securely fenced prior to commencement of construction operations on site to avoid compaction / contamination of soils.

Non-biodegradable & biodegradable root-ball wrappings to be removed. Where root-ball collapse is a concern, Wrapping to be cut & peeled back to one-third root-ball height. Peeled wrapping to be removed and not folded back into the root-ball.

Mulch circles around trees shall be maintained for at least 3 years post-planting.

Any stakes and ties used (not proposed for root-balled/container trees) will be removed after no more than two growing seasons.

TDA
THE GRANARY
NEWLAND FAWR FARM
VALE OF GLAMORGAN
CF35 5DN
TEL: 01446 789367


Environment • Landscape • Design

CLIENT


ENCON CONSTRUCTION

DRAWING NUMBER
TDA.2608.01

SCALE
1:200 @ A1

DRAWN
RHC/AMP

DATE
MARCH 2021



PROJECT

PARK STREET, GLYNCCORRWG

DRAWING TITLE

DETAILED SOFT LANDSCAPE PROPOSALS