

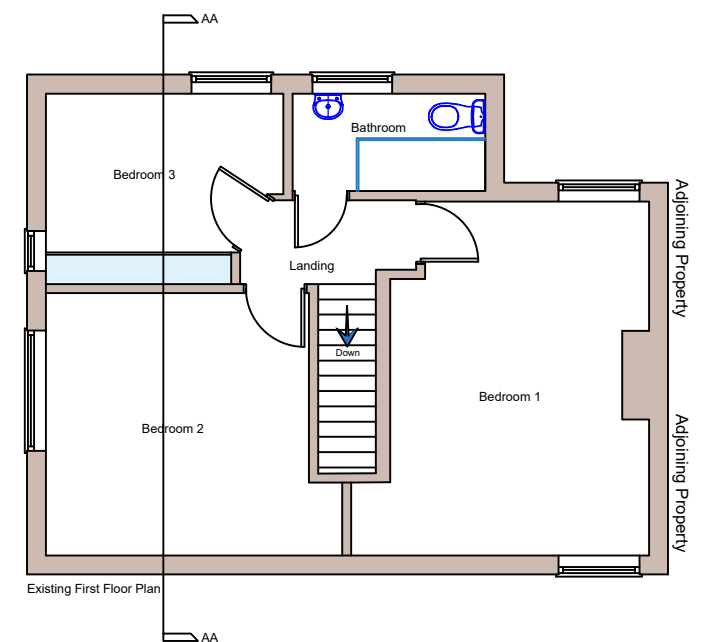
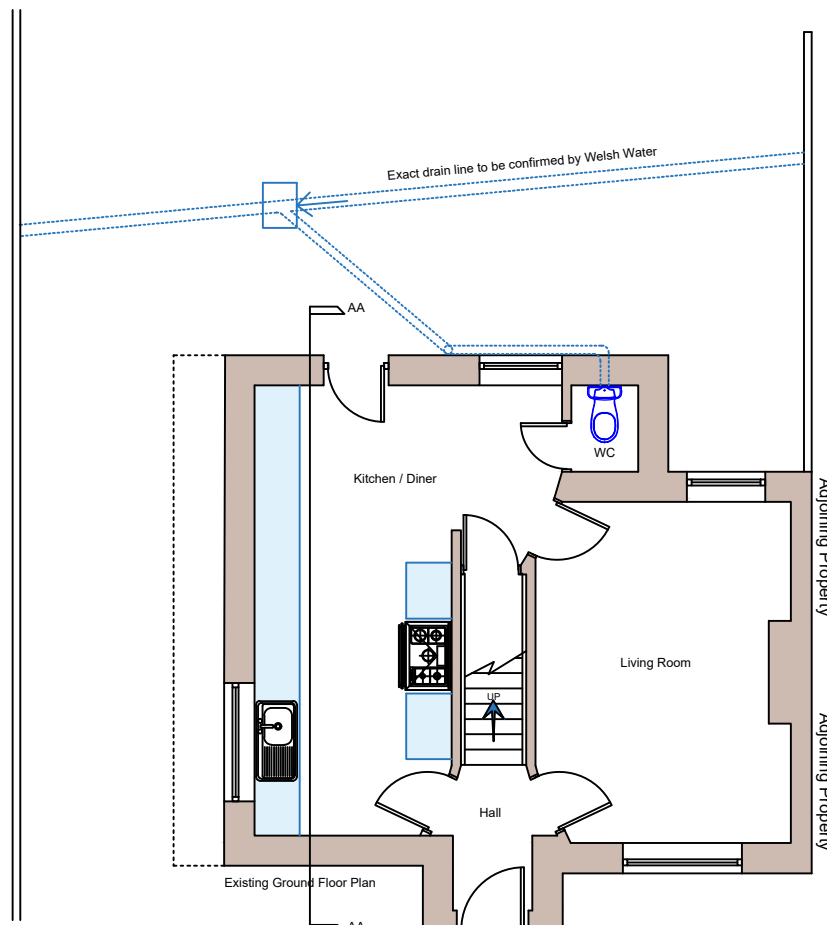
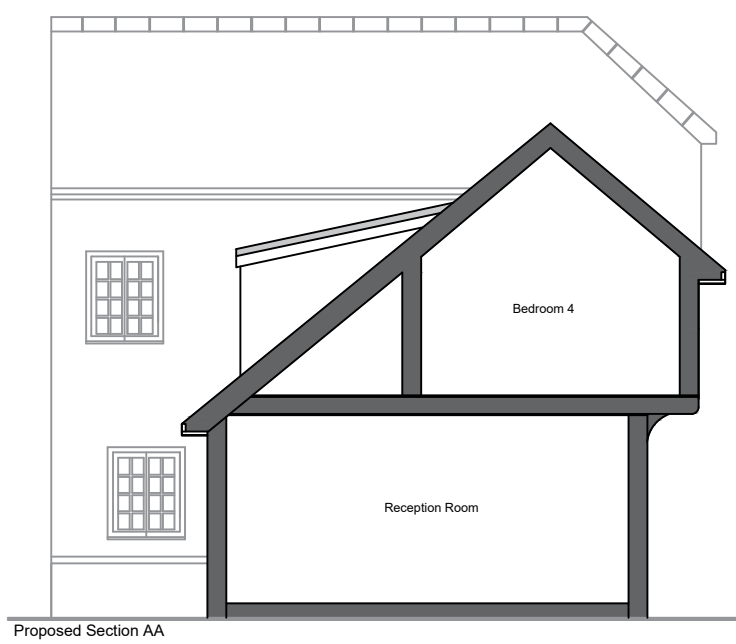
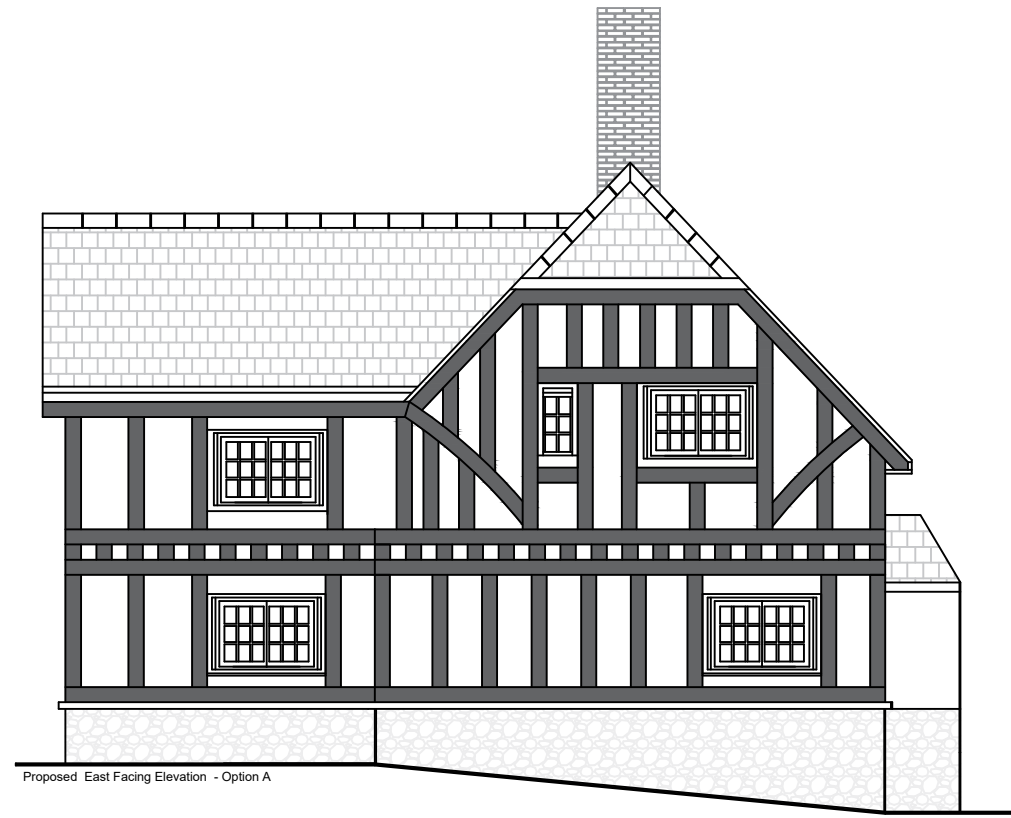
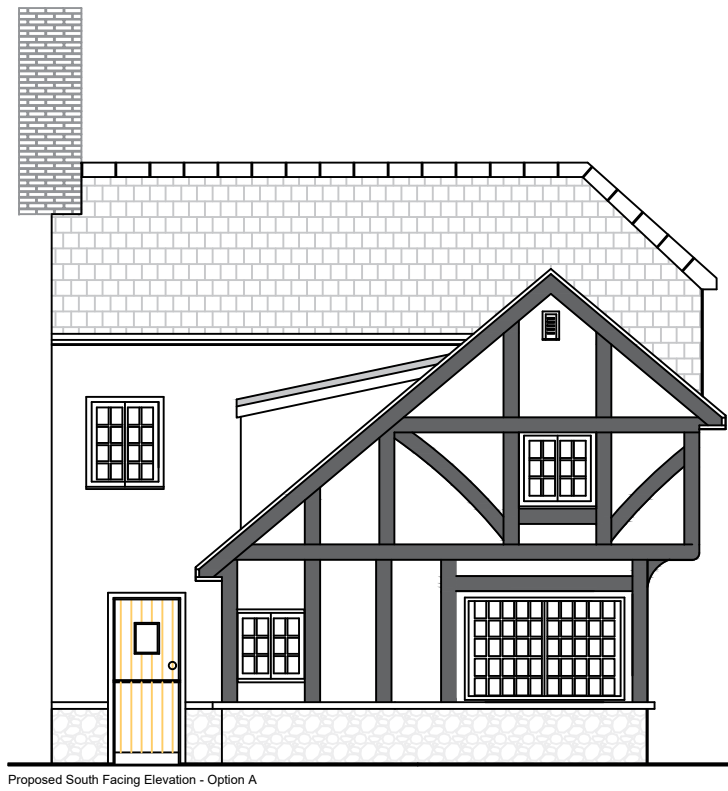
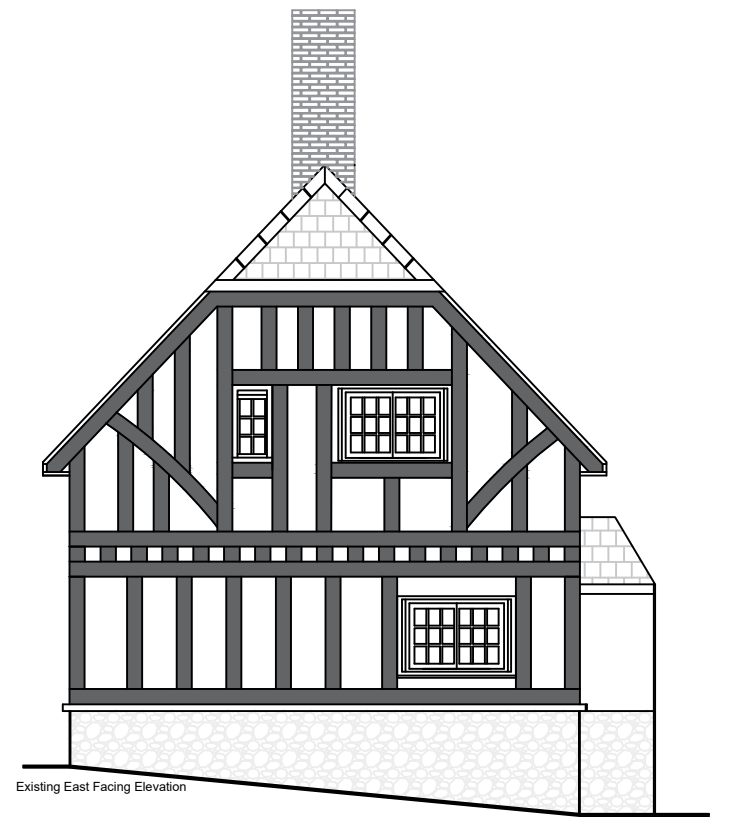


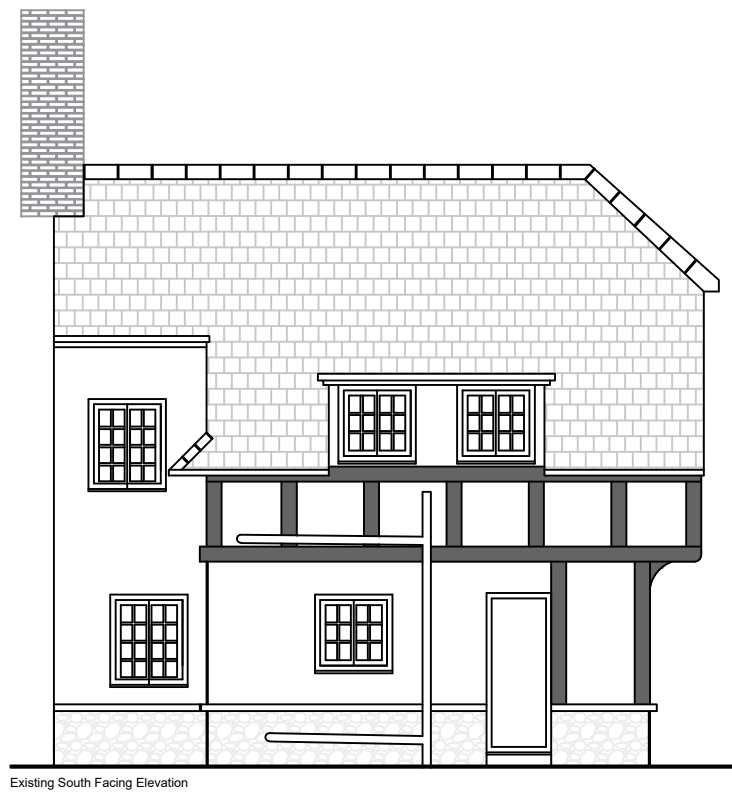

Finishes Schedule

- 1) White UPVC windows/doors to match existing colour and style
- 2) Concrete profiled interlocking roof tiles to match existing style & colour
- 3) Exposed timber post & beam structure, coated/decorated to match existing. Pegged connection methods/detail to be retained.
- 4) Textured render infill wall panels, decorated to match existing.
- 5) Face stonework plinth with cill detail to be retained, to match existing.
- 6) RWG/RWP black round to match existing.
- 7) White UPVC fascias, soffits to match existing.
- 8) Conservation double Velux windows.
- 9) Vaulted ceiling with exposed oak structure.
- 10) Half round concrete ridge tiles to match existing
- 11) New dormer window obscure glass to bathroom. Roof tiles to match existing. Dormer window (side) wall to be finished in slates, two dormer return walls to be rendered to match main house walls.
- 12) Bat Box to be installed on rear gable as per the attached bat survey.

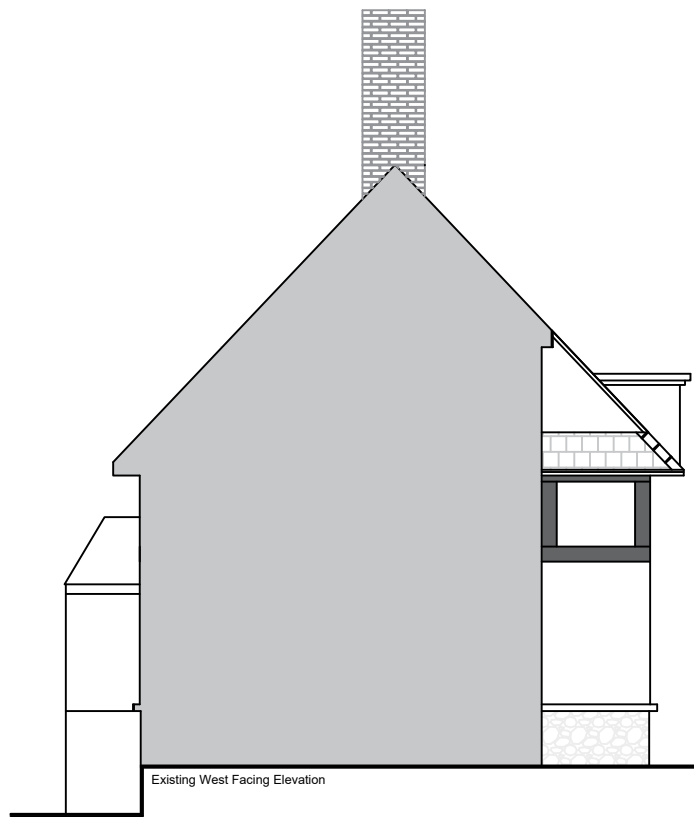