


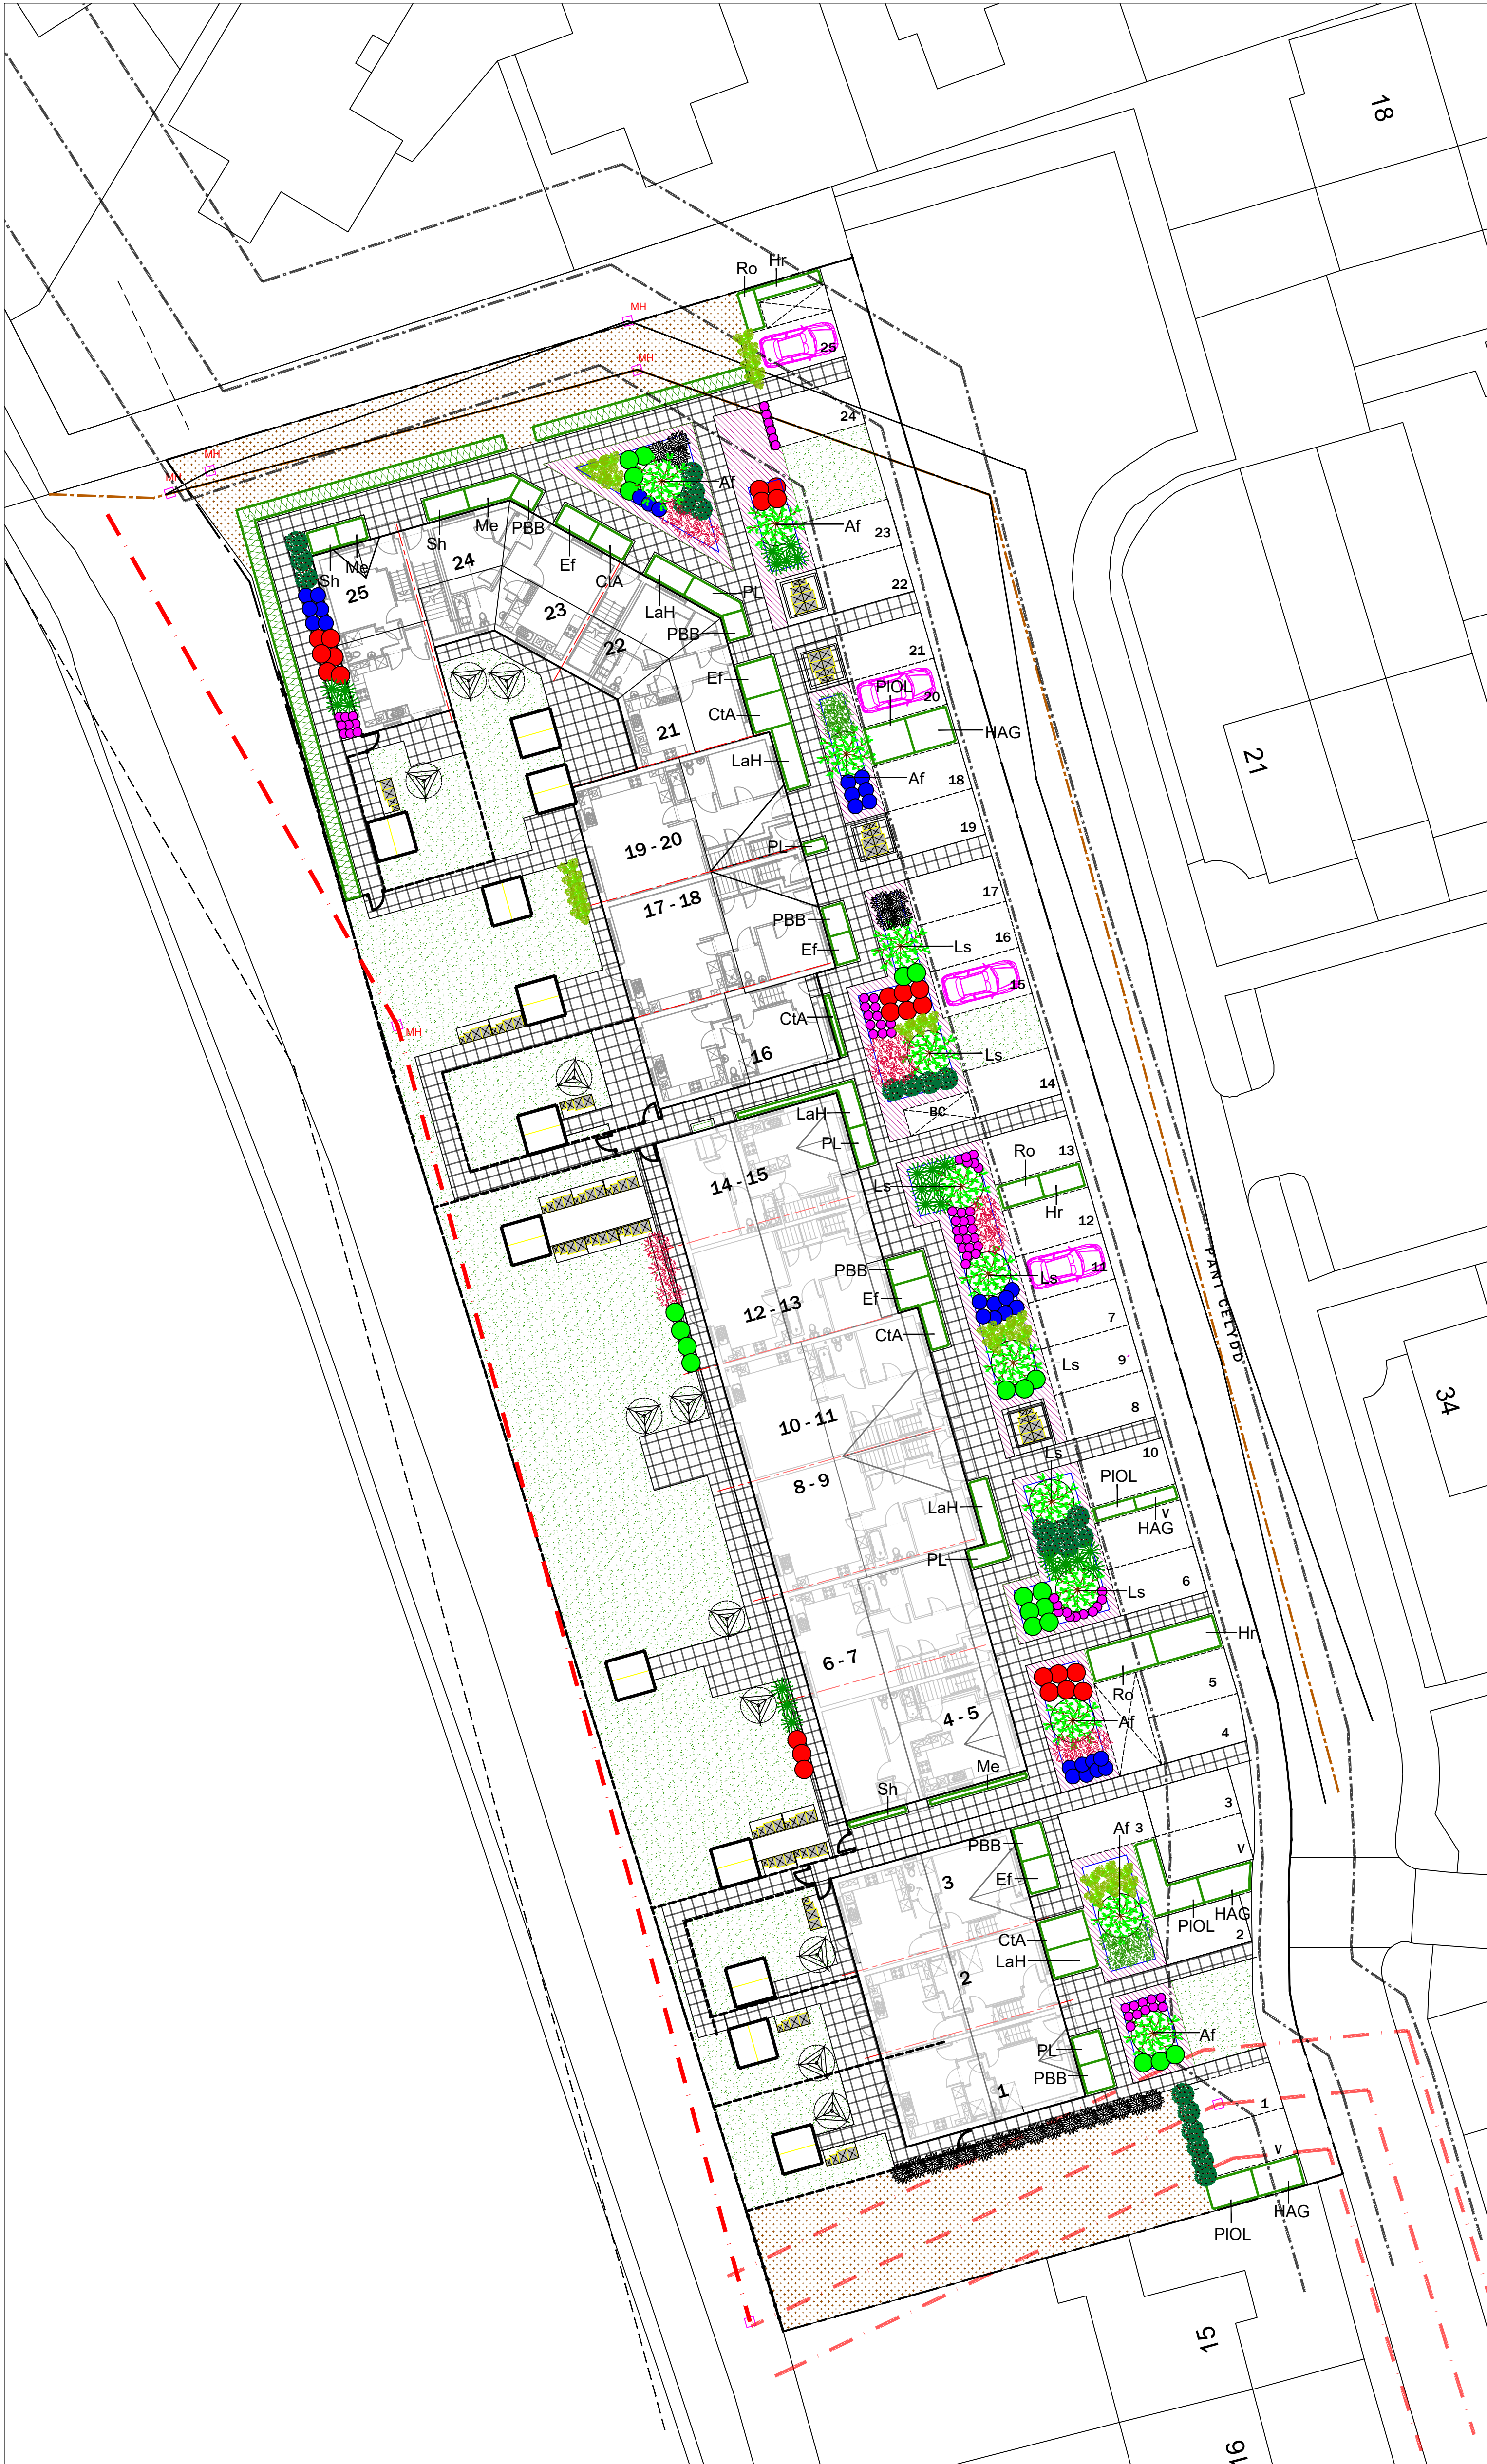

SOFT LANDSCAPE KEY

- PROPOSED ORNAMENTAL TREE PLANTING (Refer to schedule for species)
- PROPOSED ORNAMENTAL HEDGEROWS (Refer to schedule for species/densities)
- PROPOSED SHRUB PLANTING (Refer to schedule for species/densities)
- PROPOSED TURF AREAS (Turf to be Rowlawm Medallion or similar approved. 200mm maintenance strip to be left clear between grass and structures & fences)
- PROPOSED GROUNDCOVER (Refer to schedule for species/densities)
- PROPOSED WILDFLOWER 1 (Emorgate EM1 - Meadow Mix)

RAIN GARDEN PLANTING (density as shown)


- Calamagrostis brachytricha (30-40 Con 2-3L - density as shown)
- Carex pseudocyperus (30-40 Con 2-3L - density as shown)
- Deschampsia cespitosa (30-40 Con 2-3L - density as shown)
- Dryopteris affinis (30-40 Con 2-3L - density as shown)
- Helleborus foetidus (30-40 Con 2-3L - density as shown)
- Juncus effusus (30-40 Con 2-3L - density as shown)
- Leucothoe Scarletta 'Zebid' (30-40 Con 2-3L - density as shown)
- Asplenium scolopendrium (30-40 Con 2-3L - density as shown)
- Polystichum setiferum (30-40 Con 2-3L - density as shown)
- Skimmia japonica 'Fragrans' (male) (30-40 Con 2-3L - density as shown)

PLANT SCHEDULE

ORNAMENTAL TREE PLANTING									
ABBREV	SPECIES	DENSITY	HEIGHT	GIRTH	ROOT	COND	POT	SIZE	TOTAL
Al	Acer freemanii 'Armstrong'	AS	12 - 14 (g)		ROOTBALLED	---	---	---	---
La	Liquidambar styraciflua 'Stender Silhouette'	SHOWN	12 - 14 (g)		ROOTBALLED	---	---	---	---
ORNAMENTAL HEDGEROW PLANTING									
ABBREV	SPECIES	DENSITY	HEIGHT	GIRTH	ROOT	COND	POT	SIZE	TOTAL
AS KEY	flex crenata	5 per 10m	40 - 60 (h)		CON	---	---	---	---
(Hedgerows to be planted as double staggered rows 500mm apart)									
GROUNDCOVER PLANTING									
ABBREV	SPECIES	DENSITY	HEIGHT	GIRTH	ROOT	COND	POT	SIZE	TOTAL
AS KEY	Pachysandra terminalis	8 sqm	30 - 40 (h)		CON	---	---	---	---
SHRUB / PERENNIAL / GRASS PLANTING									
ABBREV	SPECIES	DENSITY	HEIGHT	GIRTH	ROOT	COND	POT	SIZE	TOTAL
CIA	Choisyia ternata Apple Blossom	4 sqm	30 - 40 (h)		CON	---	---	---	---
ET	Eurogynium fortunei 'Emerald Candy'	4 sqm	30 - 40 (h)		CON	---	---	---	---
HAG	Hebe Autumn	4 sqm	30 - 40 (h)		CON	---	---	---	---
HR	Hebe rakaisensis	4 sqm	30 - 40 (h)		CON	---	---	---	---
LaH	Lavandula angustifolia 'Hidcot'	5 sqm	30 - 40 (h)		CON	---	---	---	---
Me	Mahonia oregonensis 'soft carress'	5 sqm	30 - 40 (h)		CON	---	---	---	---
PBB	Phoradendron 'Bronze Baby'	4 sqm	30 - 40 (h)		CON	---	---	---	---
PL	Prodris fraseri 'Little Red Robin'	4 sqm	30 - 40 (h)		CON	---	---	---	---
PIOL	Prunella laurocerasus Otto Luyken	4 sqm	30 - 40 (h)		CON	---	---	---	---
Rb	Rosa rugosa officinalis	4 sqm	30 - 40 (h)		CON	---	---	---	---
Sh	Sarcococca hookeriana 'Tony Schilling'	3 sqm	30 - 40 (h)		CON	---	---	---	---

Detail 1 - Tree Pit in Soft Landscape

Detail 2 - Tree Pit in Rain Gardens

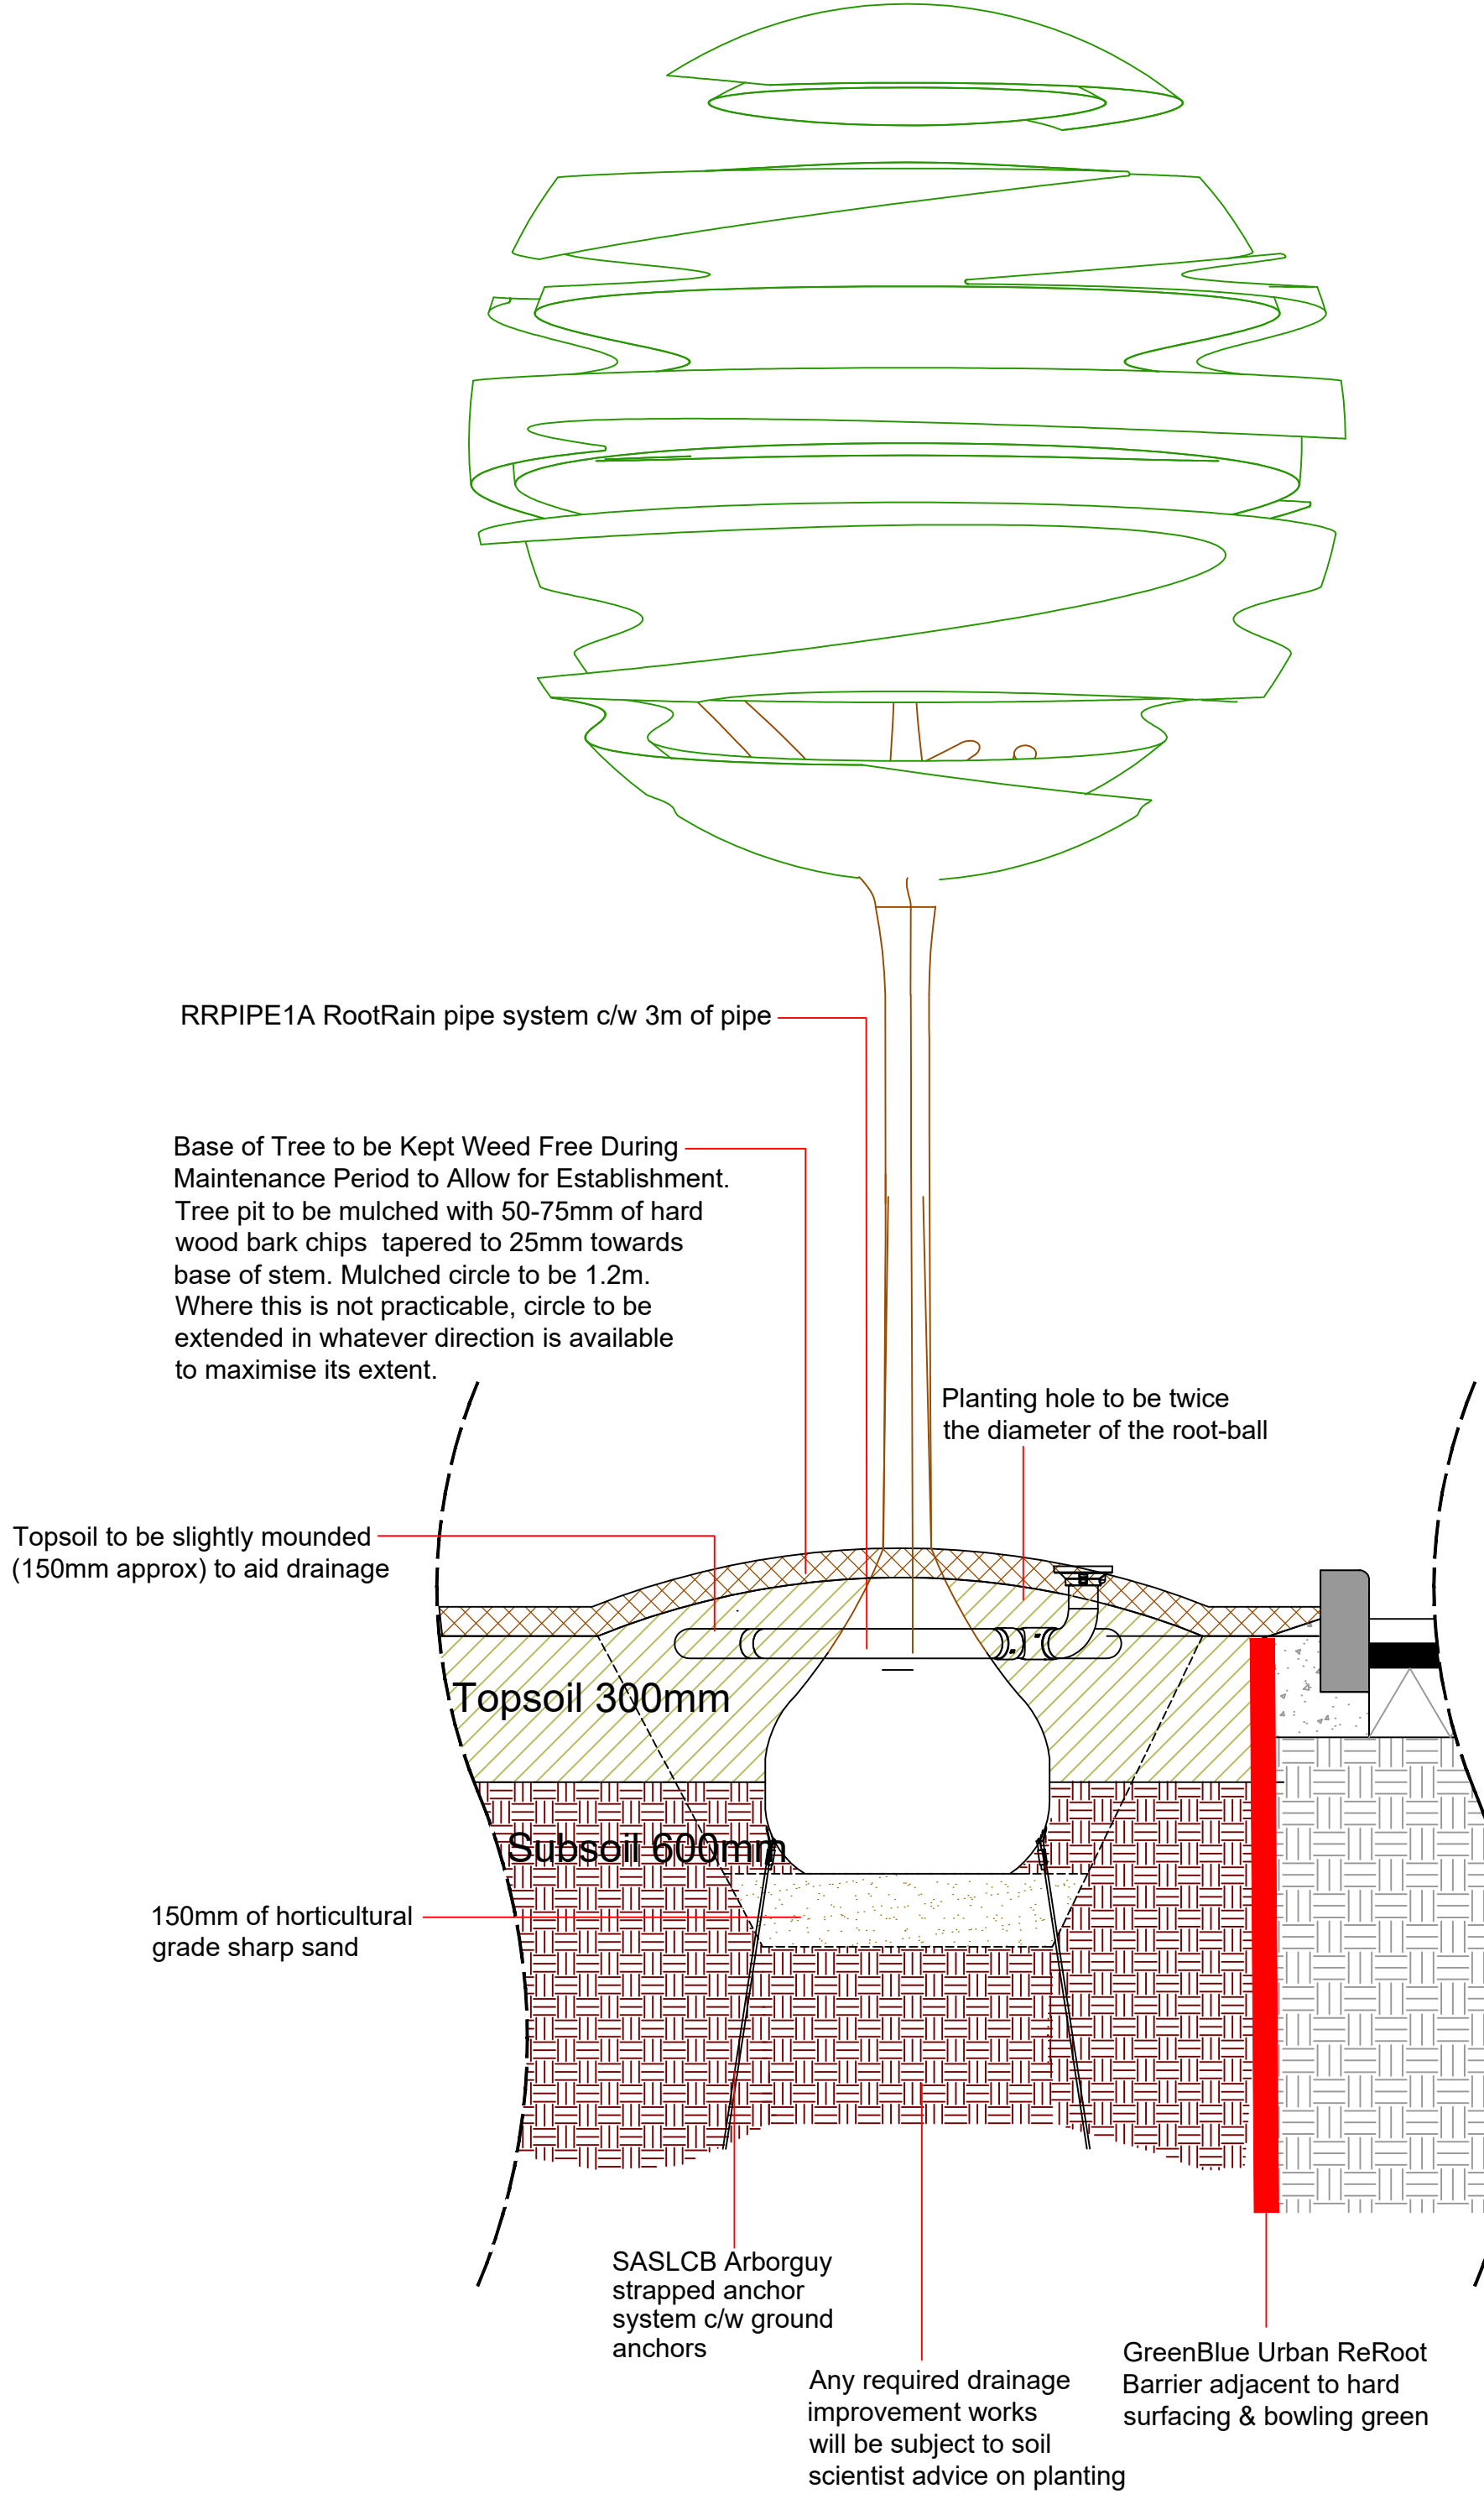

Tree Pit 1 Notes

No container/root-balled tree shall be supplied and planted until it has been found to be compliant with BS 8545:2014, Table 1, P.21


TOPSOIL:
Site won

SUBSOIL:
Site won

Areas around proposed trees to be securely fenced prior to commencement of construction operations on site to avoid compaction / contamination of soils.

Non-biodegradable & biodegradable root-ball wrappings to be removed. Where root-ball collapse is a concern, Wrapping to be cut & peeled back to one-third root-ball height. Peeled wrapping to be removed and not folded back into the root-ball.

Mulch circles around trees shall be maintained for at least 3 years post-planting.

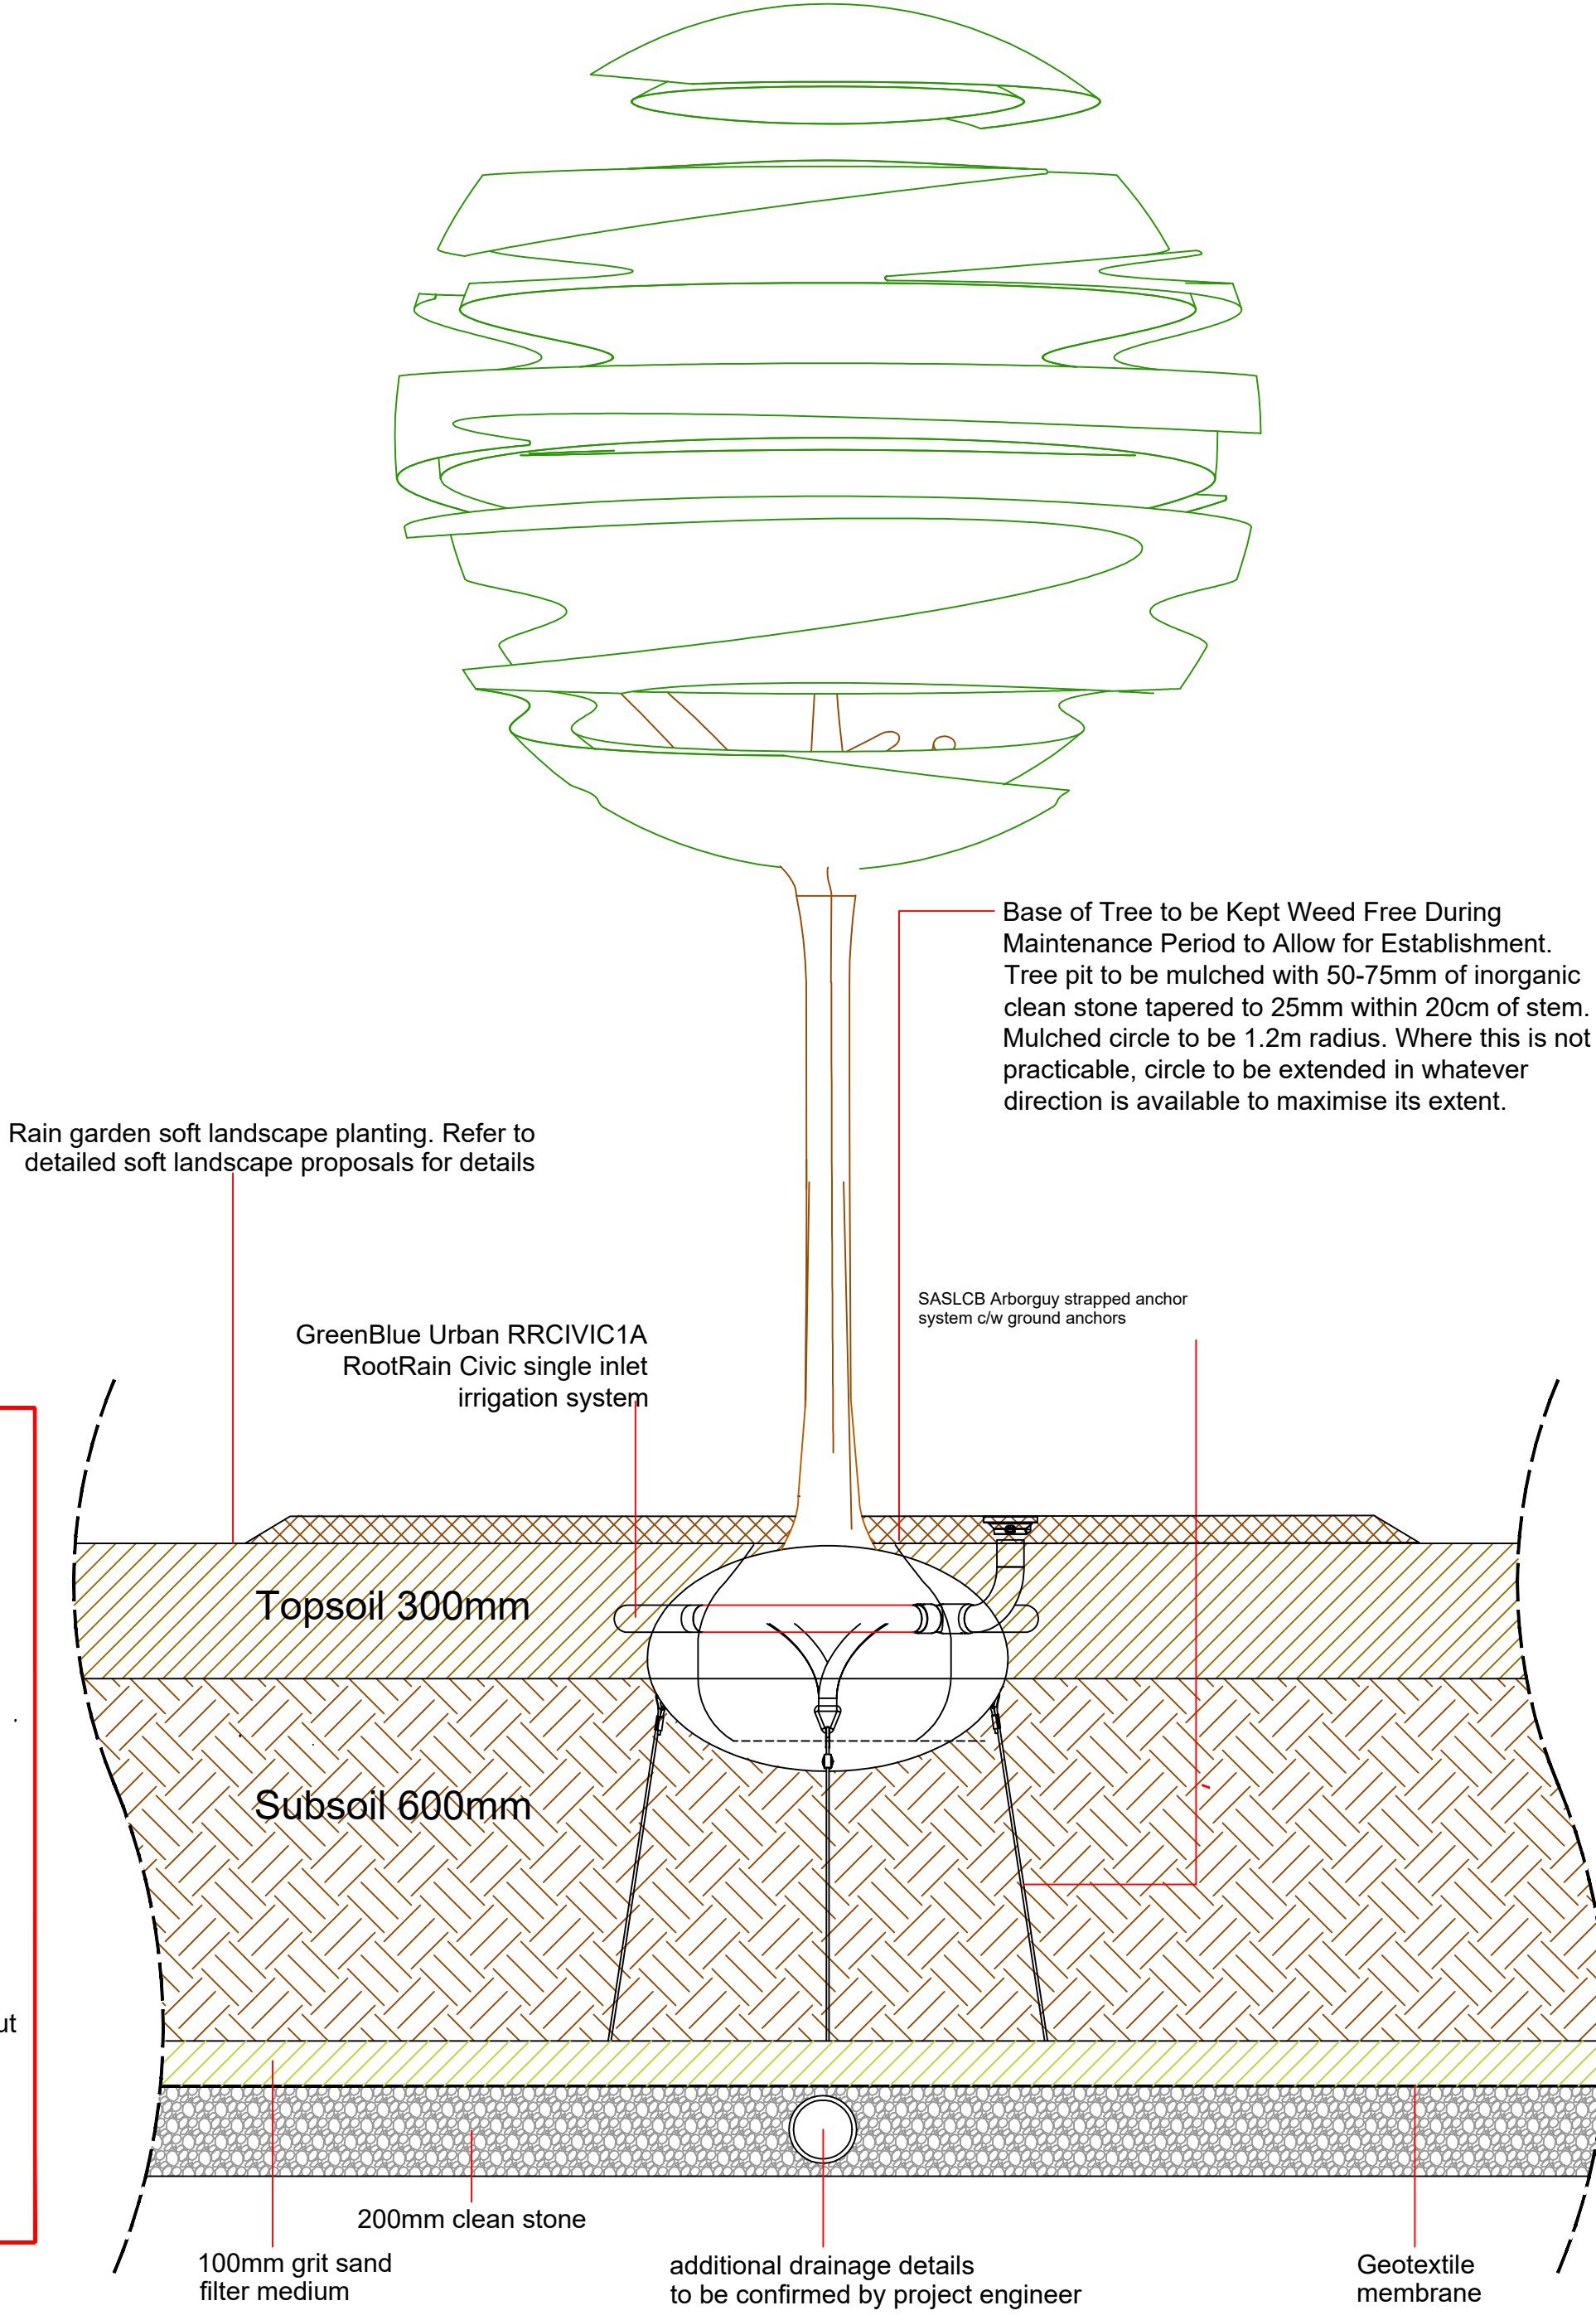

Tree Pit 2 Notes

No container/root-balled tree shall be supplied and planted until it has been found to be compliant with BS 8545:2014, Table 1, P.21

TOPSOIL:
Imported GreenBlue Urban ArborSoil Hydro (ARBORSOILHYDROA)

SUBSOIL:
Imported GreenBlue Urban ArborSoil Hydro (ARBORSOILSUBA)

Arborsoil Hydro to fill the extent of the rain garden

Backfilling to reinstate the pre-existing soil profile

Areas around proposed trees to be securely fenced prior to commencement of construction operations on site to avoid compaction / contamination of soils.

Non-biodegradable & biodegradable root-ball wrappings to be removed. Where root-ball collapse is a concern, Wrapping to be cut & peeled back to one-third root-ball height. Peeled wrapping to be removed and not folded back into the root-ball.

Mulch circles around trees shall be maintained for at least 3 years post-planting.

Refer to engineering drawings for further details of rain garden construction