


Date	01/08/2024	Date Req'd	12/09/2024
Quantity*	1	Ref	LBG369713
Descriptions	Neath Windsor Road 5 - Level 1		

Lining 820.0x2030.0x130.0	<u>Averta Halspan Prima - FD30s Doorset - Single Action - Acoustic 33dB</u>
	Averta Duo Touch Lining Q-Mark FSC- European Redwood (FSC) - 130mm x 32mm
	Stops: 45mm x 19mm
	Architrave: 45mm x 19mm European Redwood (FSC) - PR2E-3mm
	Strips: First: Halspan Fire Only Seal 15mm x 4mm - Black+ Halspan Triple Fin Smoke - Acoustic Seal - Black - Intumescent Fitted
	<u>Finish: Frame (and architraves if present) fully finished with Noble Grey : Satin</u>

Flush Door 750.0x1977.0x44.3 	Averta Halspan Verified Paint Grade Door Q-Mark FSC Q-Mark Plug - Yellow Outer / Silver Inner : CONFIG : LSASD		
	Door Core: Halspan Prima 44mm HDC core - FD30 (Q-Mark FEA/F97174) #B2		
	Facings: Inner: Kraft Paper (white primed) / Outer: Kraft Paper (white primed)		
	Concealed Lippings: 8mm - Steamed Beech (FSC) : Rounded Edges		
	Glass: Pyrobelite EW30-3(B)3 (7mm) - FR30/00 Bead: Sapele (FSC) : Q-Mark Ap Plug - Yellow/Orange 		
	<u>Finish: Doors fully finished with Dulux Brilliant White : Satin / Beads: Painted to match door colour</u>		

	No.	W	RCL	FCL	T	Material	S/L	Tenons
Push Kickplate	1	175	720	720	2	Kick plate 1.2mm SSS (Sq corners)		
Lipped Edges	No Edge Components					NA		
Bottom Door Gap / Undercut						18 ✓		
Spindle Height(s)	992.0				Spindle Width(s)			

Fittings List	
No.	Fitting
1	CONFIG : LSASD
3	IG01: Halspan Grade 13 Radius Corner Hinge - Brushed Stainless Steel (HIN-BSS-104-BSS) ✓
1	IG02: Astro ASDBSM Door bottom seal (37dB) surface mount - 830mm ✓
1	IG03: Halspan 30 - DIN Radius Forend Mortice Latch BSS - includes 1mm intumescent (forend and keep) - (BOM-LCK-119-BSS) ✓
1	IG10: Halspan Lever Handles Sprung Rose 20mm dia - 140mm x 20mm BSS Finish (LVR-200-BSS) ✓
2	IG21: Halspan Fire Door Keep Shut Signage - SSS (SGN-DKS-076-BSS) ✓
1	IG24: Halspan 9000 Series 2-5 Power Closer - Brushed Stainless Steel (CLR-PWR-100-BSS) ✓

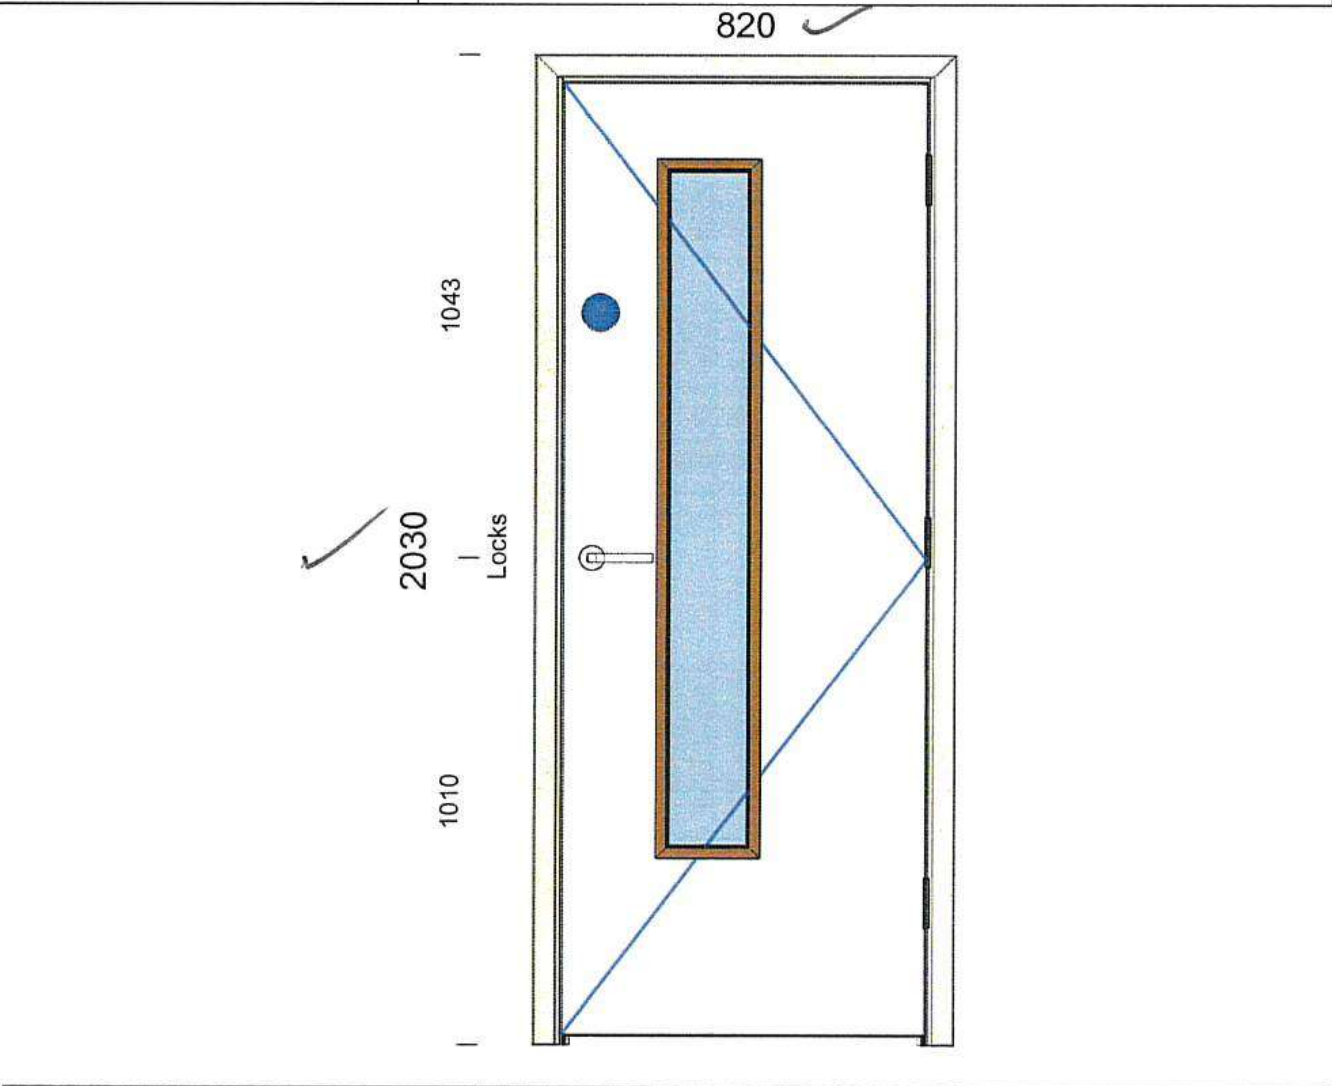

Opening Indicator	
 ✓	

Subitem	Glazing	No.	Dims
Flush Door 1	Pyrobelite EW30-3(B)3 (7mm) - FR30/00 ✓	1	190 x 1427

Glazing Tape	Colour	Length (m)
Lorient FF1 - Black (GS4407FF)	Black	6.5

Notes	
All dimensions are in mm. *All quantities are for a single item and are not multiplied by the quantity above.	


Date	01/08/2024	Date Req'd	12/09/2024
Quantity*	1	Ref	LBG369714
Descriptions	Neath Windsor Road 5 - Level 1		

Lining 810.0x2000.0x130.0	<u>Averta Halspan Prima - FD30s Doorset - Single Action - Acoustic 33dB</u> Averta Duo Touch Lining Q-Mark FSC- European Redwood (FSC) - 130mm x 32mm Stops: 45mm x 19mm Architrave: 45mm x 19mm European Redwood (FSC) - PR2E-3mm Strips: First: Halspan Fire Only Seal 15mm x 4mm - Black+ Halspan Triple Fin Smoke - Acoustic Seal - Black - Intumescent Fitted <u>Finish: Frame (and architraves if present) fully finished with Noble Grey : Satin</u>
---	--

Flush Door 740.0x1957.0x44.3	Averta Halspan Verified Paint Grade Door Q-Mark FSC Q-Mark Plug - Yellow Outer / Silver Inner : CONFIG : ULSASD Door Core: Halspan Prima 44mm HDC core - FD30 (Q-Mark FEA/F97174) #B2 Facings: Inner: Kraft Paper (white primed) / Outer: Kraft Paper (white primed) Concealed Lippings: 8mm - Steamed Beech (FSC) : Rounded Edges Glass: Pyrobelite EW30-3(B)3 (7mm) - FR30/00 Bead: Sapele (FSC) : Q-Mark Ap Plug - Yellow/Orange <u>Finish: Doors fully finished with Dulux Brilliant White : Satin / Beads: Painted to match door colour</u>							
	No.	W	RCL	FCL	T	Material	S/L	Tenons
Push Kickplate	1	175	710	710	2	Kick plate 1.2mm SSS (Sq corners)		
Lipped Edges	No Edge Components					NA		
Bottom Door Gap / Undercut					8			

Fittings List	
No.	Fitting
1	CONFIG : ULSASD
3	IG01: Halspan Grade 13 Radius Corner Hinge - Brushed Stainless Steel (HIN-BSS-104-BSS) ✓
1	IG02: Astro ASDBSM Door bottom seal (37dB) surface mount - 830mm ✓
1	IG14: Halspan Finger Plate 475mm - Brushed Stainless Steel (FGP-475-BSS) ✓
1	IG14: Halspan Pull Handle 425mm - Brushed Stainless Steel (PUL-425-BSS) ✓
2	IG21: Halspan Fire Door Keep Shut Signage - SSS (SGN-DKS-076-BSS) ✓
1	IG24: Halspan 9000 Series 2-5 Power Closer - Brushed Stainless Steel (CLR-PWR-100-BSS) ✓

01.08.24,

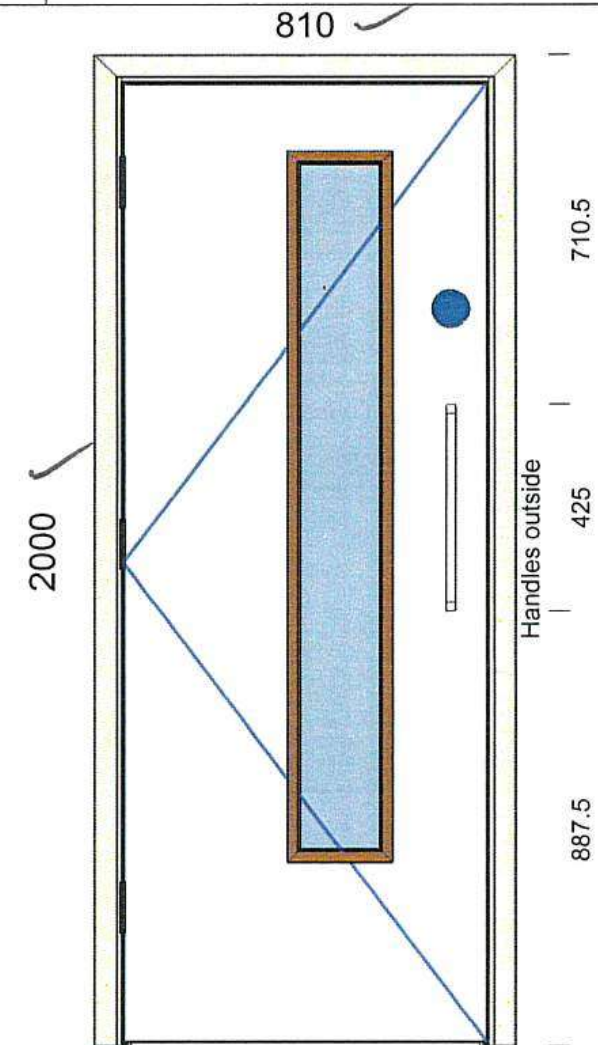

Opening Indicator	
	

Subitem	Glazing	No.	Dims
Flush Door 1	Pyrobelite EW30-3(B)3 (7mm) - FR30/00 ✓	1	190 x 1427

Glazing Tape	Colour	Length (m)
Lorient FF1 - Black (GS4407FF)	Black	6.5

Notes	
All dimensions are in mm. *All quantities are for a single item and are not multiplied by the quantity above.	

Page 2 of 6


Date	01/08/2024	Date Req'd	12/09/2024
Quantity*	1	Ref	LBG369717
Descriptions	Neath Windsor Road 5 - Level 2		


Lining 820.0x2030.0x130.0	Averta Halspan Prima - FD30s Doorset - Single Action - Acoustic 33dB ✓		
	Averta Duo Touch Lining Q-Mark FSC- European Redwood (FSC) - 130mm x 32mm Stops: 45mm x 19mm Architrave: 45mm x 19mm European Redwood (FSC) - PR2E-3mm ✓ Strips: First: Halspan Fire Only Seal 15mm x 4mm - Black+ Halspan Triple Fin Smoke - Acoustic Seal - Black - Intumescent Fitted Finish: Frame (and architraves if present) fully finished with Brave Ground : Satin ✓		

Flush Door 750.0x1977.0x44.3	Averta Halspan Verified Paint Grade Door Q-Mark FSC Q-Mark Plug - Yellow Outer / Silver Inner : CONFIG : LSASD Door Core: Halspan Prima 44mm HDC core - FD30 (Q-Mark FEA/F97174) #B2 Facings: Inner: Kraft Paper (white primed) / Outer: Kraft Paper (white primed) Concealed Lippings: 8mm - Steamed Beech (FSC) : Rounded Edges Glass: Pyrobelite EW30-3(B)3 (7mm) - FR30/00 Bead: Sapele (FSC) : Q-Mark Ap Plug - Yellow/Orange ✓ <u>Finish: Doors fully finished with Dulux Brilliant White : Satin / Beads: Painted to match door colour</u>						
	No.	W	RCL	FCL	T	Material	S/L

Push Kickplate	1	175	720	720	2	Kick plate 1.2mm SSS (Sq corners)		
Lipped Edges	No Edge Components					NA		
Bottom Door Gap / Undercut						18 ✓		
Spindle Height(s)	992.0			Spindle Width(s)				

Fittings List	
No.	Fitting
1	CONFIG : LSASD
3	IG01: Halspan Grade 13 Radius Corner Hinge - Brushed Stainless Steel (HIN-BSS-104-BSS) ✓
1	IG02: Astro ASDBSM Door bottom seal (37dB) surface mount - 830mm ✓
1	IG03: Halspan 30 - DIN Radiused Sash Lock BSS - includes 1mm intumescent (forend and keep) - (BOM-LCK-104-BSS) ✓
1	IG10: Halspan Lever Handles Sprung Rose 20mm dia - 140mm x 20mm BSS Finish (LVR-200-BSS) ✓
2	IG11: Halspan Euro profile escutcheon - 52mm diameter x 8mm SSS (ESC-528-BSS) ✓
1	IG12: Halspan Euro Cylinder/Turn 70mm (44mm door) - KTD (CYL-70-CT-KD-SC) ✓
2	IG21: Halspan Fire Door Keep Shut Signage - SSS (SGN-DKS-076-BSS) ✓
1	IG24: Halspan 9000 Series 2-5 Power Closer - Brushed Stainless Steel (CLR-PWR-100-BSS) ✓

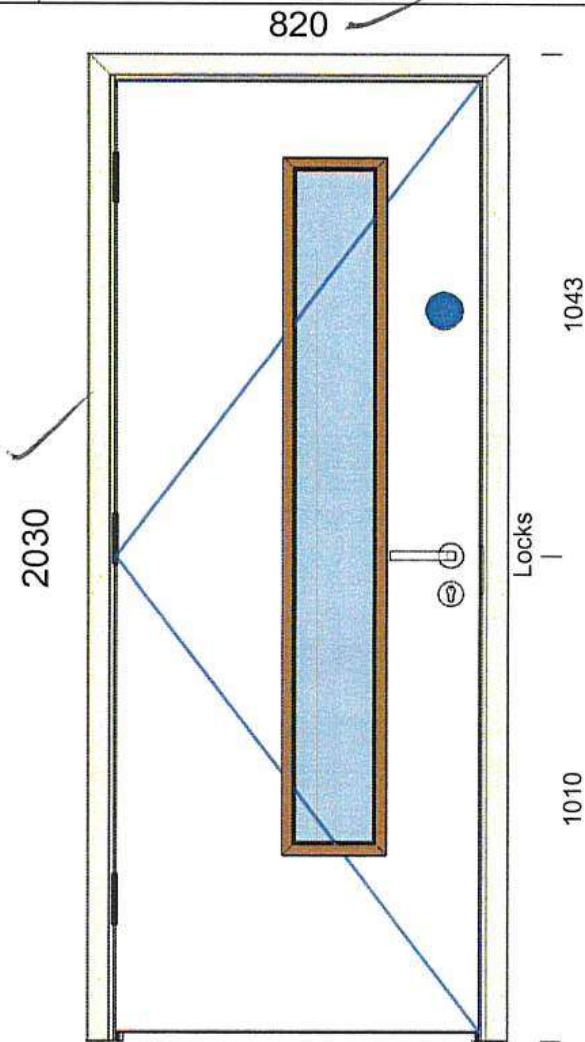

Opening Indicator	
	

Subitem	Glazing	No.	Dims
Flush Door 1	Pyrobelite EW30-3(B)3 (7mm) - FR30/00 ✓	1	190 x 1427

Glazing Tape	Colour	Length (m)
Lorient FF1 - Black (GS4407FF)	Black	6.5

Notes


 01.08.24.

Date	01/08/2024	Date Req'd	12/09/2024
Quantity*	1	Ref	LBG369720
Descriptions	Neath Windsor Road 5 - Level B		


Lining 870.0x2070.0x120.0	Averta Halspan Prima FD60S Doorset - Single Action - Acoustic 34dB		
	Averta Duo Touch Lining Q-Mark FSC- Sapele (FSC) - 120mm x 32mm Stops: 45mm x 19mm Extension lining: 120mm x 18mm European Redwood (FSC) Architrave: 68mm x 19mm European Redwood (FSC) - PR2E-3mm Strips: First: Halspan Fire Only Seal 15mm x 4mm - Black / Second: Halspan Fire Only Seal 15mm x 4mm - Black+ Halspan Triple Fin Smoke - Acoustic Seal - Black - Intumescent Fitted Finish: Frame (and architraves if present) fully finished with Noble Grey : Satin		

Flush Door 800.0x2027.0x53.5	Averta Halspan Verified Paint Grade Door Q-Mark FSC Q-Mark Plug - Blue Outer / Silver Inner : CONFIG : ULSASD Door Core: Halspan Prima 54mm HDC core - FD60 (Q-Mark FEA/F96103) #B2 Facings: Inner: Kraft Paper (white primed) / Outer: Kraft Paper (white primed) Concealed Lippings: 10mm - Sapele (FSC) : Rounded Edges Finish: Doors fully finished with Concrete Grey : Satin / Beads: Painted to match door colour							
	No.	W	RCL	FCL	T	Material	S/L	Tenons
Push Kickplate	1	175	770	770	2	Kick plate 1.2mm SSS (Sq corners)		
Lipped Edges	No Edge Components						NA	
Bottom Door Gap / Undercut							8	
Spindle Height(s)	820.0				Spindle Width(s)			

Fittings List	
No.	Fitting
1	CONFIG : ULSASD
3	IG01: Halspan 60 Grade 13 Radius Corner Hinge - complete with 1mm pad - Brushed Stainless Steel (BOM-HIN-201-BSS)
1	IG02: Astro ASDBSM Door bottom seal (37dB) surface mount - 830mm
1	IG03: Halspan 60 - DIN Radiused Dead Lock BSS - includes 1mm intumescent (forend, keep and lock body) - (BOM-LCK-108-BSS)
2	IG11: Halspan Euro profile escutcheon - 52mm diameter x 8mm SSS (ESC-528-BSS)
1	IG12: Halspan Euro Cylinder/Turn 80mm (54mm door) - KTD (CYL-80-CT-KD-SC)
1	IG14: Halspan Finger Plate 350mm - Brushed Stainless Steel (FGP-350-BSS)
1	IG14: Halspan Pull Handle 300mm - Brushed Stainless Steel (PUL-300-BSS)
2	IG21: Halspan Fire Door Keep Locked Signage - SSS (SGN-DKL-076-BSS)
1	IG24: Halspan 9000 Series 2-5 Power Closer - Brushed Stainless Steel (CLR-PWR-100-BSS)

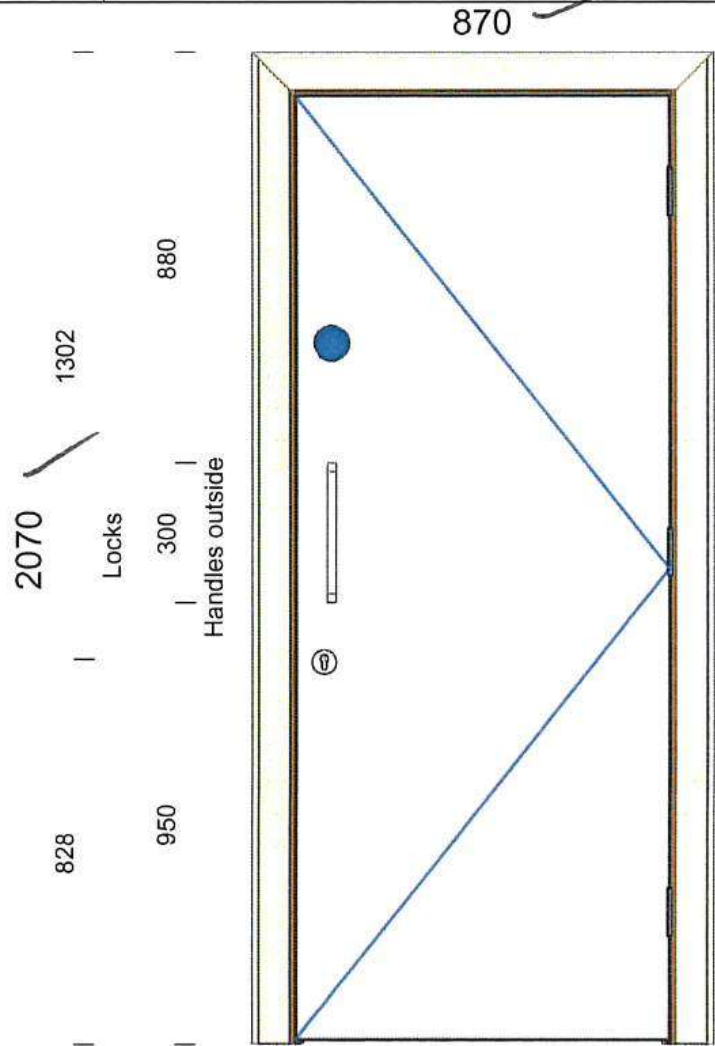

Opening Indicator



Notes

Richard Ray 01.08.24.


Date	01/08/2024	Date Req'd	12/09/2024
Quantity*	1	Ref	LBG369716
Descriptions	Neath Windsor Road 5 - Level 2		

Lining 850.0x2090.0x130.0	<u>Averta Halspan Prima - FD30s Doorset - Single Action - Acoustic 33dB</u>
	Averta Duo Touch Lining Q-Mark FSC- European Redwood (FSC) - 130mm x 32mm
	Stops: 45mm x 19mm
	Architrave: 45mm x 19mm European Redwood (FSC) - PR2E-3mm
	Strips: First: Halspan Fire Only Seal 15mm x 4mm - Black+ Halspan Triple Fin Smoke - Acoustic Seal - Black - Intumescent Fitted
	<u>Finish: Frame (and architraves if present) fully finished with Brave Ground : Satin</u>

Flush Door 780.0x2037.0x44.3	Averta Halspan Verified Paint Grade Door Q-Mark FSC Q-Mark Plug - Yellow Outer / Silver		
	Inner : CONFIG : LSASD		
	Door Core: Halspan Prima 44mm HDC core - FD30 (Q-Mark FEA/F97174) #B2		
	Facings: Inner: Kraft Paper (white primed) / Outer: Kraft Paper (white primed)		
	Concealed Lippings: 8mm - Steamed Beech (FSC) : Rounded Edges		
	<u>Finish: Doors fully finished with Dulux Brilliant White : Satin / Beads: Painted to match door colour</u>		

No.	W	RCL	FCL	T	Material	S/L	Tenons
1	175	750	750	2	Kick plate 1.2mm SSS (Sq corners)		
Lipped Edges				No Edge Components			
Bottom Door Gap / Undercut				18			
Spindle Height(s)		992.0		Spindle Width(s)			

Fittings List	
No.	Fitting
1	CONFIG : LSASD
3	IG01: Halspan Grade 13 Radius Corner Hinge - Brushed Stainless Steel (HIN-BSS-104-BSS)
1	IG02: Astro ASDBSM Door bottom seal (37dB) surface mount - 830mm
1	IG03: Halspan 30 - DIN Radiused Sash Lock BSS - includes 1mm intumescent (forend and keep) - (BOM-LCK-104-BSS)
1	IG10: Halspan Lever Handles Sprung Rose 20mm dia - 140mm x 20mm BSS Finish (LVR-200-BSS)
2	IG11: Halspan Euro profile escutcheon - 52mm diameter x 8mm SSS (ESC-528-BSS)
1	IG12: Halspan Euro Cylinder/Turn 70mm (44mm door) - KTD (CYL-70-CT-KD-SC)
2	IG21: Halspan Fire Door Keep Shut Signage - SSS (SGN-DKS-076-BSS)
1	IG24: Halspan 9000 Series 2-5 Power Closer - Brushed Stainless Steel (CLR-PWR-100-BSS)

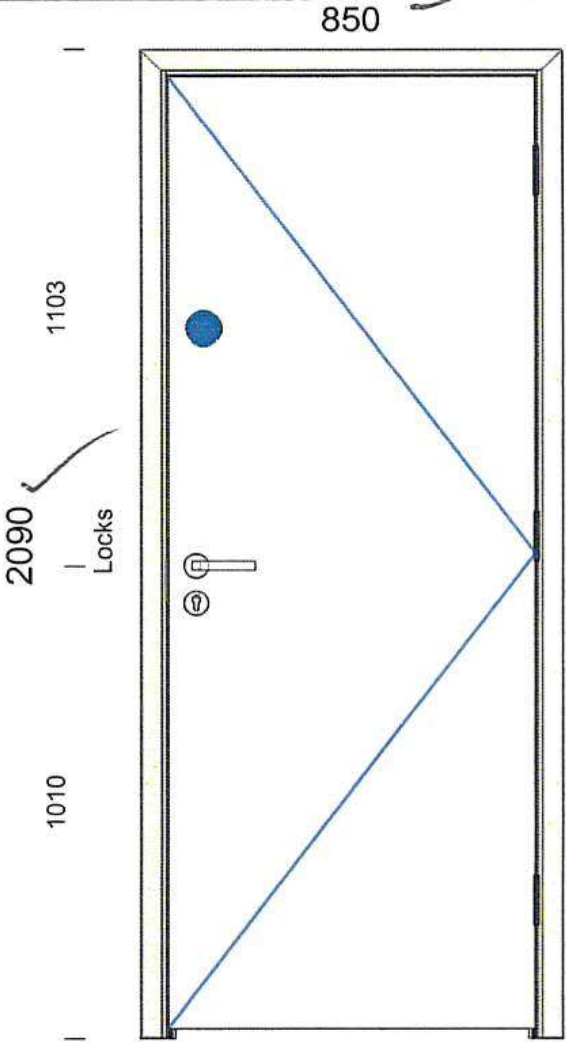

Opening Indicator

Notes


Richard Ray 01.08.24

Date	01/08/2024	Date Req'd	12/09/2024
Quantity*	1	Ref	LBG369719
Descriptions	Neath Windsor Road 5 - Level B		


Lining 850.0x2070.0x120.0	Averta Halspan Prima - FD30s Doorset - Single Action - Acoustic 33dB		
	Averta Duo Touch Lining Q-Mark FSC- European Redwood (FSC) - 120mm x 32mm Stops: 45mm x 19mm Extension lining: 120mm x 18mm European Redwood (FSC) Architrave: 68mm x 19mm European Redwood (FSC) - PR2E-3mm Strips: First: Halspan Fire Only Seal 15mm x 4mm - Black+ Halspan Triple Fin Smoke - Acoustic Seal - Black - Intumescent Fitted Finish: Frame (and architraves if present) fully finished with Noble Grey : Satin		

Flush Door 780.0x2017.0x44.3	Averta Halspan Verified Paint Grade Door Q-Mark FSC Q-Mark Plug - Yellow Outer / Silver Inner : CONFIG : LSASD							
	Door Core: Halspan Prima 44mm HDC core - FD30 (Q-Mark FEA/F97174) #B2 Facings: Inner: Kraft Paper (white primed) / Outer: Kraft Paper (white primed) Concealed Lippings: 8mm - Steamed Beech (FSC) : Rounded Edges Finish: Doors fully finished with Concrete Grey : Satin / Beads: Painted to match door colour							
	No.	W	RCL	FCL	T	Material	S/L	Tenons
Push Kickplate	1	175	750	750	2	Kick plate 1.2mm SSS (Sq corners)		
Lipped Edges	No Edge Components						NA	
Bottom Door Gap / Undercut							18	
Spindle Height(s)	992.0				Spindle Width(s)			

Fittings List	
No.	Fitting
1	CONFIG : LSASD
3	IG01: Halspan Grade 13 Radius Corner Hinge - Brushed Stainless Steel (HIN-BSS-104-BSS)
1	IG02: Astro ASDBSM Door bottom seal (37dB) surface mount - 830mm
1	IG03: Halspan 30 - DIN Radiused Sash Lock BSS - includes 1mm intumescent (forend and keep) - (BOM-LCK-104-BSS)
1	IG10: Halspan Lever Handles Sprung Rose 20mm dia - 140mm x 20mm BSS Finish (LVR-200-BSS)
2	IG11: Halspan Euro profile escutcheon - 52mm diameter x 8mm SSS (ESC-528-BSS)
1	IG12: Halspan Euro Cylinder/Turn 70mm (44mm door) - KTD (CYL-70-CT-KD-SC)
2	IG21: Halspan Fire Door Keep Shut Signage - SSS (SGN-DKS-076-BSS)
1	IG24: Halspan 9000 Series 2-5 Power Closer - Brushed Stainless Steel (CLR-PWR-100-BSS)

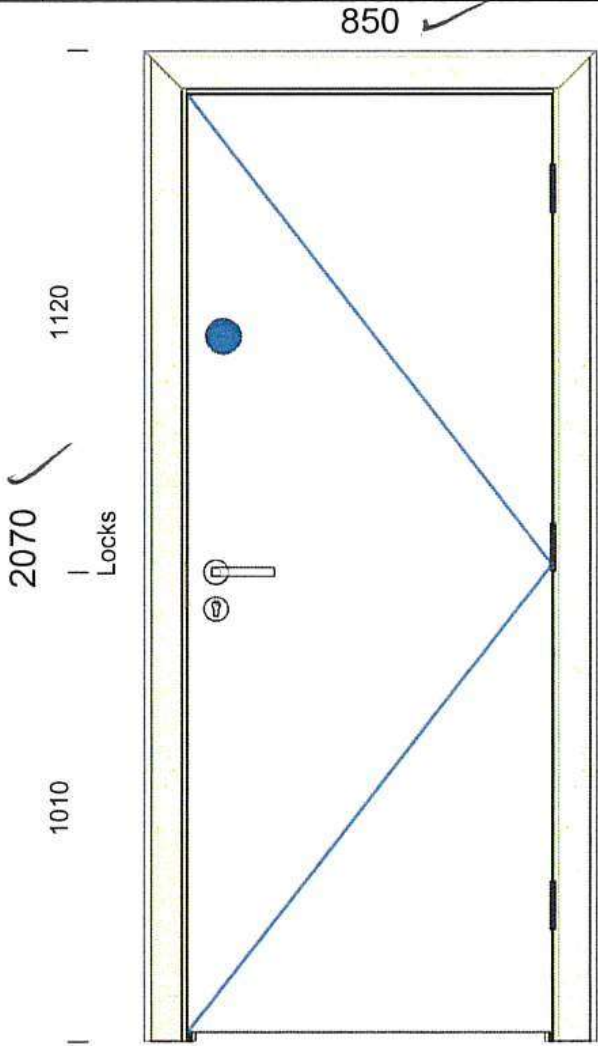

Opening Indicator



Notes

01.08.24