


AOYG24KATA

Please visit our webstore for full product and technical documentation 

Nominal Cooling Capacity	(kW)	6.8
Nominal Heating Capacity	(kW)	7.5
Height	(mm)	632
Width	(mm)	799
Depth	(mm)	290
Weight	(kg)	38
Airflow Rate - Cooling - High	(m3/h)	2885
Airflow Rate - Heating - High	(m3/h)	2350
Sound Pressure Level - Cooling - High	(dB(A))	54
Sound Pressure Level - Heating - High	(dB(A))	55
Sound Power Level - Cooling - High	(dB(A))	66
Sound Power Level - Heating - High	(dB(A))	67
Refrigerant Type (Global Warming Potential)		R32 (675)
Liquid Pipe Size		1/4"
Gas Pipe Size		1/2"
Min - Max Pipe Length	(m)	3 - 25
Max Height Difference	(m)	20
Refrigerant Charge (kg)	(kg)	1.25
Refrigerant CO2eq-T		0.844
Precharged For	(m)	20
Additional Charge (g/m)	(g/m)	20
Unit Power Supply		1Ph-230V-50Hz
Suggested Fuse Size	(A)	16
Cooling Mode Minimum Ambient	(°C)	-10
Cooling Mode Maximum Ambient	(°C)	46
Heating Mode Minimum Ambient	(°C)	-15
Heating Mode Maximum Ambient	(°C)	24

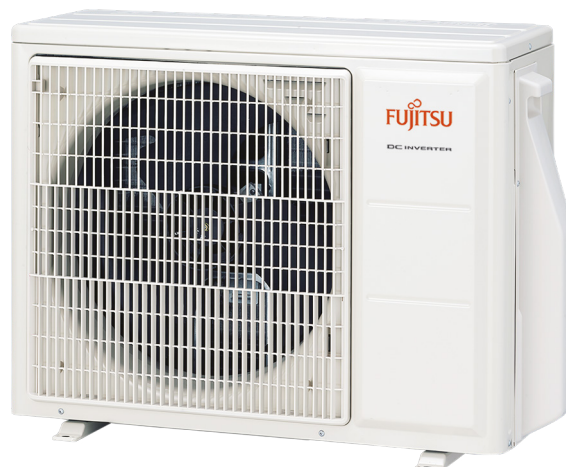

Document Downloads

[Accessories](#)

[Airflow](#)

[Capacity Correction](#)

[Charging Details](#)

[Dimensional Drawing](#)

[Electrical Characteristics](#)

[Installation Manual](#)

[Noise Curve](#)

[Product Image](#)

[Refrigerant Circuit](#)

[Spare Parts List All Pages](#)

[Specifications](#)

[Wiring Diagram](#)

Related Items

[AUXG24KVL](#)

6.8kW Compact Cassette Indoor Unit - R32

[AUXG24KRLB](#)


6.8kW Circular Flow Cassette Indoor Unit - R32

[ARXG24KMLA](#)


6.8kW Medium Static Ducted Indoor Unit - R32

[ABYG24KRTA](#)

6.8kW Ceiling Suspended Indoor Unit - R32

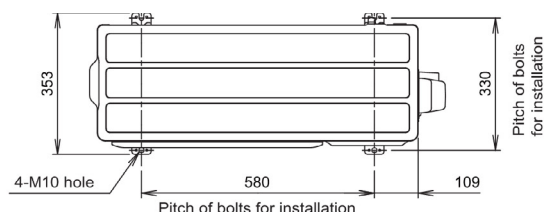

Top view

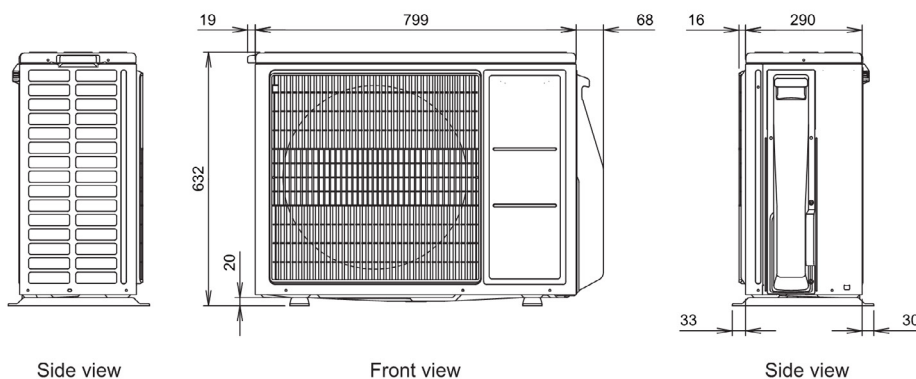

Units: mm

•Specifications and design are subject to change without notice for further improvement.
•Actual products' colors may be different from the colors shown in this printed material.