



Tree Condition Survey and Report carried out by:

ArbTS - Arboricultural Technician Services Ltd

(Tree Consultancy Services)

Stephen Lucocq *BSc (Hons), Tech Cert (Arbor.A), M.Arbor.A*

Professional Member of the Arboricultural Association

Web site: www.ArbTS.co.uk

Email: info@ArbTS.co.uk

Phone: (01639) 731 139

Mobile: 07789 551 591

Tree Condition Survey and Management Work Recommendations

Date – 3rd September 2021

Site – Y Gorlan, Coed Parc,
Cwmavon, Port Talbot, SA12 9BN

Project Reference – ArbTS_1192.1_YGorlan

Contents

1.0	Introduction
2.0	The Tree Condition Survey
3.0	Tree Inspection Scope
4.0	The Trees
	4.1 Tree Data
	4.2 Tree Management Work Recommendations
	4.3 Tree Location Plan
	4.4 Legal Constraints
5.0	Recommendations
6.0	Qualifications and Further Information
7.0	Bibliography & Web Information
8.0	Appendices
	Appendix 1 Tree Survey Key
	Appendix 2 Tree Data
	Appendix 3 Tree Location Plan
	Appendix 4 Tree Photographs

Copyright © 2021

ArbTS Ltd, 5 Weavers Road, Ystradgynlais, Powys, SA9 1PQ. All rights reserved.

No part of this report may be copied or reproduced by any means without prior written permission from ArbTS.

If you have received this report in error, please destroy all copies in your possession or control.

This report has been prepared for the exclusive use of the commissioning party and unless otherwise agreed in writing by ArbTS, no other party may use, make use of or rely on the contents of this report.

No liability is accepted by ArbTS for any use of this report, other than for the purposes for which it was originally prepared and provided.

Opinions and information provided in the report are on the basis of ArbTS using due skill, care and diligence in the preparation of the same and no warranty is provided as to their accuracy.

Surveys are undertaken on the understanding that nothing in the final report will be omitted, amended or misrepresented by the client or any other interested party.

This report and its contents remain the property of ArbTS until payment has been made in full.

It should be noted and it is expressly stated that no independent verification of any of the documents or information supplied to ArbTS has been made.

1.0 Introduction

- 1.1 The purpose of this report is to give a tree condition assessment of the trees located within Y Gorlan, Coed Parc, Cwmavon, Port Talbot, SA12 9BN.
- 1.2 The findings of this report provide management work recommendations with the order of work priority given to primarily address any hazardous trees but also include arboricultural and conservation related recommended tree works.
- 1.3 The following management work recommendations have been identified as found in Appendix 2 Tree Data. Urgent & Urgent to High work priority are colour coded in red (suggested to be carried out as soon as practicable i.e. 7 days to 1 month) and High & High to Medium work priority are colour coded in yellow (suggested to be carried out within 3 to 6 months).
- 1.4 All tree work should be carried out in accordance with the *British Standard BS3998: 2010 Tree Work – Recommendations*.

2.0 The Tree Condition Survey

- 2.1 The tree condition survey was conducted by Stephen Lucocq BSc (Hons), M.Arbor.A. on 25th August 2021.
- 2.2 All tree inspections were conducted from ground level with the use of an acoustic sounding hammer and probe. No invasive decay detective instruments were used.
- 2.3 All tree inspections were carried out in accordance with current best practise (Visual Tree Assessment) to give a systematic, consistent and transparent evaluation method to tree inspecting.
- 2.4 **Limitations of the Tree Condition Survey/Scope of works:** *Whilst every effort is made to ensure an accurate assessment of the trees condition is made during survey no responsibility can be taken for resultant damage or injury occurred by a failing tree. The survey only gives a snap shot of what is visible, not obscured or accessible on the day of survey. Please note that the findings of this report are only valid for 12 months from the date of the tree inspection. This report does not constitute to a full tree safety policy for the site.*

3.0 Tree Inspection Scope

- 3.1 The main scope of this tree inspection is to identify hazardous trees in a poor physiological or structural condition and the required work management recommendations to reduce the risk of these hazards to an acceptable level.
- 3.2 The areas around main paths, features, car parks etc. were identified as a priority for the tree inspection.
- 3.3 Where required areas of trees may be grouped as a whole. Any trees of note in these identified groups will be individually identified and included in the tree survey.
- 3.4 The level of detail of the tree inspection may vary depending on the target occupation and the size of the tree or groups of trees. For example large trees in high target occupation areas may be inspected in much greater detail than small trees in low target occupation areas.

4.0 The Trees

4.1 **Tree Data** - All data regarding the trees inspected for this report can be found in Appendix 2 Tree Data.

4.2 **Tree Management Work Recommendations**

Within Appendix 2 the Tree Management Work Recommendations are colour coded for work priority. Urgent & Urgent to High work priority are colour coded in red (suggested to be carried out as soon as practicable i.e. 7 days to 1 month) and High & High to Medium work priority are colour coded in yellow (suggested to be carried out within 3 to 6 months). Other works can be identified from this list to achieve desired management objectives and timescale given for the completion of this work. **Please note** that all work must be carried out to the *British Standard 3998:2010 Tree Works Recommendation*.

4.3 **Tree Location Plan** - A Tree Location Plan can be found in Appendix 3. Trees that require priority hazard work will be circled in colour. Urgent to Urgent/High priority work will be circled in red and High to High/Medium priority work circled in orange.

4.4 **Legal Constraints**

- **TPO (Tree Preservation Orders)/Conservation Areas** – The Tree Preservation Officer from the Local Planning Authority should be consulted before any work is carried out on site.
- **Protected Wildlife** – Before any tree work is carried out on site the trees should be inspected and written records taken of the activity of any protected species on site. This is to prevent the damage to any wildlife. Under the Wildlife and Countryside Act 1981 it is an offence to destroy or disturb nesting birds, if nesting birds are discovered or suspected no works can proceed and the Local Planning Authority (LPA) and Local Wildlife Trust must be notified for advice as to how to proceed. Further to this wildlife such as Bats are protected under European legislation (Countryside and Rights of Way Act 2000 and The Habitat Regulation 2009) it is an offence to recklessly, or intentionally, kill, injure or capture bats, to disturb them, or destroy, obstruct or damage any bat roosts found. If any bat activity is found then the bat conservation trust should be contacted as soon as possible (<http://www.bats.org.uk/> or 0845 1300 228). Further guidance relating to the protection of wildlife within development design is given in Welsh Assembly Government Technical Advice Note 5: Nature Conservation and Planning (2009).
- **Tree Felling Licence** – Depend on the designation of the land where the trees are located a Tree Felling Licence may be required if more than 5 cubic metres of timber are being extracted per one quarter a felling license must be obtained from Natural Resources Wales. <https://naturalresources.wales/permits-and-permissions/tree-felling-and-other-regulations/tree-felling-licences/?lang=en>

5.0 Recommendations

5.1 The detailed Tree Management Work Recommendations as found in Appendix 2 should be conducted as the priority states. High & High to Medium work priority to be carried out within 3 to 6 months. Other lower priority works can be identified by the managers of the site to achieve their desired objectives.

6.0 Further Information and Qualifications

Stephen Lucocq has been involved in Arboriculture within South Wales for over twenty years. He has worked as an Arborist for many of these years and has a good working knowledge of the practical side of the profession. He has always taken an active interest in all areas of Arboriculture and kept up to date with current research and developments.

Qualifications

- First Class BSc (Hons) Degree
- Arboricultural Association Technicians Certificate (Merit)
- PTI - Professional Tree Inspection (Lantra Awards)
- 2D Computer Aided Design (City and Guilds - Level 3)
- Quantified Tree Risk Assessment (QTRA) – Mike Ellison
- Visual Tree Assessment (VTA) – Mike Ellison
- Arboriculture and Bats (Lantra)
- Industrial Rope Access Trade Association (IRATA)
- Practical Arboriculture Qualifications (NPTC)

Membership

- Arboricultural Association Professional Member (M.Arbor.A)

7.0 Web Information & Bibliography

Web Information

- Arboricultural Association
<http://www.trees.org.uk/index.php>

Bibliography

- British Standards 3998 (2010) *Tree Work - Recommendations UK*; British Standards Institution
- British Standards 5837 (2012) *Trees in relation to design, demolition and construction. Recommendations*; British Standards Institution
- Lonsdale, D (1999) *Principle of Tree Hazard Assessment and Management* Edinburgh; Forestry Commission
- Mattheck, C (2007) *Field Guide for Visual Tree Assessment* Germany; Karlsruhe Research Centre
- Shigo, A.L (1991) *Modern Arboriculture* USA; Shigo and Trees, Association
- Sterry, P (2007) *Collins Complete British Trees* London; Collins
- Strouts, R.G (2000) *Diagnosis of ill-health in trees* Edinburgh; Forestry Commission
- Weber, K & Mattheck, C (2003) *Manual of wood decay* UK; Arboricultural Association

8.0 Appendices

Appendix 1 Tree Survey Key

- **Type** - **T** – Individual Tree, **G** – Group of tree (Used were a group of similar trees of similar condition are identified), **R** – Row of trees, **H** – Hedgerow, **S** - Stump, **W** – Woodland
- **ID #** - Identifies the tree, group, row, hedgerow or woodland with a unique identification number. For individual tree metal identification tags are located at 1.5 metres above ground level on their trunk.
- **Tree Name** - Scientific tree name and common tree name in brackets.
- **Age** -
 - **Y** - Young – First 10 years of growth
 - **SM** - Semi Mature - Less than 1/5 of life completed
 - **EM** – Early Mature – Less than 2/5 of life completed
 - **M** - Mature – 2/5 – 5/5 of life completed
 - **OM** - Over Mature - more than 5/5 of life completed and declining
 - **V** - Veteran – Veteran trees have no precise definition but are trees considered to be of biological aesthetic or ecological value because of their age
- **Size** – A general indication of the size of the tree/s in terms of height and width.
 - **S** – Small
 - **M** – Medium
 - **L** – Large
 - **VL** – Very Large
- **Physiological Condition** - The physiological condition of the tree/s. -
 - **G** - Good
 - **F** - Fair
 - **P** - Poor
 - **D** - Dead
- **Structural Condition** - The structural condition of the tree/s -
 - **G** - Good
 - **F** - Fair
 - **P** - Poor
 - **VP** – Very poor
- **Comments** – Observations and comments
- **Management Work Recommendations** – Required tree surgery operations including further investigation of suspected defects that require more detailed assessment
- **Target Occupation** – An approximate site specific guide from High to Low as assessed on the day of the tree inspection of the risk relating to the potential for damage to a person, property or item, within an area around the tree if failure of the tree or part of the tree were to occur. It is recommended that the re-inspection of tree or groups of trees should be carried out as follows:
 - **High** – Re-inspect in 12 months or less if stated
 - **H/Medium** – Re-inspect in 24 months or as stated
 - **Medium** – Re-inspect in 30 months or as stated

- **M/Low** – Re-inspect in 3 years or as stated
- **Low** - Re-inspect in 5 years or as stated

Further to this the level of detail of the tree inspection will vary depending on the target occupation and the size of the tree or groups of trees. For example large trees in high target occupation areas will be inspected in much greater detail than small trees in low target occupation areas.

(*Please note that this report is a tree condition survey with management recommendations and does not equate to a full tree safety policy for the site*)

- **Work Type** – Type of management work recommendation.
 - **Hazard** – Hazard Management - A risk to person or property from a tree with a defect or in poor condition
 - **Arb** – Arboricultural Management
 - **Landscape** – Landscape design/Management
 - **Conservation** – Wildlife/Habitat/Historic Management.
 - **Woodland** – Woodland Management
- **Work Priority** – A priority rating for management work recommendations. This is determined from an assessment on the day taking into account the target occupation around the tree, the size/part of the tree affected by the defect, the probability and foreseeable nature of the defect failing, the quality and value of the tree and other arboricultural factors. A suggested timescale for the work to be carried out is provided below:
 - **Urgent** - Work to be carried out as soon as practically possible. I.e. less than 7 days
 - **U/High** – Work to be carried out within 1 month
 - **High** – Work to be carried out within 3 months
 - **H/Medium** - Work to be carried within 6 months
 - **Medium** – Work to be carried out in 12/18 months
 - **M/Low** - Work to be carried out in 18/24 months if budget allows
 - **Low** - After consideration of management objectives

8.0 Appendices

Appendix 2 Tree Data

Tree ID #	Tree Species	Age	Size	Physiological Condition	Structural Condition	Comments	Management Work Recommendations	Target Occupation	Work Type	Work Priority
G1	Acer pseudoplatanus (Sycamore), Ilex aquifolium (Holly), Ulmus glabra (Wych Elm), Fraxinus excelsior (Ash)	M	M/L	G/Fair	G/Fair	group of trees located on bank down to highway, all trees in this area inspected for major defects, trees of note individually included in group area, larger trees mainly consisting of sycamore some covered in thick ivy with epicormic growth around the base limiting the tree inspection of these trees, two larger wych elm forming a whole noted close to boundary wall to road	remove deadwood over 40mm in diameter with the potential to fall into the road and any significant rubbing or crossing branches, fell declining / dead ash coppice stump (possibly outside of site boundary) at south western end of group	H/Medium	Hazard	H/Medium
G2	Acer pseudoplatanus (Sycamore), Fraxinus excelsior (Ash)	M	M/L	Fair	N/A	located in adjacent garden and some branches overhang garden area, trees not inspected in great depth as located in adjacent garden, one large ash tree over hanging the garden showing significant signs of ash dieback disease	consult with neighbour regarding condition of ash trees and recommendations to fell	Medium	Hazard	H/Medium
T1	Prunus avium (Wild Cherry)	M	M	Fair	F/Poor	offsite cherry tree with area of canker on stem, some surrounding reactive growth noted		M/Low		
T397	Fraxinus excelsior (Ash)	M	M/L	F/Poor	Fair	large ash with 50 percent canopy cover, directional weight towards the road	due to condition and proximity of the tree to the road recommended to be sectional felled whilst tree still alive	H/Medium	Hazard	H/Medium
T966	Acer pseudoplatanus (Sycamore)	M	M/L	Fair	N/A	twin stem upright in form compression against each other, unable to access as behind boundary fencing, appears to be an offsite tree, some bark flake noted on trunk, small deadwood in crown over garden area, slightly sparse leaf cover	remove deadwood over 25mm diameter over garden area	Medium	Hazard	H/Medium
T968	Fraxinus excelsior (Ash)	SM	M	F/Poor	F/Poor	tree grown with heavy lean to east due to phototropism, signs of ash dieback disease	sectional fell	H/Medium	Hazard	H/Medium
T969	Prunus avium (Wild Cherry)	SM	S	G/Fair	Fair	suppressed in form from larger adjacent trees		M/Low		
T970	Prunus avium (Wild Cherry)	SM	S	G/Fair	Fair	suppressed in form from larger adjacent trees, plastic pot noted around base		M/Low		

8.0 Appendices

Appendix 3 Tree Location Plan




Tree Location Plan

Site - Y Gorlan, Cwmavon

Project Ref - 1192.1

Scale - 1:300 @ A3


Tree Key

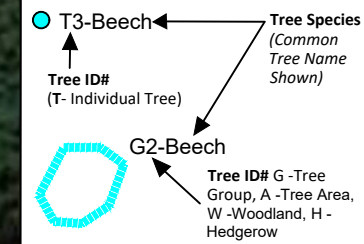

Tree Work Priority

- Urgent (Within 7 days) or Urgent/High (Within 31 days) Work Priority
- High (Within 3 Months) or High/Medium (Within 6 Months) Work Priority

(*Please see Appendix 2 - Tree data for all tree survey details including all management recommendations*)

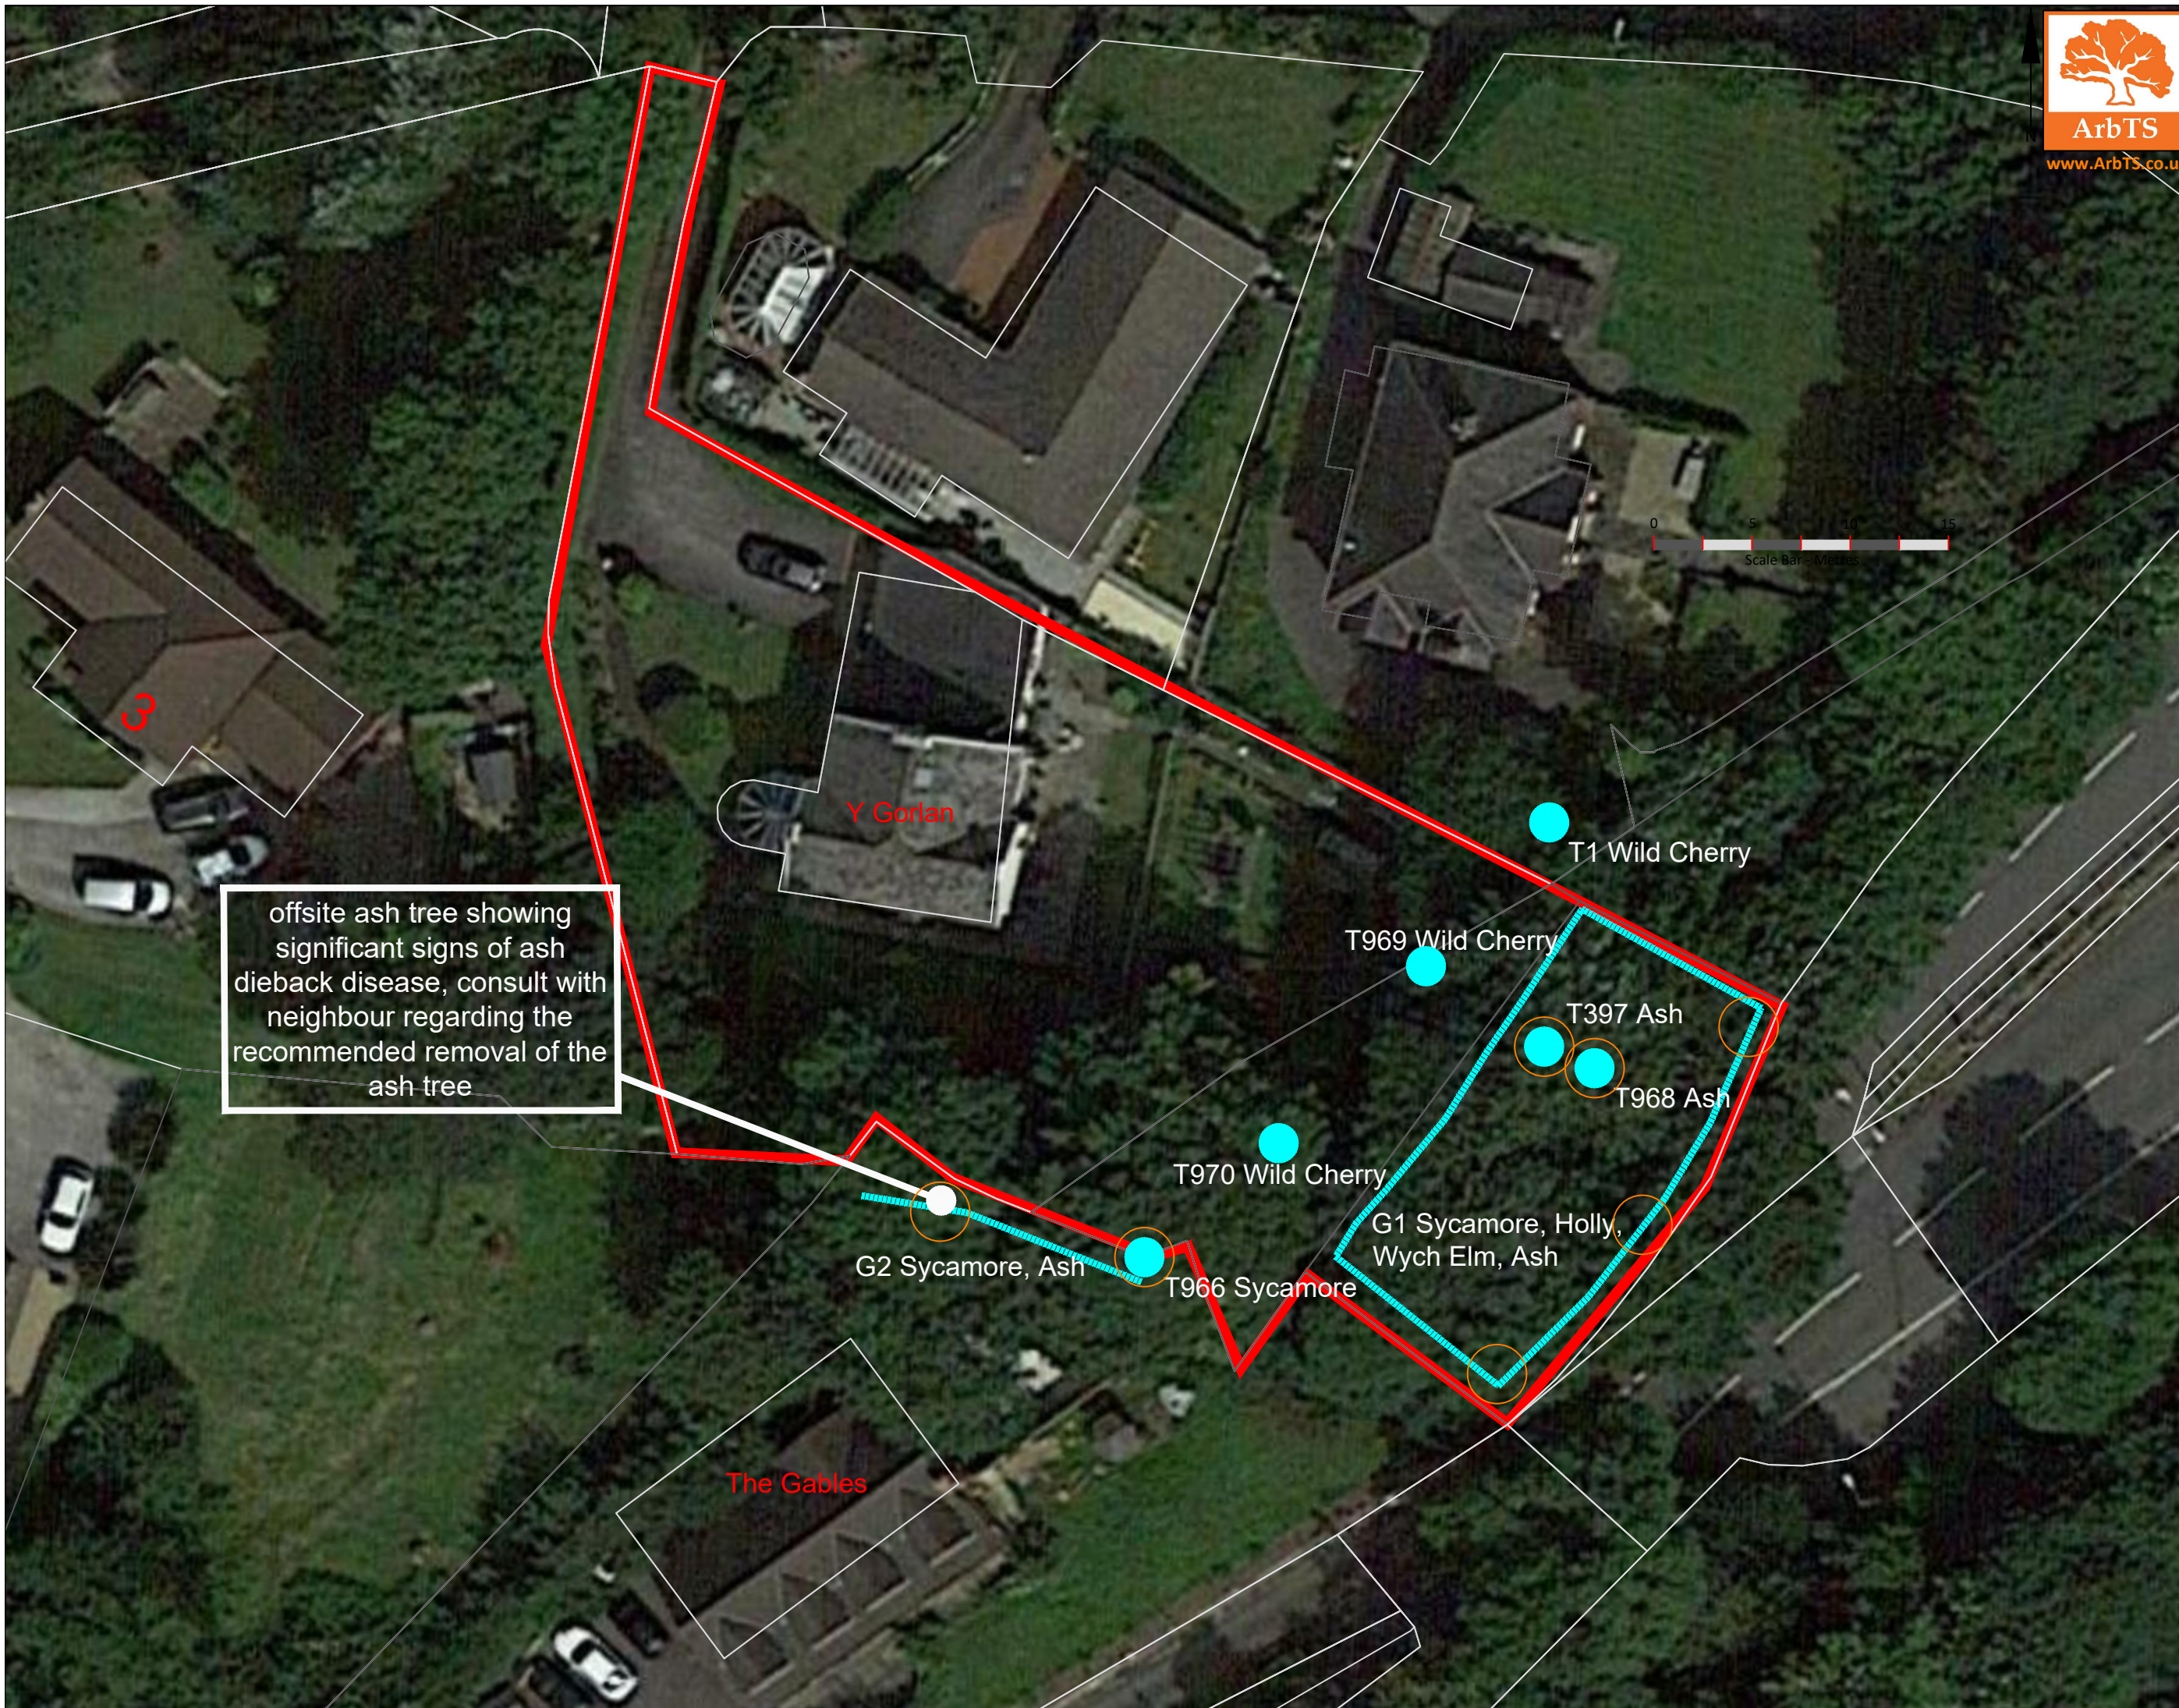

8.0 Appendices

Appendix 4 Tree Photographs

Tree ID#G2 - Off site Ash in group



Tree ID#G1



Tree ID#T1



Tree ID#G1



Tree ID# G1



Tree ID#G1 – small declining ash coppice

