

Sheldon Cycle Shelter

SCS315

Options

FIXING OPTIONS

Below Ground Base Fix (B) Surface Mount (C)

MATERIALS

Treated Redwood Class 3 (TRC3) | Treated Redwood Class 4 (TRC4) | Hardwood Iroko (HI)

ROOFING OPTIONS

16mm Multi-wall Polycarbonate | R32 Steel Plastisol | R32 Stucco Aluminium

METAL FINISHES

Galvanised (GL) | Galvanised & Powder Coated (GPC)

NOTES

- Site Engineer to determine suitable fixing method.
- Fixing bolts by others - 14 mm dia. holes (use M12 bolts).
- Size of concrete foundation and concrete mix to be determined on site, taking ground conditions into account
- All standard sized units come with full wind and snow calculations.
- This unit will have mesh behind the timber cladding
- Guttering & downpipes are available upon request.
- All products are made to order.

LENGTH: TBC

WIDTH: TBC

HEIGHT: TBC


WEIGHT: TBC



This product is site specific and can be designed to meet the individual requirements of any project.

The image shown is an illustration of the type of structure we offer.

Contact the sales department for more details.

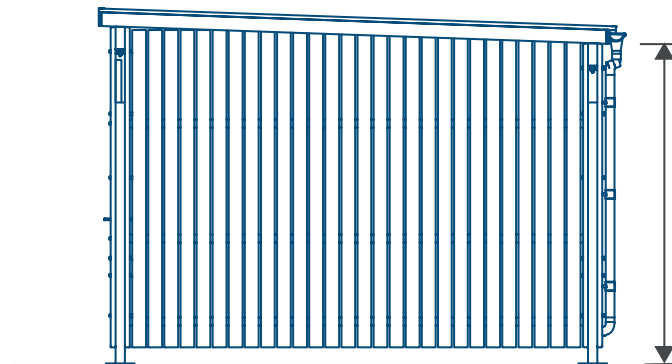

FIXING OPTIONS

