




Quick Reference Guide

AMNIS Flood Adjustable Back Spill Shield

This guide demonstrates how to install the side spill shield to the AMNIS Flood.

This guide is for reference only and all equipment should be installed by a suitably qualified and experienced person in lines with CDM.

AMNIS Flood

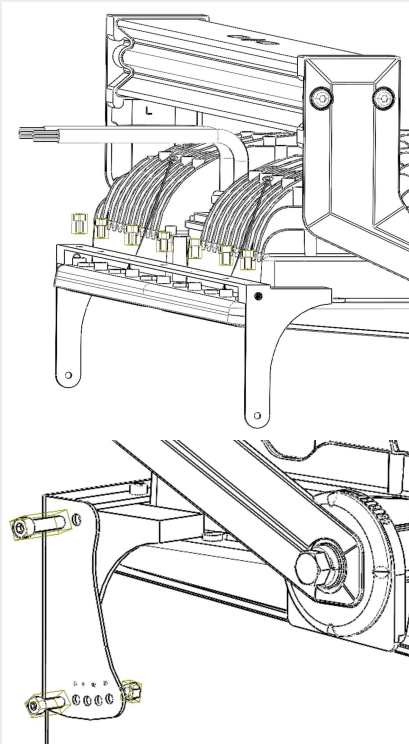

1. Unscrew x7 M5 fixings, Fit the spill shield holder over the holes and refasten the x7 M5 screws
2. Fit spill shield over the sides of the holder and fasten x2 M6 screws and washers through the top center hole into the tapped hole of the holder.
3. Adjust tilt of shield relevant to the elevation tilt of the fitting, to ensure the shield perpendicular to ground. Secure with M5 fixings (washers and nylon nut)

Tighten all to <10Nm.

Apply Loctite if installation location has extreme winds.

