


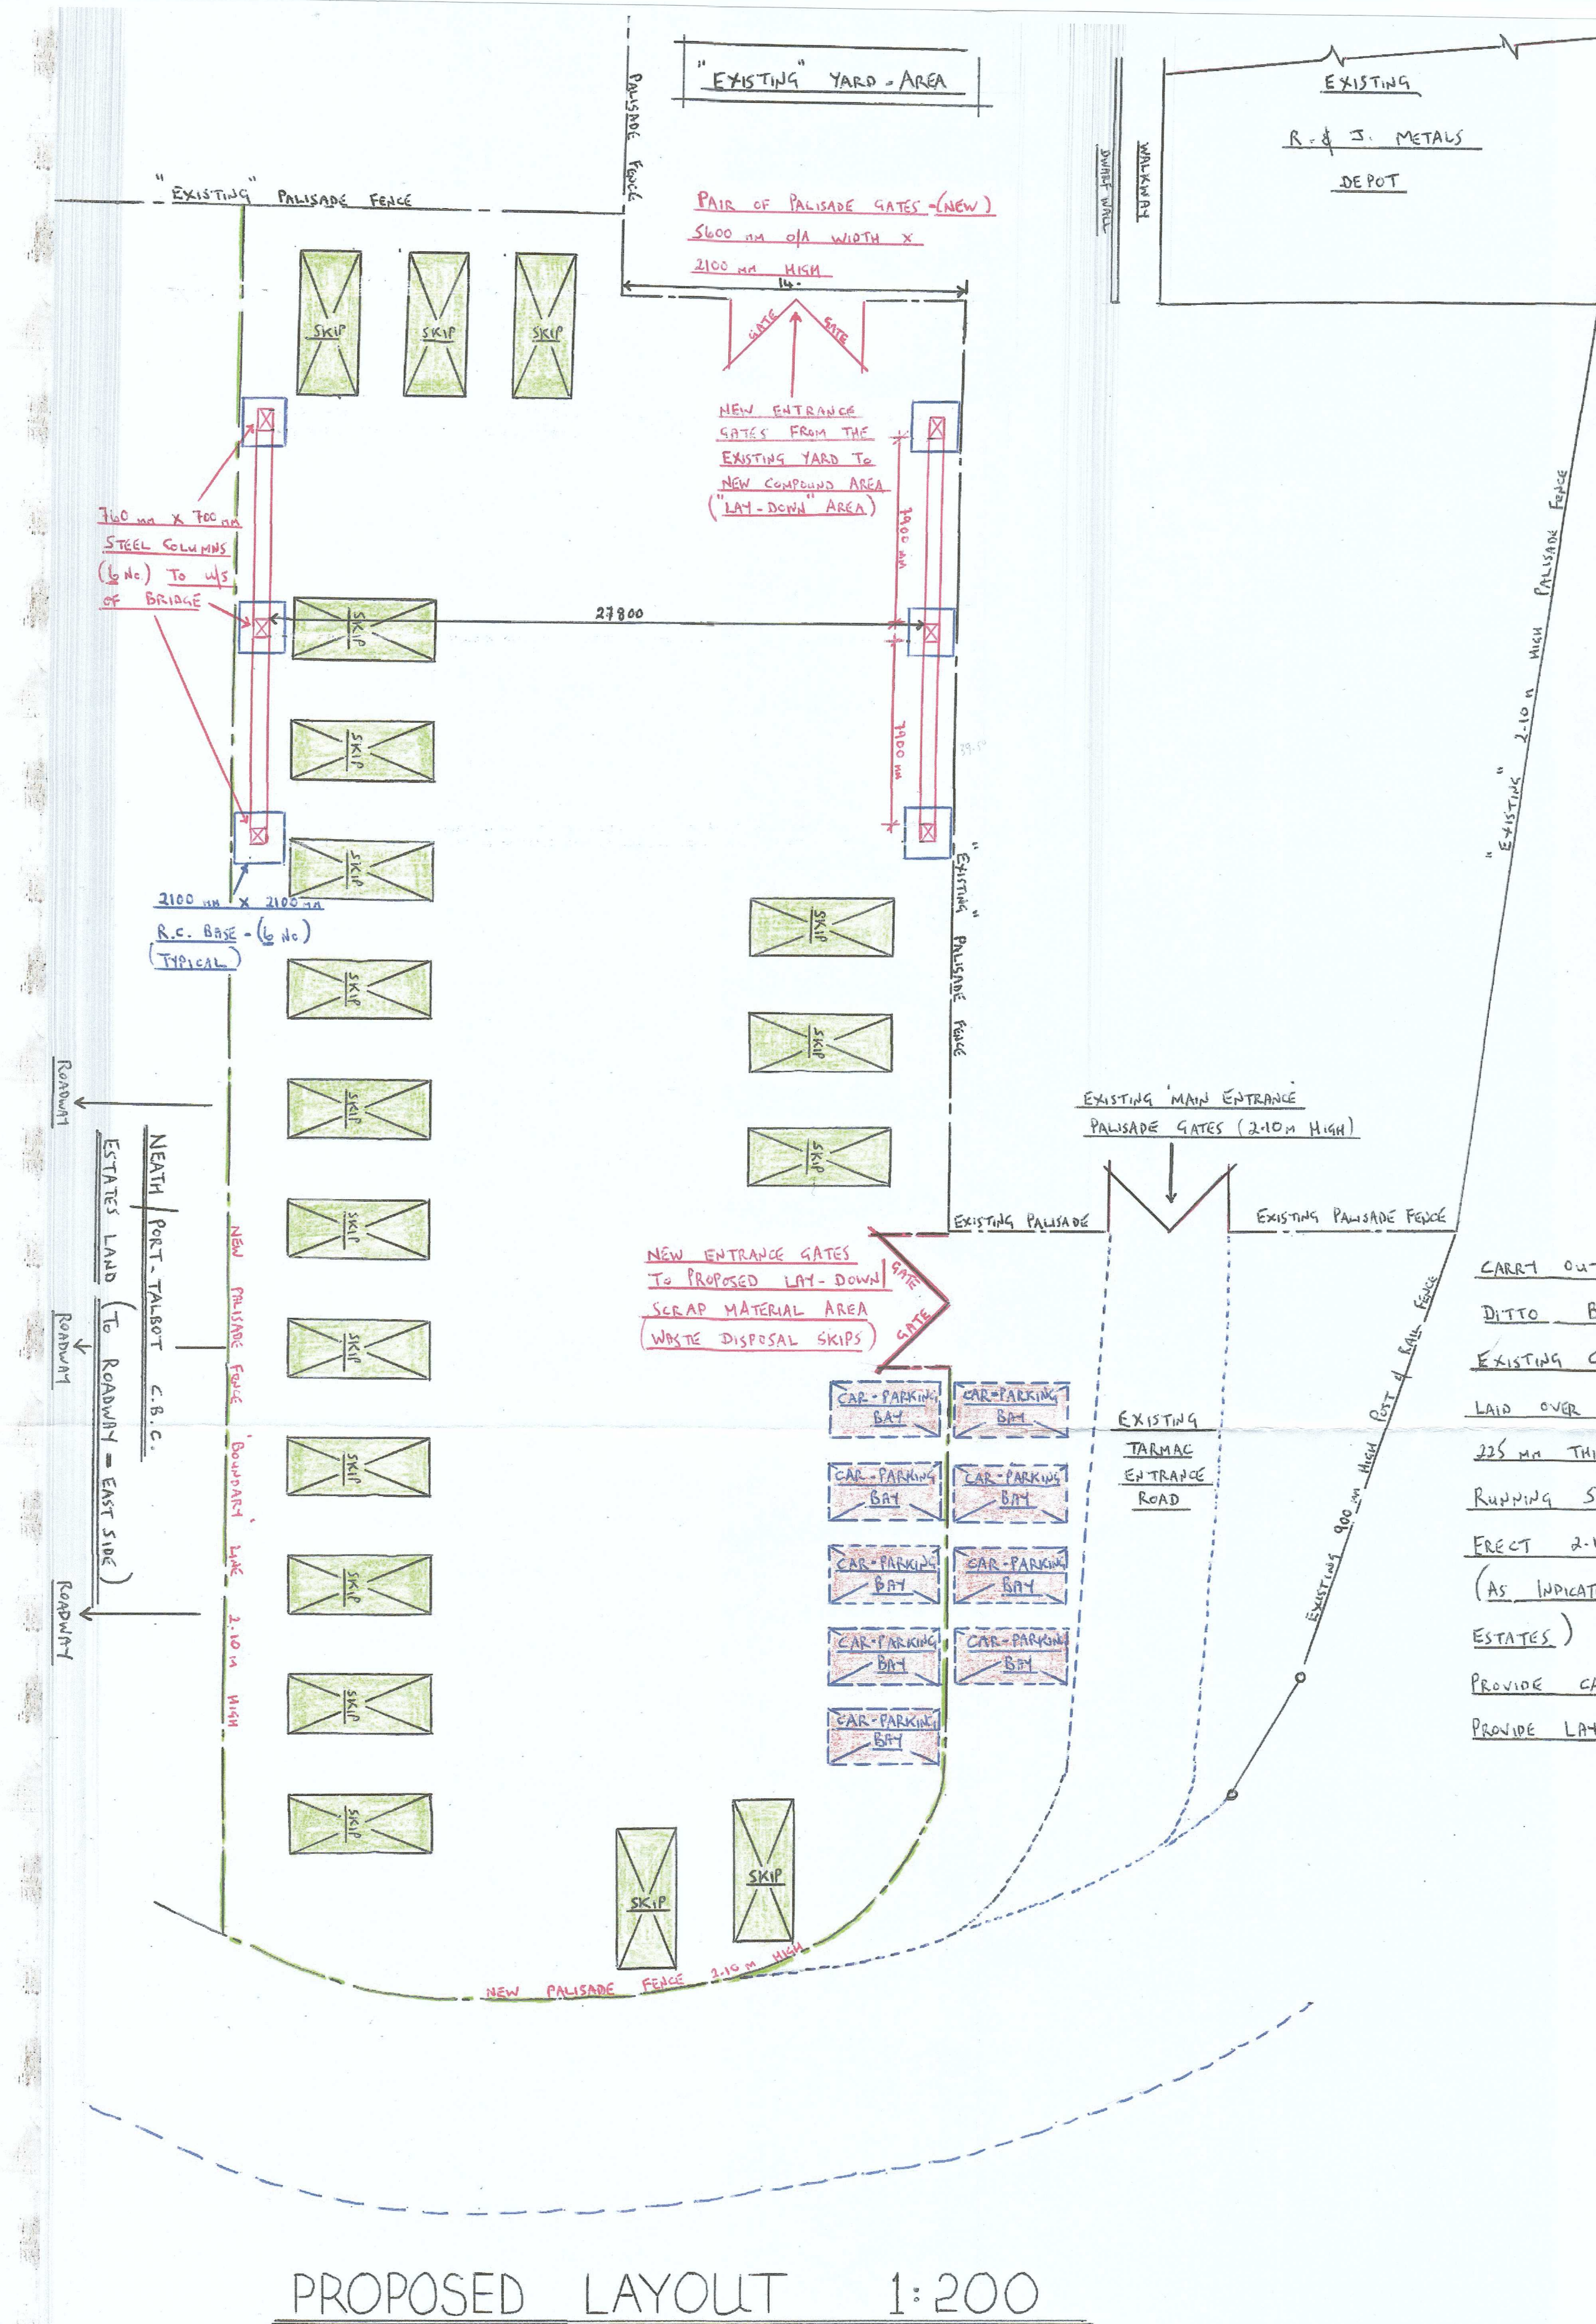

SPECIFICATION FOR PROPOSED WORKS

CARRY OUT ANY WORK(S) THAT IS SPECIFIED BY TREE SPECIALIST SURVEY.

DITTO BIODIVERSITY INVESTIGATION (BY SPECIALIST)

EXISTING GROUND (WITHIN NEW COFFINES) TO BE EXCAVATED / GRADED. LATER OF TERRAM D.P.M.

LAID OVER SURFACE OF GROUND; GROUND TO BE WELL-ROLLED AND CONSOLIDATED TO RECEIVE

225 mm THICK BED OF HARDCORE / SUB-BASE MATERIAL, BLENDED WITH STONE-DUST TO PROVIDE

RUNNING SURFACE FOR LORRIES / VEHICLES

ERECT 2.10 m HIGH PALISADE SECURITY FENCE, INCORPORATING 2 NO. SETS / PAIRS OF ACCESS-GATES

(AS INDICATED ON PLAN) TO COFFINES / PERIMETER OF NEW SITE (AREA RENTED FROM N. P.T.

ESTATES)

PROVIDE CAR-PARKING SPACES / BAYS (EACH 2.40 x 4.80 m); LOCATION AS SHOWN ON PLAN

PROVIDE LAY-DOWN / SCRAP MATERIAL AREA ("SHIPS"). COLLECTION / DELIVERY AREA.

