



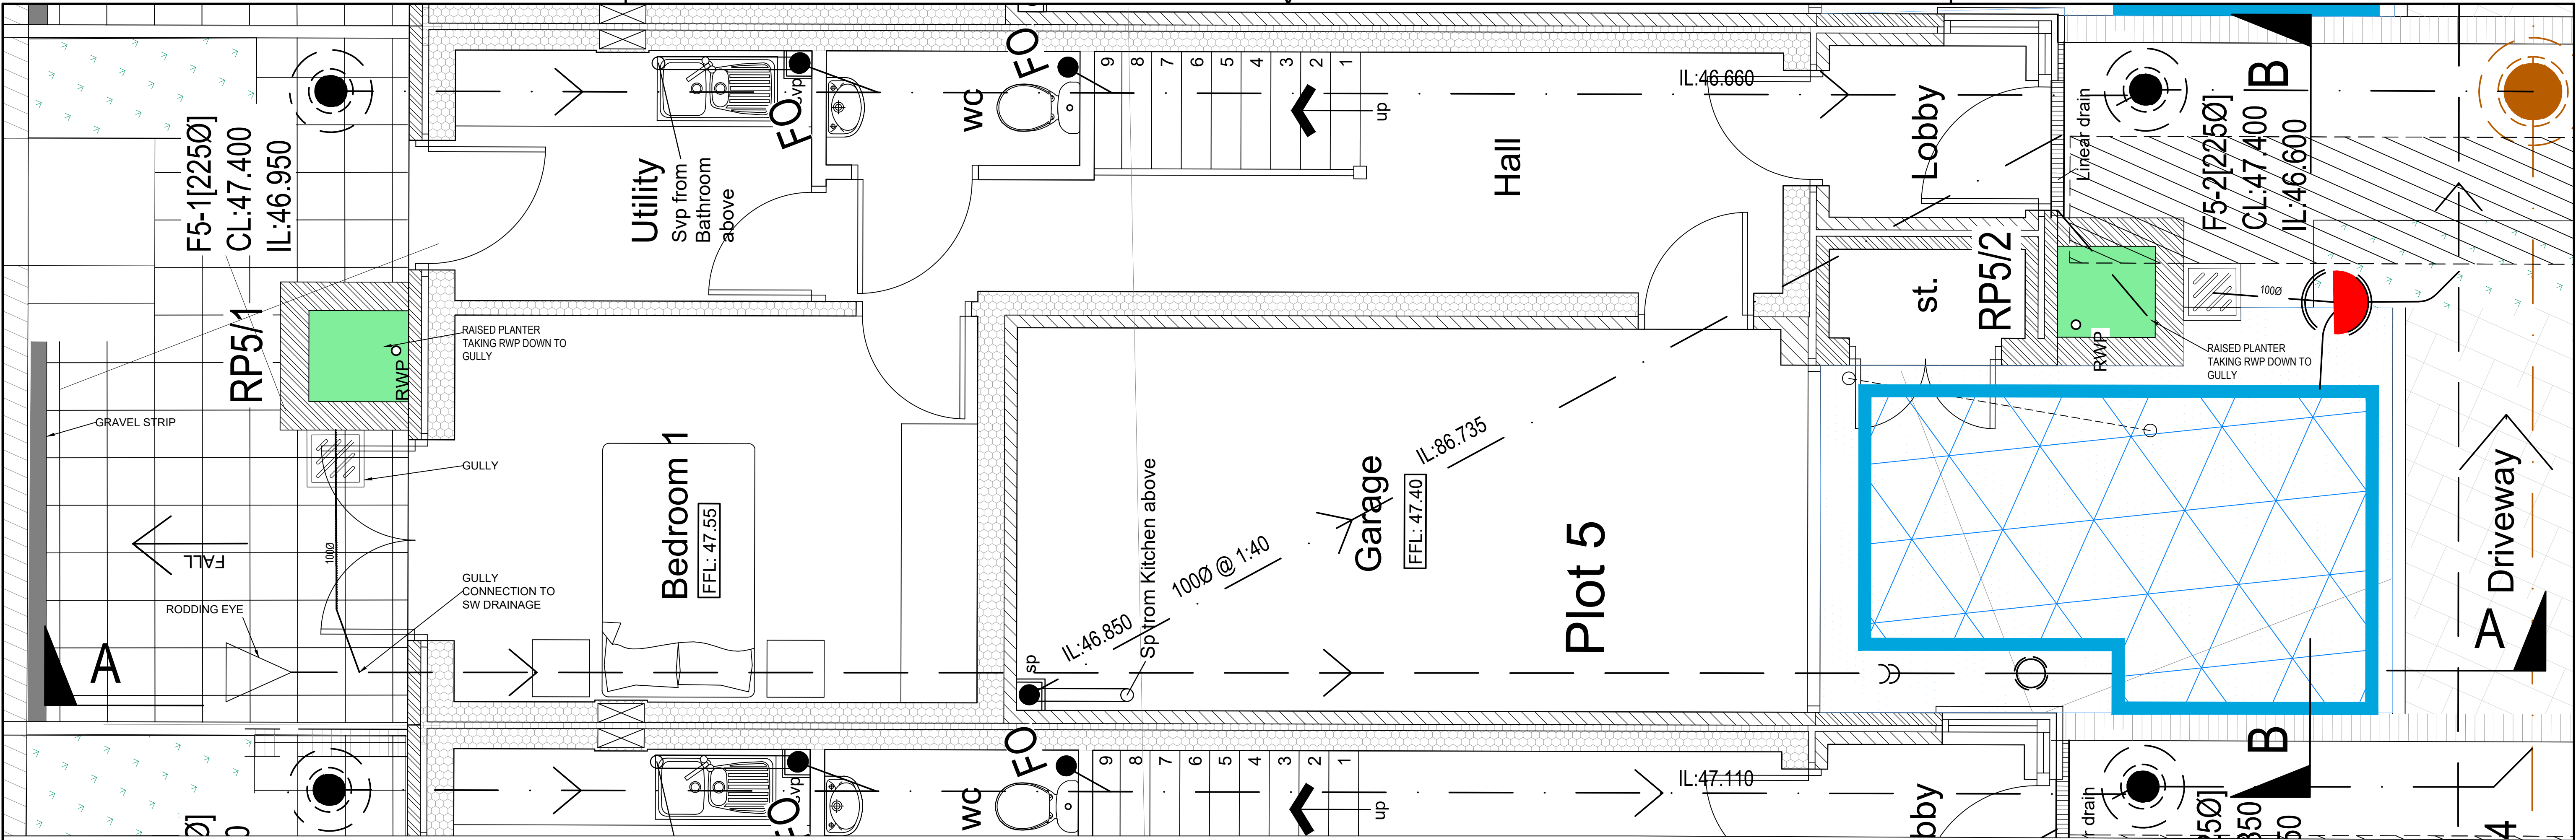

ENLARGED PLAN ON PLOT 5

Scale 1:25

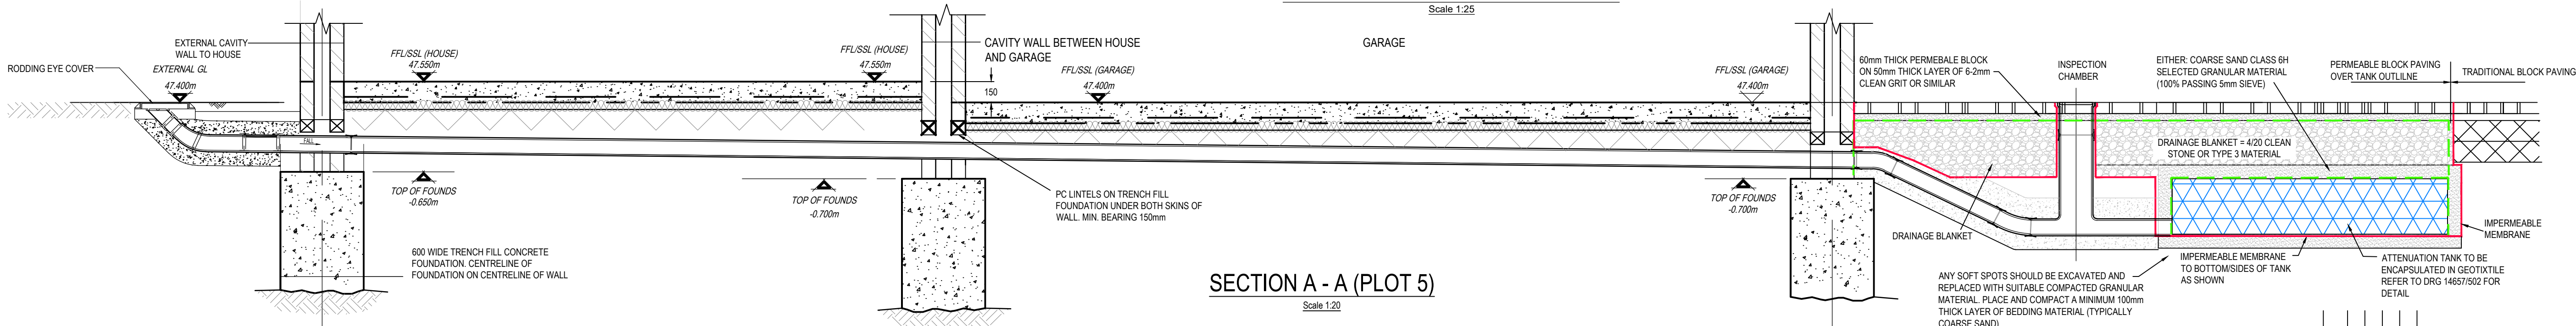


SECTION A - A (PLOT 5)

Scale 1:20

IMPERMEABLE MEMBRANE  
PERMEABLE GEOTEXTILE

NOTES:

- MH COVERS AND FRAMES TO CONFORM TO BS EN 124 - HIGHWAYS AND FOOTWAYS TO FRONT OF BUILDINGS (D400) - FOOTWAYS TO REAR OF BUILDINGS (C250).
- ALL PLOT FOUL DRAINAGE TO BE MINIMUM 100mm DIAMETER AND LAID AT 1 IN 40 UNLESS OTHERWISE NOTED.
- ALL ADOPTABLE THERMOPLASTIC STRUCTURED WALL SEWER PIPE SHALL COMPLY WITH THE RELEVANT PROVISIONS OF BS EN 13476-1 AND WS 4-35-01 AND BS EN 13476-2 OR BS EN 13476-3. PIPES SHALL BE BSI KITEMARKED OR HAVE EQUIVALENT THIRD PARTY CERTIFICATION. PIPES LESS THAN OR EQUAL TO 300mm DIA. SHALL HAVE A SHORT-TERM RING STIFFNESS OF NOT LESS THAN 8kN/m<sup>2</sup> (SN8).
- ALL JOINTING IN ACCORDANCE WITH MANUFACTURERS TECHNICAL ADVICE & SPECIFICATION.
- ALL NON ADOPTABLE DRAINAGE TO BE THE STANDARD UPVC 110mm, 160mm DRAINAGE AND MANUFACTURED TO BS-EN 1401 AND BS 4660 UNLESS NOTED OTHERWISE.
- ALL STORM WATER DRAINAGE TO BE A MINIMUM OF 150mm DIAMETER UNLESS OTHERWISE NOTED.
- SOIL & VENT PIPE LOCATION AND NUMBER TO BE CONFIRMED WITH ARCHITECT.
- THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL RELEVANT ENGINEERS DRAWINGS, TOGETHER WITH THE LATEST SPECIFICATIONS. ANY DISCREPANCIES ARE TO BE REPORTED TO THE ENGINEER (VALE CONSULTANCY) AS SOON AS POSSIBLE.
- FIGURED DIMENSIONS ONLY TO BE USED. ANY QUERIES OR DISCREPANCIES TO BE REFERRED TO THE ENGINEER (VALE CONSULTANCY) IMMEDIATELY.
- PRIOR TO ORDERING ANY MATERIALS THE CONTRACTOR IS TO CONFIRM MANUFACTURER/PIPE MATERIAL AND GRADE PROPOSED WITH WATER AUTHORITY.
- TEMPORARY WORKS DESIGN BY OTHERS.
- DESIGN RISK ASSESSMENTS AND METHOD STATEMENTS ARE TO BE PROVIDED TO THE PRINCIPLE CONTRACTOR PRIOR TO THE COMMENCEMENT OF ANY WORKS.

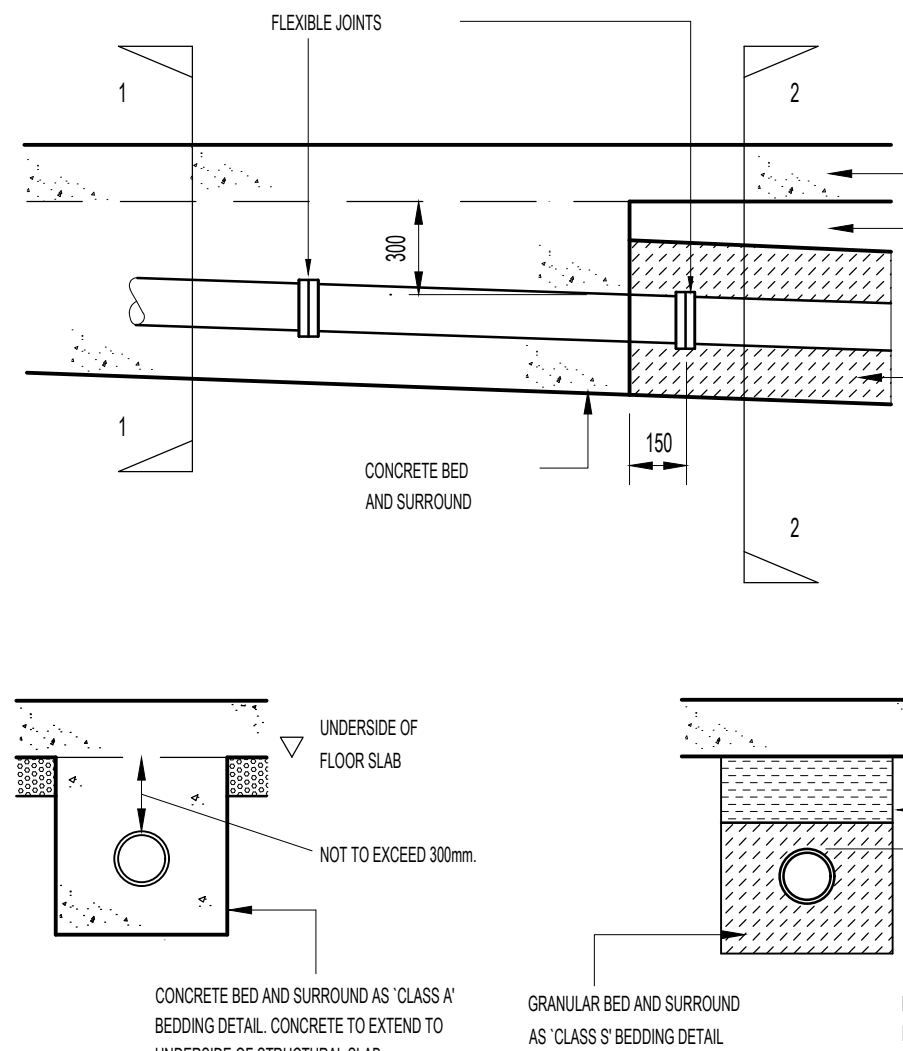


SECTION 1-1

SECTION 2-2

DRAINS UNDER BUILDINGS

N.T.S.

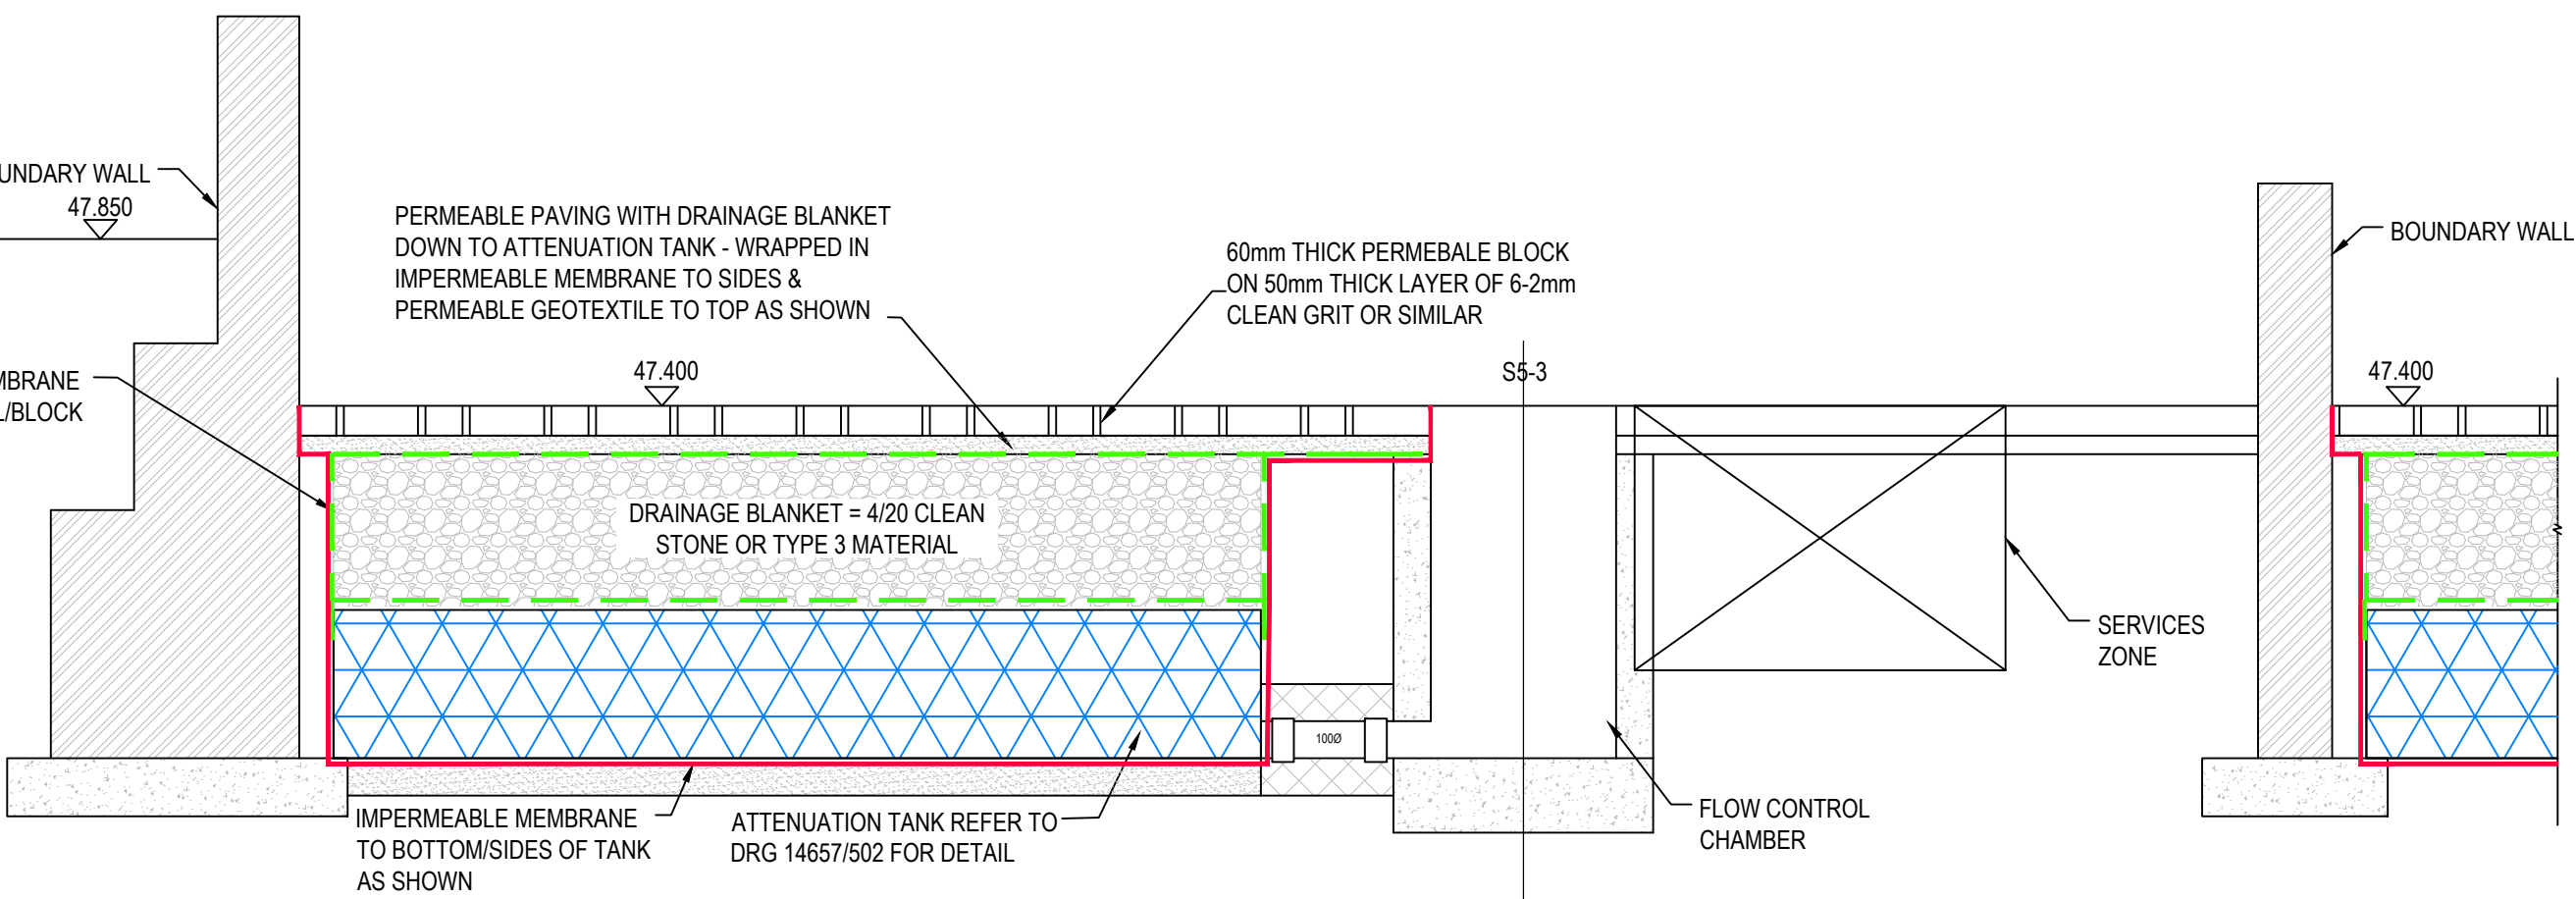

SECTION B - B (PLOT 5)

Scale 1:20

IMPERMEABLE MEMBRANE  
PERMEABLE GEOTEXTILE