

Grandison Brook Flood Alleviation Scheme

EIA Screening Report

Neath Port Talbot County Borough Council

December 2022



Notice

This document and its contents have been prepared and are intended solely as information for Neath Port Talbot County CBC and use in relation to the EIA Screening Opinion for the proposed Culvert at Grandison Brook.

Atkins Limited assumes no responsibility to any other party in respect of or arising out of or in connection with this document and/or its contents.

This document has 30 pages including the cover.

Document history

Document title: EIA Screening Report

Document reference: 5192793 EIA Grandison Brook EIA Screening 221205

Revision	Purpose description	Originated	Checked	Reviewed	Authorised	Date
1.0	First Draft	SN	NC	RM		05.12.22
1.1	Revised and issued	SN	NC	RM	RM	20.12.22

Client signoff

Client	Neath Port Talbot County Borough Council
Project	Grandison Brook Flood Alleviation Scheme
Job number	5192793
Client signature/date	

Contents

Chapter	Page
1. Introduction	4
2. The Site	5
2.1. Site Location and Description	5
2.2. Environmental Context	6
3. Proposed Development	7
3.1. Summary of proposed works	7
3.2. Need for Development	9
4. Screening Process	9
4.1. Screening Process	10
4.2. Environmental Topics Considered	11
5. Landscape and Visual Amenity	11
6. Construction Noise/Vibration	12
6.1. Baseline Conditions	12
6.2. Potential Effects	12
6.3. Mitigation	13
7. Traffic and Access	13
7.1. Baseline Conditions	13
7.2. Potential Effects	13
7.3. Mitigation	14
8. Flood Risk and Water Quality	16
8.1. Fluvial Flood Risk	16
8.2. Water Quality	17
8.3. Mitigation	18
9. Waste & Ground Conditions	18
9.1. Baseline Conditions	18
9.2. Potential Significant Effects	19
9.3. Mitigation	19
10. Archaeology and Built Heritage	20
10.1. Baseline Conditions	20
10.2. Potential Significant Effects	20
11. Biodiversity	21
11.1. Baseline Conditions	21
11.2. Potential Significant Effects	22
11.3. Mitigation Measures	23
11.4. Scope of Assessment	25
12. Conclusions and Recommendations	26
Appendices	27
Appendix A. Location Plan	28
Appendix B. Proposed Scheme Overview	29

1. Introduction

On behalf of Neath Port Talbot County Borough Council (NPTCBC), Atkins Ltd requests the Competent Authority (Neath Port Talbot County Borough Council) to adopt an EIA Screening Opinion to determine whether any of the potential environmental impacts of the Grandison Brook Flood Alleviation Scheme (the Scheme) are likely to give rise to significant effects, and therefore require assessment as part of an Environmental Impact Assessment under the Town and Country Planning (Environmental Impact Assessment) Regulations 2017 (the “EIA Regulations”).

This report reflects the requirements of the EIA Regulations and, in accordance with Regulation 5 of the EIA Regulations, this report contains:

- *“A plan sufficient to identify the land (see Appendix A);*
- *A description of the development (see Chapter 2), including in particular:*
 - *A description of the physical characteristics of the development and, where relevant, of demolition works;*
 - *A description of the location of the development, with particular regard to the environmental sensitivity of geographical areas likely to be affected;*
- *A description of the aspects of the environment likely to be significantly affected by the development;*
- *To the extent the information is available, a description of any likely significant effects of the Scheme on the environment resulting from:*
 - *The expected residues and emissions and the production of waste, where relevant; and*
 - *The use of natural resources, in particular soil, land, water and biodiversity; and*
- *Such other information or representations as the person making the request may wish to provide or make, including any features of the Scheme or any measures envisaged to avoid or prevent what might otherwise have been significant adverse effects on the environment”.*

In order to determine whether the Scheme is ‘EIA development’, regard must be given to the EIA Regulations.

In order to allow the Competent Authority to determine the need for EIA, this report provides a description of the site and Scheme, a review of the EIA screening criteria based on the EIA Regulations and a Site Location Plan at Appendix A.

2. The Site

2.1. Site Location and Description

The proposed scheme is situated in Briton Ferry and is located entirely within the administrative boundary of Neath Port Talbot County Borough Council (NPTCBC). The proposed scheme is located approximately 8km northeast of Swansea and 3km south of Neath. The Grandison Brook Flood Alleviation Scheme (the Scheme) is located primarily within the residential area of Briton Ferry, in Neath Port Talbot. The site area includes a large cemetery at Ynysmaerdy Road, school (Carreg Hir) and a number of recreational facilities/ amenities (bowling green, rugby and cricket club, football club, pitches and allotments) and undeveloped (formerly industrial) scrub land. In addition, the site incorporates transport infrastructure including a main road (A474) and railway lines (including the South Wales main line). There is a park and a woodland to the south of the site, beyond the proposed scope of works.

The town is located east of the River Neath, which flows in a north-east to south-west direction within the Neath Valley, bound by steep slopes within the upper sections of the valley, with the north and south slopes exceeding 100m AOD. The town is centred around the A474 (Neath Road and Pant Yr Heol) which acts as the district centre. The surrounding area, to the south-east is typified by steep wooded valleys which rise away from Briton Ferry, with densely populated housing area to the west of the A474. The proposed scheme is at an approximate average elevation of 7m Above Ordnance Datum (AOD), with the significantly higher elevation of 42m AOD at the south-east boundary of the Grandison Brook culvert. The topography of the wider area is more variable, with elevation decreasing in a west direction.

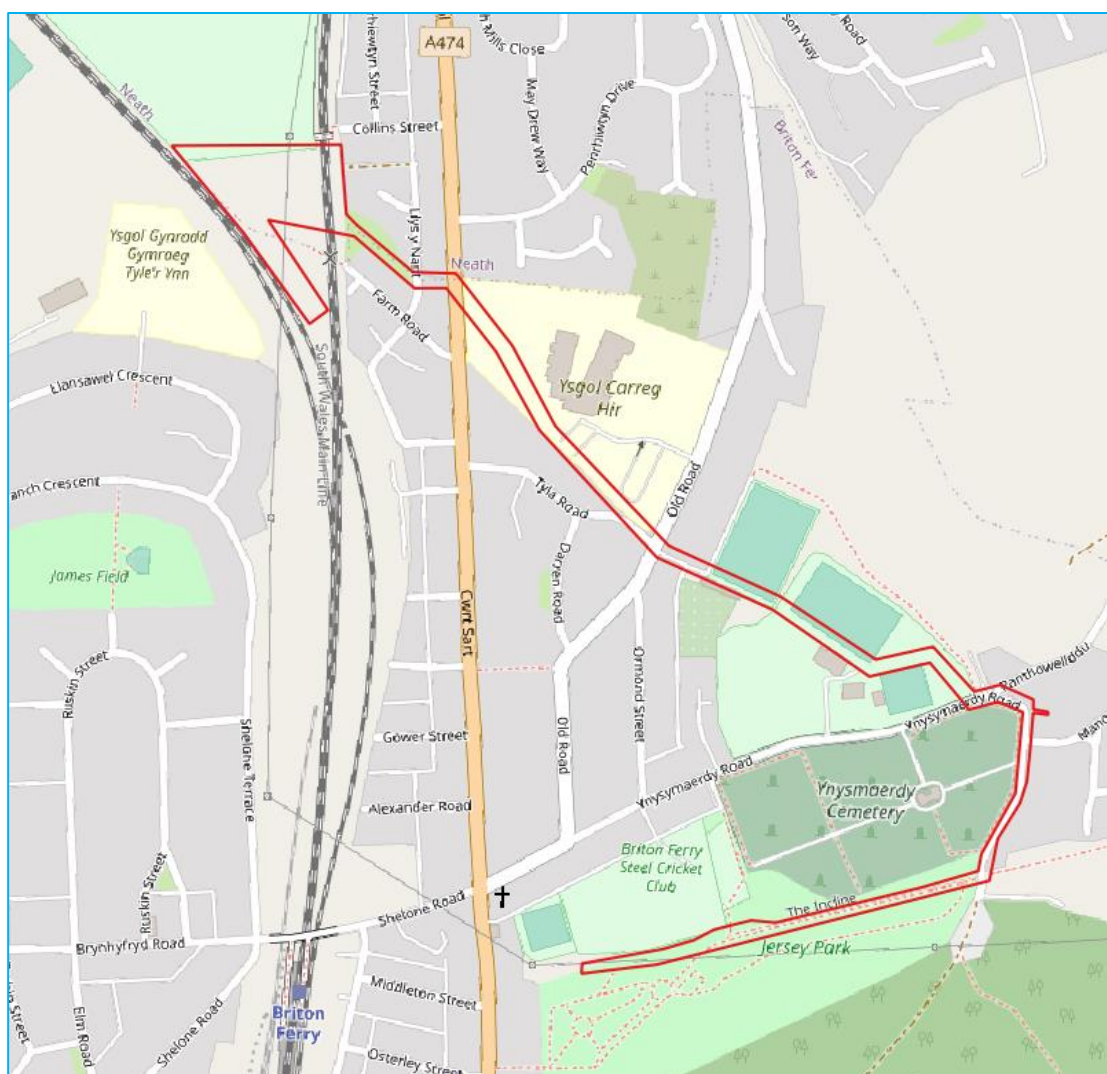


Figure 2-1 - Proposed Site Location

2.2. Environmental Context

A desk-based review of online environmental information resources has been undertaken to establish the potential sensitivity of the site and its surroundings. This has been supplemented by information provided in the individual assessments set out in this chapter. The report indicates that:

- The proposed embankment and culvert works at Grandison Brook are not located within an Area of Outstanding Natural Beauty (AONB);
- There is one designated nature conservation site within 2km of the proposed site (Earlswood Road Cutting);
- A Site of Special Scientific Interest (SSSI) is located approximately 1.5km south-west of the site and designated for geological features and ancient river systems.

There are six locally designated sites within 1km of the site, including.

- Eaglesbush Valley local nature reserve, located approximately 1km north-east of the site;
- The River Neath is a Sites of Importance for Nature Conservation (SINC) located 1km west of the site; There is an ancient semi-natural woodland to the south (18274);
- There is also a restored ancient woodland (11351) located within the vicinity of Jersey Park to the south and adjacent to the above.
- A Scheduled Monument is located approximately 160m north-east of the development site. The Scheduled Monument is located within the Ysgol Carreg Hir school grounds (Carreg Hir Standing Stone, Pen-Rhiw-Tyn).
- Jersey Park is designated as an Historic Park and Garden and Ynysymaerdy Railway Incline is a Scheduled Monument.
- The Natural Resources Wales (NRW) flood map indicates that the areas of Briton Ferry are at high risk of surface water flooding which is defined by NRW as a greater than 1 in 30 (3.3%) AEP event. These sources of flooding are predominantly from Grandison Brook Catchments. The second source can be seen as Ynysymaerdy Brook, which combines with Grandison within the current culvert system.

3. Proposed Development

3.1. Summary of proposed works

The proposed works will involve installation of a new culvert in the highway and through green spaces, also enclosing the current open channel within a culvert in some sections. The new culvert will re-join the existing watercourse further downstream before it discharges into the River Neath. The proposed development is shown in Drawings No. NE05_001-ATK-GEN-SWMWREC-DR-CD-000001/P01.1 and NE05_001-ATK-GEN-SWMWREC-DR-CD-000002/P01.1 in Appendix B which provides the Proposed Grandison Brook Scheme Overview. The Grandison Brook Flood Alleviation Scheme is required to mitigate flooding to properties along the Grandison Brook within Briton Ferry and comprises of the following elements:

- Localised raising of the existing bank along the Rhodfa Clarke walk to 0.5m high;
- Localised regrading of land, proposed drainage ditch and a new headwall near where the Rhodfa Clarke walk meets Ynysmaerdy Road;
- Proposed flood bund (0.5m high, 1 in 2 slopes and a 0.5m wide crest) located just inside the eastern boundary of Jersey Park and a slackened gradient to retain pedestrian access to the park.
- Excavation to create an attenuation pond within Jersey Park including new inlet structure, pipe inlet and a new section of watercourse;
- Refurbish the existing inlet structure of Ynysmaerdy Brook on Ynysmaerdy Road, modify the existing reinforced concrete inlet headwall structure with a replacement galvanised steel trash and security screen.
- Excavate and remove the existing culvert at Ynysmaerdy Road between the inlet and the playing fields and replace it with a new section of pipe culvert at 750mm diameter and 1200mm diameter in open trench, likely requiring multiple utility service diversions;
- Excavate for installation of a new 1200mm diameter culvert in open trench across the playing fields, through the Llansawel AFC grounds to Old Road, where multiple utility service crossings are likely to be needed, and then continuing in open trench through the school grounds towards Pant Yr Heol. There will have to be some additional works to make good any localised damage within the Llansawel AFC pavilion/spectator terrace;
- Excavate for the installation of a new 1200mm diameter culvert in open trench across Old Road and into the school grounds at Ysgol Carreg Hir. The proposed culvert will run in a north-easterly direction through the school grounds towards Pant Yr Heol Road.
- Before crossing Pant Yr Heol the culvert will change form from a 1200mm diameter pipe culvert to twin culverts each of 1250 x 750mm in size. The culvert will be installed in open trench excavation across Pant Yr Heol, through the existing gap between the houses, and continue towards the railway crossing; again, multiple utility service crossings are likely in Pant Yr Heol. Part of the existing section of open channel which runs along the railway embankment will become culverted;
- A new 1750 x 1000 box culvert will be constructed immediately to the northwest of the mainline railway line to connect to the existing brick arch culvert which passes under railway near Collins Street. Land to the rear of properties on Farm Road will be raised slightly over the route of the culverts. Due to this raising of land, gabion baskets will be required to support the earthworks alongside the existing watercourse part of which will be retained. Galvanised handrail will be installed on top of the proposed chamber structure where the new box culvert connects to the existing brick arch culvert. This chamber will be formed of concrete and will be around 1m above the existing ground. The storm water will then proceed within the existing ditch towards the freight railway line further to the west;
- A stainless steel flap valve will be installed on the downstream side of the existing railway culvert to prevent backflow of flood water towards the residential area at Pant Yr Heol.
- A proposed flood defence bund with crest level at 6.5m AOD immediately north of the freight railway line will be constructed to protect the rail line from increased flood levels during extreme storm events; A short section of concrete retaining wall around 1.25m high will be constructed above an existing culvert parapet wall as part of the proposed flood defence bund;
- There will be a general commitment to reinstatement the areas along the construction route, and landscaping proposals will be developed to make good once the works are finished. Most of the reinstatement will be straightforward replacement with similar materials where the proposed culvert crosses

the highway and the playing fields. It is likely that some trees will be lost through the school grounds and need replacement/ mitigation planting elsewhere (i.e. it is not recommended to plant trees near the new culvert).

- The area to be used temporarily for the contractor's site compound is described below. There is likely to be a separate compound needed to serve the works between the two railway corridors, potentially on land in private ownership (subject to landowner agreement).
- The culvert excavation is generally likely to be in the range of 2.5 to 3m deep and up to 3m wide.

It should be noted that the flood bund in Jersey Park and the attenuation pond in Jersey Park are options at this stage and only one of these elements would need to be implemented.

Proposed Temporary Works

Temporary works associated with the proposed development include a works compound area for the storage of plant and machinery and accommodation/welfare facilities, during the construction period. The proposed location for one of the temporary compound is within the Briton Ferry Woods Car Park on Ynysmaerdy Road (refer to Figure 3-1 below). The works compound will also be used for storage of topsoil from the excavations which will be used for reinstating the works area.

Other potential locations for site compounds include the car park at Ysgol Carreg Hir School or the car park at the cricket club.

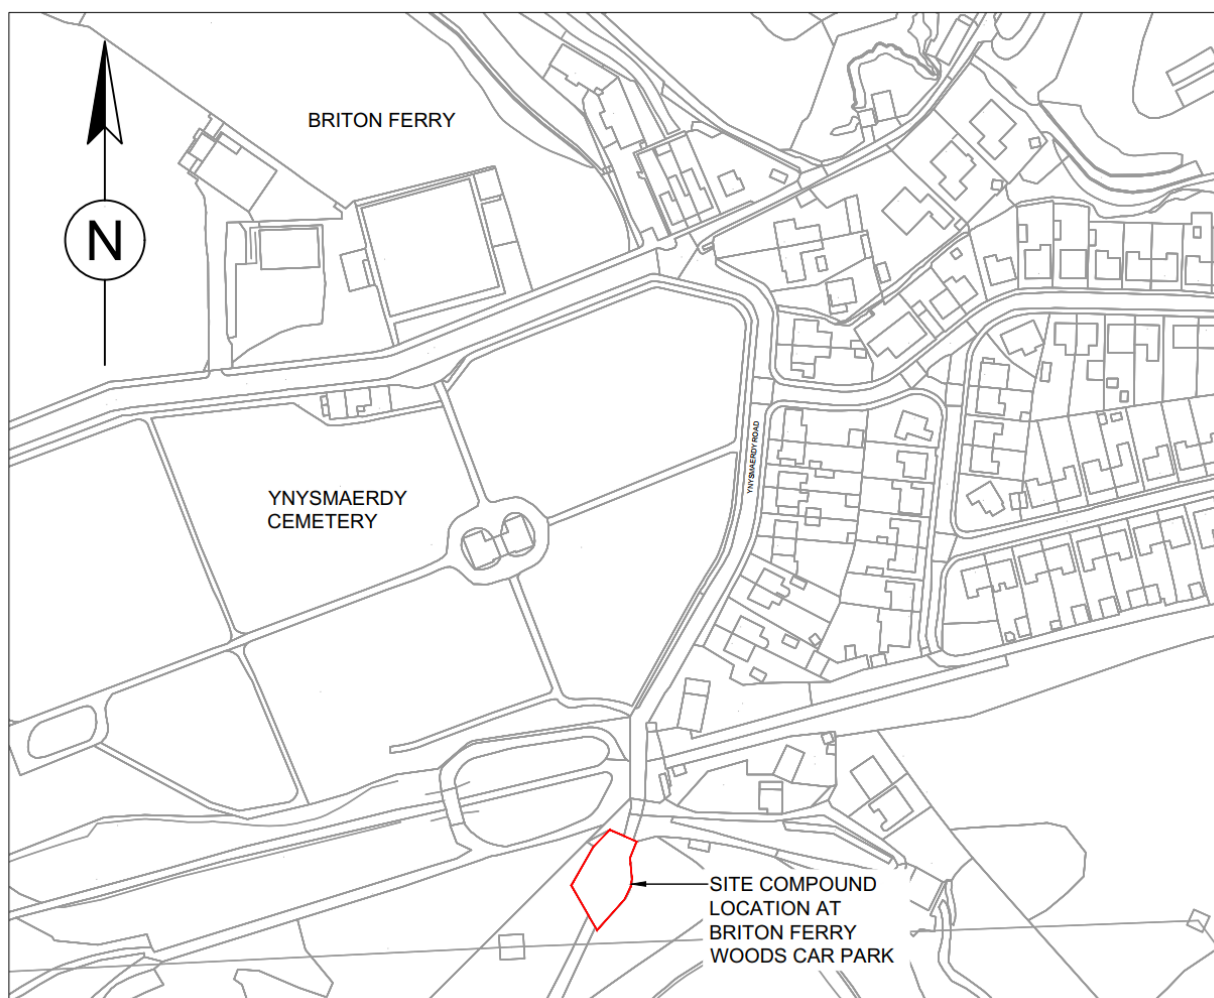


Figure 3-1 - Proposed Location of a Construction Compound

Construction of the Proposed Development

It is anticipated that all construction activities will be limited to daytime hours (for example, 7:30am to 6:00pm from Monday to Friday, and from 8:00am to 1:00pm on Saturdays, or similar). The anticipated duration of the

construction is 36 weeks. It is important to note that the overall scheme will be split into sections and as a result a phased approach will be taken.

3.2. Need for Development

The Pant Yr Heol area of Briton Ferry is subject to periodic flooding whereby residential and commercial properties are known to have flooded internally. The cause of the flooding arises from multiple sources associated with under-capacity of the Grandison Brook culvert. Flood water is known to spill out of bank at the inlet at Ynysymaerdy Road and flow overland towards Pant Yr Heol, and water is also forced out of the culvert at other locations. At the A474 Pant Yr Heol highway, surcharging of the culvert prevents surface water from draining away through the culvert, resulting in the ponding and collection of surface water on the highway and flooding of properties.

Grandison Brook arises in the Ynysymaerdy district of Briton Ferry. It is fed by open channel tributary watercourses of Upper Grandison Brook and Ynysymaerdy Brook. Both watercourses enter culverts and the two culverts converge near the junction of Ynysymaerdy Road and Pant Howell Ddu. The Grandison Brook is then conveyed underground for some 1.5km, under the A474 Pant Yr Heol road and another un-named road to the rear of the A474 (the service road approaching Brook Court/ Lys-y Nant Road), before passing under the railway line (Neath Branch) to ultimately discharge to the River Neath to the west of the two railway corridors.

Properties in the vicinity of Pant Yr Heol in Briton Ferry experience flooding because there is insufficient capacity in the existing drainage system to convey surface water from the Grandison Brook during certain storm events. The proposed scheme is required to alleviate high probability flood risk from the Grandison Brook watercourses to properties on Briton Ferry. Following detailed feasibility and hydraulic modelling, this scheme (proposed application) is put forward for works to provide capacity to alleviate flooding to the 1 in 100 year/1% Annual Exceedance Probability (AEP). The proposed removes over 264 buildings from receiving damage from the predicted 1% (1 in 100) Annual Exceedance Probability (AEP) flood extent. The works will involve installation of a new culvert along a route parallel to the existing culvert system within the highway and through playing fields, which will be buried underground. The overall increase in the capacity of the new culvert system will allow flood flows to continue to discharge from Grandison Brook to the River Neath.

Atkins was commissioned to undertake the detailed design work for the scheme in September 2019 which included carrying out of detailed hydraulic modelling. The modelling work highlighted updates to hydrological assumptions using latest guidance from that carried out in earlier studies and also confirmed that the original proposals caused detrimental effects in flooding to downstream property receptors. Significant reworking of the scheme was undertaken to avoid the detriment which has resulted in a larger scheme than originally envisaged i.e. a longer proposed culvert which outfalls to a watercourse which connects in the River Neath.

4. Screening Process

The EIA Regulations require that before consent is granted for certain types of development, an EIA must be undertaken. The EIA Regulations set out the types of development for which EIA is mandatory in Schedule 1 and other developments (defined in Schedule 2) which may require an EIA if they exceed specified thresholds and have the potential to give rise to significant environmental effects.

The following should be considered in determining whether the proposed Scheme at Grandison Brook constitutes EIA development:

- If the proposed development is of a type listed in Schedule 1;
 - If not, whether the proposed development is of a type listed in Schedule 2; and, if so, whether:
 - any part of it is located within a sensitive area; or
 - it meets any of the relevant thresholds and criteria set out in Schedule 2; and
 - it would be likely to have significant effects on the environment.

These points are explored further in this section with reference to the EIA Regulations.

4.1. Screening Process

4.1.1. Schedule 1 Projects

EIA is mandatory for projects listed in Schedule 1 of the EIA Regulations. Schedule 1 developments are large scale projects for which significant effects would be expected and comprise developments such as new airports and power stations.

The proposed development is not of a type listed in Schedule 1 and is reviewed in the following section to determine whether it is Schedule 2.

4.1.2. Schedule 2 Projects

The EIA Regulations define “Schedule 2 development” as development, other than exempt development, of a description mentioned in column 1 of the table in Schedule 2 “where—

- a. *any part of that development is to be carried out in a sensitive area; or*
- b. *any applicable threshold or criterion in the corresponding part of column 2 of that table is respectively exceeded or met in relation to that development;”*

Sensitive Areas considered in the EIA Regulations include:

- Sites of Special Scientific Interest (SSSI) and European Sites;
- National Parks, the Broads, and Areas of Outstanding Natural Beauty (AONB); and
- World Heritage Sites and Scheduled Monuments.

In certain cases, local designations which are not included in the definition of sensitive areas, but which are nonetheless environmentally sensitive, may also be relevant in determining whether an assessment is required. Furthermore, in considering the sensitivity of a particular location, regard should also be had to whether any national or internationally agreed environmental standards are already being approached or exceeded.

The proposed works do not fit into any of the development descriptions listed in Column 1 of the table in Schedule 2 of the Regulations. The closest description is found in Part 10(h) infrastructure projects which includes ‘urban development projects’ such as flood -relief works. The site area for the works is likely to be above the 1ha size threshold in Column 2 of the table and located in close proximity to a Schedule Ancient Monument and so the Scheme is considered to be a ‘Scheduled 2 Development’.

For Schedule 2 development EIA is required if the development is ‘likely to have significant effects on the environment by virtue of factors such as its nature, size or location’.

There is one designated nature conservation site within 2km of the proposed site; Earlswood Road Cutting and Ferryboat Inn Quarries Site of Special Scientific Interest (SSSI) is located approximately 1.5km south-west of the site and designated for geological features and ancient river systems. There are four locally designated sites within 1km of the site, including:

- Eaglesbush Valley local nature reserve, located approximately 1km north-east of the site;
- The River Neath is a Site of Importance for Nature Conservation (SINC) located 1km west of the site;
- There is an ancient semi-natural woodland to the south (18274); and
- There is also a restored ancient woodland (11351) located within the vicinity of Jersey Park to the south and adjacent to the above.

There appears to be no Tree Preservation Orders (TPO) within the site area. The NPTCBC Arboriculturist has confirmed there are no tree preservation orders within the grounds of the school.

A public right of way (PRoW) runs through the sports ground (Footpath 37/MO.ANY1/1) starting at Ynysmaerdy Road. It follows the northern edge of the sports ground, the eastern edge of the football ground, and ends where the access road for the sports ground meets Old Road. There is a pedestrian footbridge over the railway line at Collins Street, but this is disused and sealed by Network Rail to prevent pedestrian access.

During construction there is the potential for some temporary adverse effects due to noise emissions, dust generation, disruption to vehicular and non-vehicular access and water pollution and soil pollution. However,

subject to the implementation of normal mitigation measures regarded as good practice, such effects are unlikely to be significant.

4.2. Environmental Topics Considered

The following sections set out a review of the above criteria and requirements and specifically addresses the Scheme in relation to the following topics:

- Landscape/Visual Amenity
- Construction Noise/Vibration
- Flood Risk & Water Quality
- Construction Traffic
- Waste and Ground Conditions
- Built Heritage and Archaeology
- Ecological Impact Assessment

5. Landscape and Visual Amenity

Construction Effects

Construction activities associated with all aspects of the Scheme, including construction compounds will require temporary above ground works which will have a temporary adverse effect on landscape character and on the visual amenity of local residents, users of green spaces and people travelling through the area. The construction activities will introduce small scale, localised and temporary uncharacteristic features such as excavators, dumpers and associated workforce.

Once the affected culverts either within the public highway or in green spaces have been replaced, the original landscape will be reinstated.

Given the short duration of these construction activities, and the commitment to reinstate the landscape along the construction route, the effects on landscape character and visual amenity will not be significant.

Some elements of the Scheme will involve loss of vegetation including trees. The Scheme will incorporate a landscape planting strategy to mitigate for the loss of trees and other soft landscaping.

Operational Effects

The replacement culverts will be buried and so, once constructed, they will generally have no impact on landscape character or visual amenity. The new box culvert adjacent to the railway will include earthworks and gabion baskets plus galvanised handrail on top of a proposed chamber near the existing brick arch culvert under the railway. While these elements of the Scheme will introduce new above ground features that will be permanently visible, they will not be in a prominent location and are not predicted to have a significant effect on landscape character or visual amenity.

The Scheme is an engineering project to manage surface water drainage. As such its aesthetic design is utilitarian and simple. The sizing of the various elements that form part of the Scheme, such as inlet structures and headwalls is determined by the capacity required to manage flood risk so the various elements will be slightly larger in scale.

The raised embankment proposed along the Rhodfa Clarke Footpath would impact on visual amenity but due to the limited scale of those works, the effect is not predicted to be significant.

The introduction of a flood bund in Jersey Park including any vegetation clearance would impact on landscape character and visual amenity. However due to the limited scale of the proposed bund those impacts are unlikely to be significant.

Excavation to create an attenuation pond and the establishment of a new section of watercourse within Jersey Park, including vegetation removal, will impact on landscape character and visual amenity. Given the limited scale of these elements of the Scheme and with landscape mitigation in place, the impact is not expected to be significant.

The introduction of a flood defence bund and a precast concrete headwall north of the freight railway line would not have a significant effect on landscape character or visual amenity due to the limited scale of the works, the low sensitivity of the receiving landscape and the limited visual envelope of that part of the development site;

The proposed scheme development has been carefully designed to ensure its visual impact is as limited as possible whilst still providing flood alleviation to neighbouring properties. The scheme design seeks to minimise its impact above ground while not impacting on the ancient woodland or streetscape within Briton Ferry. The arrangement and mainly underground nature of much of the scheme and the colours of materials chosen ensure that it is acceptable in design and visual terms.

6. Construction Noise/Vibration

6.1. Baseline Conditions

The Grandison Brook Flood Alleviation Scheme (Proposed Development) is located primarily within the residential area of Briton Ferry. There are numerous noise sources within proximity to the Scheme including:

- Railway line and associated train activity on the South Wales Main Line which runs trains to Swansea and West Wales. There is no strategic noise mapping from railway lines available for the Briton Ferry area.
- The (Ysgol Carreg Hir) Primary School
- A number of recreational facilities/amenities including bowling green, rugby and cricket club, football club, pitches and allotments;
- Commercial premises including shops, cafes, a small industrial estate and garages off Station Road;
- Road network, including the main road (A474) which is a key transport route through Briton Ferry. Excess road noise levels identified within the area of the Scheme are centred around the A474 affecting the primary school adjacent to the proposed works, and several residential properties in proximity to the culvert works.

6.2. Potential Effects

A qualitative review of the potential effects in relation to construction noise and vibration has been carried out. No detailed modelling or assessment work has been carried out.

Construction

Construction of the Scheme will result in an increase in noise from construction traffic and plant noise associated with general construction activities. All construction noise will be managed through standard best practice measures including through adopting standard working hours.

The Ysgol Carreg Hir Primary School and residential properties along Tyla Road are located within the buffer area for the proposed construction of a new 1200mm diameter culvert. Properties located at Brook Close are located within proximity to the proposed pre-cast box culvert.

Properties located along Ynysmaerdy Road are close to proposed works to replace a culvert, modify the inlet structure and the new headwall structure.

All construction noise impacts will be short term, temporary and fully reversible when works are completed.

Operation

Following construction, routine maintenance of the Scheme assets, as well as the wider Scheme will consist of inspections of the assets and management of vegetation along the watercourse. This will likely be undertaken

by hand/stripping and will not generate large amounts of noise. Periodic cleansing of the drainage network would be undertaken every few years by specialist drain cleaning 'Jetvac' machinery. Therefore, no operational impacts from noise and vibration are anticipated.

6.3. Mitigation

To minimise the disturbance due to noise during the construction phase of the Scheme, the following measures will be implemented:

- Construction working hours will be limited to between 7:30 and 18:30 Monday to Friday, and 08:00 and 13:00 on Saturdays. No construction activity will be undertaken on Sundays or Public Holidays.
- All equipment will be well-maintained and, where possible, will be used in the mode of operation that minimised noise. Plant and equipment will be shut down when not in use. Mobile construction plant and compounds will be located, as far as reasonably practicable, away from adjacent occupied buildings or as close as possible to noise barriers or site hoardings to provide additional screening from sensitive noise receptors. Materials will be handled in a manner than minimised noise with minimal drop distances when offloading material.
- Reversing alarms will incorporate one of the following features where practicable: directional sounders, broadband signals, self-adjusting sounders, flashing warning lights. Alternative comparable systems may be used. Vehicles will not wait or queue on the public highway with engines running. Only designated lorry routes will be used, in normal working hours where possible.

With the adoption of standard working practices, no significant noise effects during the construction of the Scheme are likely.

7. Traffic and Access

7.1. Baseline Conditions

Part of the proposed development site crosses the A474 (Pant yr Heol), which runs from Neath to Briton Ferry. Several local residential streets also lie within the proposed development site.

A new inlet structure is to be situated at the base of the Rhodfa Clarke footpath. Part of that footpath is a public right of way (PRoW footpath 30/MO.ANB18/1).

A public right of way (Footpath 37/MO.ANY1/1) runs along the northern edge of the rugby pitch.

7.2. Potential Effects Construction

During construction, there will be an increased level of traffic and plant on the roads as a result of delivering personnel, materials and plant to site. The A474 highway provides the principal route into the area

Access for construction traffic to the works proposed to the east of the A474 will be from the local highway network including the A474, Ynysmaerdy Road, Old Road and Tyla Road. Construction traffic will also use Ynysmaerdy Road to access the proposed construction compound at the Briton Ferry Woods car park or off Old Road for site compounds at the school or cricket ground. Access to the work areas west of the A474 will be via the A474 and the residential roads and the unnamed routes which lie between the A474 and the South Wales mainline railway. The proposed works between the railway lines would be accessed by the A474 and a private access across the South Wales mainline railway.

To construct the proposed Ynysmaerdy Road culvert, temporary lane closures will be required along Ynysmaerdy Road, which will affect access to Manor Way. It is envisaged that access to these streets for residents and local businesses will be continued for the duration of the construction works, with the lane closure controlled by either temporary traffic signals or a banksman. Properties to the east of Ynysmaerdy Road will continue to have access during the construction period. Due to low construction traffic volumes and the limited duration of the works, the Scheme will not materially affect the operation of the local road network or

significantly affect access for local residents or people accessing recreational facilities in and around the development site. A separate highways order from the highway authority will be requested for the traffic management works. Once construction is complete the roads will be returned back to their original state.

Footpath Diversions

It is likely that the Rhodfa Clarke Footpath would need to be closed temporarily during works proposed alongside the footpath.

The public right of way which runs along the northern edge of the rugby pitch (Footpath 37/MO.ANY1/1) would need to be temporarily closed and diverted during the replacement of the culvert at the southern end of the public right of way.

Temporary footway closures will be required where works are proposed across those footways. Temporary and minor diversions will be put in place to ensure safe pedestrian access is maintained during construction of the Scheme.

Given the short timeframes for footpath diversions, the impacts of footpath diversions are anticipated to have a minor adverse temporary effect during construction, which is not significant.

Access to sports and recreational facilities

The access point into Jersey Park from the eastern boundary would need to be temporarily closed during construction of the flood bund in that location. This would have an adverse effect on access to the park. The closure would be short in duration and there is an alternative access into the park on the western boundary. Where necessary the gradient of the flood bund would be slackened to ensure pedestrian access to the park is maintained.

During construction of the Scheme, the Briton Ferry Woods car park would not be available for parking as it would be used as a construction compound. This would affect access to the woods for recreational use. However, the availability of alternative parking on Ynysymaerdy Road would minimise the effect of the car park closure on recreational users of the woods.

To undertake the works to replace the culvert under the football and rugby pitches the temporary closure of those facilities would be necessary. This would impact users of those facilities.

Operation

Once operational the transport implications of the Scheme will be limited to regular maintenance and asset survey activities undertaken by NPTCBC. The Scheme works will act to reduce the frequency of future maintenance required for each of the assets. Therefore, there will be no discernible changes in traffic movements as part of operation of the Scheme.

Once construction of the Scheme is complete users of public rights of way, other footpaths and local recreational facilities should benefit from the expected decrease in flood risk as a result of the Scheme.

7.3. Mitigation

To reduce disruption to the road network due to the increase in vehicle movements during construction, the following wider traffic and transport management measures will be implemented

- Deliveries of plant and large volumes of material should be organised to take place between 9:30hrs and 16:00hrs to minimise the effects of additional traffic on the roads.
- No night-time working is planned to take place as part of the Scheme, however if this is required for specific sites night working will be reviewed with the possibility of this occurring on weekday nights only.

Indicative traffic volumes during construction and the duration and timing of lane closures will be captured for each element of the Scheme within a dedicated Traffic Management Plan (TMP), which will be managed by the contractor throughout the duration of the construction works.

Pedestrian and traffic management measures will be implemented at the site in line with the TMP. This will include construction programming to minimise the duration of temporary footpath closures/diversions and using temporary fencing and signage to maintain safe access for footpath users.

A designated access route for the movement of plant and equipment from the compound area to the location of the proposed works will be established within the extent of the site.

On completion of the works, the compound area will be demobilised and all plant, lighting, temporary welfare facilities, offices, storage etc will be removed. The car park and footpaths will be returned for use by the public.

The works to replace the culvert under the football and rugby pitches would be carefully programmed to minimise the impact on the use of those facilities. In addition, following installation of the replacement culvert the affected ground would be re-instated to its pre-works condition. In conclusion, with good construction practice measures in place, the construction and operation of the Scheme will not have significant effects on operation of the local road network, on local accessibility or the use of recreation facilities.

8. Flood Risk and Water Quality

8.1. Fluvial Flood Risk

The proposed works associated with the Scheme are located solely within the Grandison Brook.

The Natural Resources Wales (NRW) flood mapping (shown in Figure 7-1 below) indicates that the fluvial risks to Briton Ferry are predominantly associated with the River Neath. It should be noted that not all ordinary watercourses (e.g., Grandison Brook) are included in the NRW Flood Risk Map therefore not all potential fluvial flood sources are represented in the figure below. The NRW fluvial flood risk map indicates that areas of Briton Ferry are at a high risk of flooding which is defined by NRW as a greater than 1 in 30 (3.3%) AEP event.

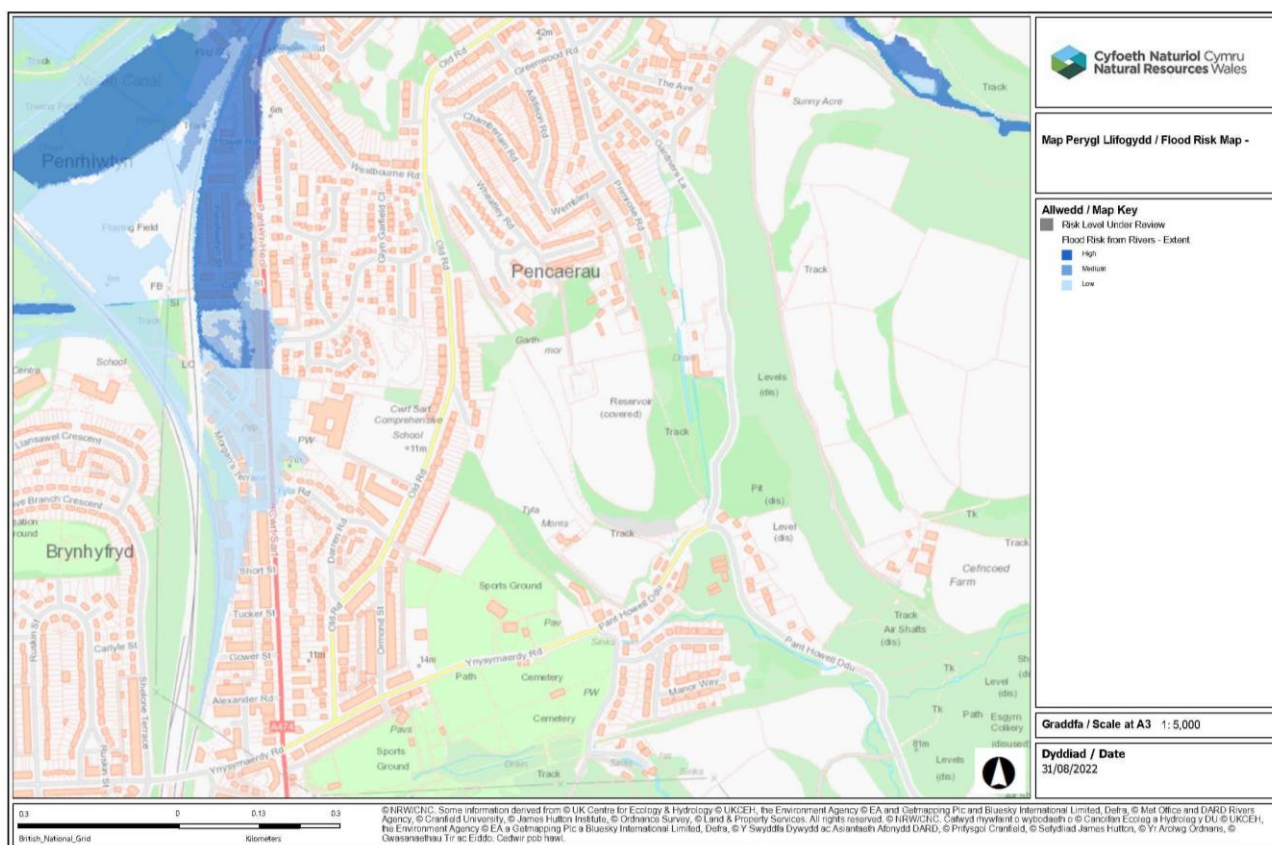


Figure 8-1 - Natural Resources Wales Flood Map - fluvial flood risk map

The Grandison Brook travels down a steep valley side where it passes through a semi natural woodland to the south Ynysmaerdy Road. From here, the watercourse travels through an open channel adjacent to the Rhodfa Clark footpath. The watercourse then travels through a culvert system that has multiple diameter changes and, a significant blockage has been identified. These pass under the highway, sports and recreational grounds, school grounds, and returning to an open channel, between residential properties. The open channel flows through two existing culvert structures under the railway embankment, once it reaches the second culvert it returns to free open flow, and eventually discharges to the River Neath at approximately 1.1km downstream.

Surface water flood risk

The NRW flood mapping (shown in the figure below) indicates that areas of Briton Ferry are at a high risk of surface water flooding which is defined by NRW as a greater than 1 in 30 (3.3%) AEP event. These sources of flooding are predominantly from the Grandison Brook catchments. The second source can be seen as Ynysmaerdy Brook, which combines with Grandison Brook within the current culvert system.

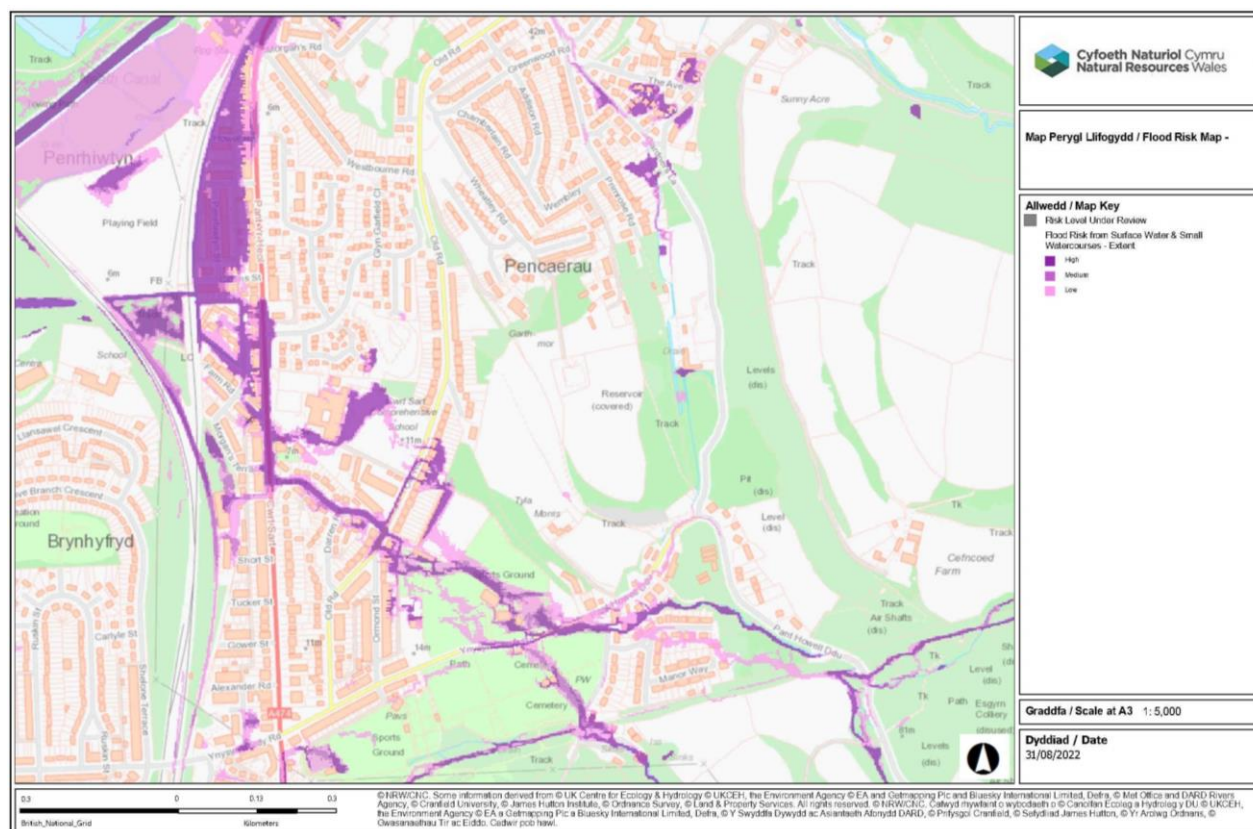


Figure 8-2 - Natural Resources Wales Flood Risk Map -surface water flood risk

A Flood Consequences Assessment (FCA) (Atkins, August 2021) for the Scheme can be produced in accordance with Technical Advice Note 15 (TAN 15) for submission with a planning application. Although TAN 15 relates to the siting and impact of new development it provides a framework within which risks arising from both river and coastal flooding can be assessed. TAN 15 does not permit flood risk elsewhere to be increased as a result of developing a site. One of the key issues the FCA assesses is whether there is an adverse effect on fluvial flooding as a result of the proposed improvements through the construction of the alleviation scheme which in effect is reducing the amount of water being stored on the floodplain.

The modelling assessment with scheme has demonstrated that the consequences of flooding of the proposed scheme are acceptable and that the flood risk can be managed, and this has been accepted by NRW. In addition, the scheme will reduce the flood risk to the people and both residential and commercial properties of Briton Ferry.

8.2. Water Quality

Construction

The proposed works will require an Ordinary Watercourse Consent, which will be obtained prior to construction activities commencing.

Despite the beneficial long-term effect of this flood alleviation scheme, construction activities involving ground disturbance have the potential to adversely impact water resources in terms of both quantity and quality. During construction there is potential for adverse effects on surface water quality through the potential release of contaminants.

Any development activity in proximity to existing or proposed drainage channels has the potential to impact surface water via the following mechanisms:

- Release of suspended solids into the drainage network, together with any associated contaminants absorbed to the particles;
- Release of contaminated groundwater pumped from dewatered excavations into adjacent drainage channels; and
- Sudden release of 'slugs' of free hydrocarbon products and/or other contaminants within drains or services encountered by construction activities.

8.3. Mitigation

The appointed contractor will be asked to prepare a Work Method Statement along with a Construction Environmental Management Plan (CEMP), which will be submitted to the Local Authority that will incorporate standard pollution prevention measures such as;

- Minimising the potential of runoff by minimising the area over which materials are stockpiled;
- Covering/sealing exposed soil/spoil to reduce silt runoff;
- Preventing spoil from being stockpiled for prolonged periods;
- Controlling carefully the use of cement and concrete;
- Provision of measures to control potentially contaminated surface water runoff from construction activities;
- Provision for the proper storage and handling of all on-site chemicals, fuel and oil, for example away from watercourses and drains with adequate hardstanding and bunding to contain accidental spillage/leakages entering controlled waters;
- Ensuring that appropriate consents/licences are obtained in accordance with relevant legislation.

With the adoption of the mitigation measures listed above, the Scheme is unlikely to have any significant effects on water quality.

9. Waste & Ground Conditions

9.1. Baseline Conditions

A generic quantitative risk assessment (GQRA) has been undertaken with reference to the site-specific data obtained as part of the March 2022 ground investigation. An assessment of risk has been undertaken using precautionary Generic Assessment Criteria (GAC), that represent minimal or tolerable risk, relevant to the Potential Contaminant Linkages (PCLs). Based on identified on-site and off-site human receptors under the current and proposed land use soil data have been screened against GAC deemed protective of a public open space (residential) land use.

Two exceedances of the GAC were identified which were noted as Lead within GBBH05 at 1m, and Aromatic TPH within GBH03 at 0.5m.

Visual observations of potential contamination were identified along the proposed route for the works during the 2022 site investigation, with the report also highlighting historical and current potentially contaminative activities on-site, and off-site sources that could migrate within the site. Multiple areas of made ground have been highlighted including the construction area of the existing culvert, and the south-western boundary of the Ysgol Carreg Hir site which is discussed below. Due to close vicinity with the highway, there are risks of exhaust contaminants from road traffic and a range of organic or inorganic contaminants within the shallow soils of the playing fields. Off-site sources include the unknown provenance associated with nearby construction, the proximity to the cemetery, and surface water runoff from the road network and playing fields. Visual observations of potential contamination comprised of fine to coarse gravel, rare fine to medium coal ash gravel, varying amounts of cobble content of slag from rare to low. They also include low cobble content of slag and fine to coarse ash and slag gravel in multiple boreholes between 0.15 and 0.8m. There was no olfactory evidence of contamination reported from the site investigation. Volatile organic compounds (VOCs) with the largest value being detected within GBBH03 between 0.07 and 0.12m below ground level, a reading of 7.2 parts per million was identified.

At Ysgol Carreg Hir, the proposed route of the culvert will pass through three areas of ground that were remediated with clean landscaped material along the south-western and western boundary of the site. These areas cap pockets of ground containing asbestos fibres and waste material following the demolition of the old school. Made Ground and positive asbestos results have been collected in these areas of the site up to 1.0 m below ground level. It has been assumed that the culvert will be installed at a depth greater than these areas in which asbestos was found and below level of the clean capped materials. It is recommended that measures are implemented for the proposed works in accordance with Control of Asbestos Regulations 2012 (CAR2012) and CL:AIRE Definition of Waste Code of Practice (DOWCOP) and general accordance with the contractors risk assessments and method statements.

Based on the investigation and assessment, the overall contamination risk associated with the site is considered to be low to human health, controlled waters, property and ecological receptors under the current and future end use.

9.2. Potential Significant Effects

Construction

The proposed Scheme may cause physical effects associated with stripping of topsoil, vegetation clearance, earthworks, temporary stockpiling of materials and construction of new infrastructure. There is likely to be a temporary increase in soil erosion with the potential for increased runoff during earthworks, carrying a high sediment load to affect surface water receptors. However, mitigation measures will be incorporated into the Scheme design and during the construction works and will reduce potential impacts from soil erosion and runoff.

Impacts associated with Land Contamination are therefore anticipated to be temporary and slight adverse which is considered to be not significant.

Operation

Effects associated with Land Contamination

Impacts in relation to physical effects are considered to be mainly related to the construction phase. During operation, there will be limited impacts on soil erosion, ground stability and soil compaction through maintenance operations. Suitable design and subsequent construction works will also minimise physical effects and the Scheme will be operated in accordance with the relevant regulations and Best Practicable Measures. Impacts associated with physical effects are therefore anticipated to be slight beneficial and not significant.

Effects associated with Waste Soils and Soil Reuse

The Scheme may generate waste soils. However, less impact is envisaged during operation in comparison to construction, as material use, and waste soils will be primarily limited to maintenance activities. The Scheme will be operated in accordance with the relevant regulations, best practice guidance and pollution prevention. Impacts associated with physical effects are therefore anticipated to be neutral and not significant.

9.3. Mitigation

Mitigation measures assumed to be incorporated into the construction process include:

- Minimising the area and duration of soil exposure and timely reinstatement of vegetation or hardstanding to prevent soil erosion and reduce temporary effects on soil compaction;
- Stockpile management to reduce soil erosion, windblown dust and surface water run-off;
- Undertaking health and safety risk assessments, method statements and appropriate PPE for the protection of construction workers;
- Implementation of appropriate dust suppression measures to prevent migration of contaminated dust;

If any unknown contamination is discovered during the works, the contractor shall ensure works stop immediately, isolate the affected area or segregate the affected material (if already excavated) if it is safe to do so. Following which a contaminated land specialist will be consulted.

10. Archaeology and Built Heritage

10.1. Baseline Conditions

A desktop search was undertaken to assess the archaeological designations in the area. The desktop revealed that there is a Scheduled Ancient Monument (Carreg Hir) located within the grounds of the Ysgol Carreg Hir Primary School. As part of the school redevelopment (application ref: P2016/0633 & P2017/0248) a separate scheduled monument consent was required due to impacts of the development on the above ground standing stone, which was granted in August 2016 by the Welsh Government. The exact location of the stone might have changed due to redevelopment of the school.

There is an Historic Park and Garden (Policy SP21/4(b) in the NPTCBC Local Development Plan, adopted 2016) at Jersey Park, and the Ynysymaerdy Railway Incline is a Scheduled Monument.

10.2. Potential Significant Effects

The Scheme could potentially affect cultural heritage as follows:

- Impact of temporary above ground works near Carreg Hir on the setting of the Scheduled Monument;
- Temporary impacts of some elements of the Scheme on the setting of the Historic Park and Garden and on The Incline Scheduled Monument during construction e.g. excavation of Ynysymaerdy Road to replace the culvert, and the presence of a site compound at Briton Ferry Woods car park;
- a direct impact from works alongside Rhodfa Clarke Footpath on The Incline Scheduled Monument;
- direct impact of the proposed flood bund on the Jersey Park Historic Park and Garden and the impact on the setting of The Incline Scheduled Monument including impacts arising from vegetation clearance; and
- direct impact on the Historic Park and Garden and on The Incline Scheduled Monument as a result of excavation to create an attenuation pond and a new section of watercourse in Jersey Park including impacts arising from vegetation removal.

Due to the limited duration, scale and/or nature of the works described in the bullet points above, and provided appropriate reinstatement of landscaping takes place, none of the identified impacts are likely to be significant.

Any potential impacts upon archaeology or cultural heritage assets will be managed by implementing best practice working methods on site. An archaeological watching brief is likely to be required during the excavation works.

For the works affecting the two Scheduled Monuments (Carreg Hir, Ynysymaerdy Incline) it is anticipated that separate applications for Scheduled Monument consent will be required from the Welsh Government.

11. Biodiversity

11.1. Baseline Conditions

The information provided in this section is based on the following sources:

- Ecological Surveys undertaken in July 2022 in relation to the present Scheme including:
 - An ecological desk study, using the South East Wales Biological Records Centre (SEWBRc) database.
 - A review of available designated sites information was also undertaken within 2km of the site for internally and nationally designated sites and within 1km for locally designated site
 - Bat activity surveys, including manual transects and static detector deployment
 - Dormouse nest tube surveys

11.1.1. Statutory and Non-Statutory Designated Sites

There is one designated site within 2km of the site;

- Earlswood Road Cutting and Ferryboat Inn Quarries Site of Special Scientific Interest (SSSI). This is located approximately 1.5km south-west of the site and designated for geological features and ancient river systems

There are four locally designated sites located within 1km of the site:

- Eaglesbush Valley local nature reserve, located approximately 1km north-east of the site;
- The River Neath is a Sites of Importance for Nature Conservation (SINC) located 1km west of the site;
- There is an ancient semi-natural woodland to the south;
- There is also a restored ancient woodland located within the vicinity of Jersey Park to the south and adjacent to the above.

There are five SINC's within 1km (distance from centre of site in brackets);

- Neath Canal (984m)
- Giant's Grave (899m)
- Shelone Woods (926m)
- Garth Mor (370m)
- The Waun, Cimla (713m)

11.1.2. Habitats

A Phase 1 habitat survey was undertaken in July 2022, this followed a previous Phase 1 survey was undertaken in 2019. Notable floral species and invasive non-native species were recorded within 1km of the Site.

11.1.3. Species

11.1.3.1. Bats

Records of bat species within 1km of the site were identified. The Phase 1 Habitat Survey identified Elm trees located within the rugby and cricket grounds which has potential roost features for bats. The trees on The Incline have features with bat roosting potential and this area of site presents a linear feature with limited lighting / light spill for commuting and foraging bats. Further, the scrub lined fencing offers potential commuting routes with the wider area offering opportunities for foraging. Jersey Park has potential for roosting and commuting and foraging for bats. Therefore, there are areas with isolated pockets of favourable habitat despite the area of the site proposed for works predominantly being urbanised and less favourable to all but light tolerant bats species. While anthropogenic influence on the suitability of the area must be considered, The Incline and the area north-west near the railway have potential for light tolerant bat species. Therefore, the site is considered to have at least **local** importance for bats.

11.1.3.2. Water Vole

Water Vole was identified as part of the desk study. However, the Phase 1 survey revealed no apparent opportunities for burrows or evidence thereof (no field signs such as but not limited to 'gardens', droppings, characteristic feeding evidence, burrows, or runs). There is little connectivity to wider areas and the majority of the site is situated within a highly urbanised setting with few opportunities for foraging or areas for water vole to reside/rest. While it is acknowledged that water vole use a wide variety of foodstuffs, no notable aggregations of the preferred species were found during the survey. Therefore, it is considered that the Site is of negligible importance for water voles.

11.1.3.3. Breeding Birds

The Site has a variety of potential breeding habitat for more common and widespread bird species as well as a variety of foraging opportunities. There are opportunities for the site to be used by small (likely) non-breeding populations and as such the Site is considered to have local importance for birds. Nevertheless, it should be noted that the Site is part of a wider mosaic, particularly with regards to areas surrounding The Incline and where potentially functionally linked to the River Neath.

11.1.3.4. Reptiles

Reptiles within 1km of the site were identified. The majority of the site is considered to have some degree of suitability to support reptiles or amphibians. However, there are few examples of basking or foraging grounds and little in a way of potential or suitable hibernacula. The site has open water channels of culvert suitable for water vole. However, there is little connectivity to wider areas in addition to being in a highly urbanised setting with few opportunities for foraging or areas to reside/rest due to the nature of the culvert. While the variety of foodstuffs consumed by water vole is appreciated, few examples were found in areas with potential.

11.2. Potential Significant Effects

11.2.1. Construction

11.2.1.1. Habitats

There are no designated sites within the site area and none of those identified by the desk study would be affected by the current construction proposals. The development proposals in their current form would not result in the permanent loss of the habitats within the site boundary. The impact upon scrub, parkland scattered trees, and mixed semi natural woodland trees would have a magnitude of slight negative resulting in a neutral ecological significance of impact at the local level only.

11.2.1.2. Bats

During construction there is potential of effect upon habitats on Site that would reduce the extent of available foraging habitats for bats resulting in a magnitude of slight negative.

Overall, the potential impact on bats would be slight negative in magnitude resulting in a slight adverse ecological significance of impact.

11.2.1.3. Otter

No actual or potential holts or resting Sites were identified on Site at the time of the surveys and as such impacts on such features are not anticipated.

Depending on the construction requirements, direct impacts on otters may occur should they utilise the Site during the works, particularly if there are excavations left open overnight as these could result in trapped or injured animals. There may also be indirect impacts depending on the construction methodologies, particularly in terms of light and noise pollution. However, given the location of the Site within a residential or railway area it is anticipated that this would be carefully managed. As such these construction impacts would be of a slight negative magnitude.

Overall, the potential impact on otters would be slight negative in magnitude resulting in a **neutral** significance of impact. It should be noted that this would increase should active holts be found on site prior to or during the work

11.2.1.4. Breeding and Non-Breeding Birds

There is potential for the construction phase to reduce availability of habitats for both breeding and non-breeding birds resulting in a slight negative magnitude. Clearance of these areas, though likely to be minimal in duration, could also result in direct mortality, injury, or disturbance to birds, particularly if clearance is to be undertaken during the breeding season (late February to early September inclusive, weather dependent).

Indirect impacts are also dependant on the construction methodologies, particularly in terms of noise pollution and disturbance of adjacent retained habitats, and particularly during the breeding season when bird species are more sensitive to indirect impacts. As such these construction impacts would be of a slight negative magnitude.

11.2.1.5. Badger

No actual or potential active setts were identified on Site at the time of the surveys and as such sett impacts are not anticipated.

Depending on the construction requirements, direct impacts on badgers may occur should they utilise the Site during the works, particularly if there are excavations left open overnight as these could result in trapped or injured animals. There may also be indirect impacts depending on the construction methodologies, particularly in terms of light and noise pollution. However, given the location of the site within a residential area and railway area it is anticipated that this would be carefully managed. As such these construction impacts would be of a slight negative magnitude.

Overall, the potential impact on badgers is considered to be slight negative in magnitude resulting in a **neutral** significance of impact. It should be noted that this would increase should active setts be found on Site prior to or during the work.

11.2.1.6. Fish

In channel works could cause impacts to migratory species through noise or vibration and should be restricted to outside the Natural Resources Wales embargo period of October 15th to May 15th (i.e., works permitted between May 15th and October 15th subject to further survey). Therefore, it is considered that the impact would be **negligible** in terms of magnitude.

Indirect construction impacts would be limited to light pollution effects if night works occurred which are currently unanticipated or noise. This would be **negligible** in magnitude as no work requiring artificial lighting are currently considered.

Overall, the potential impact on fish would be **negligible** in magnitude and therefore neutral in terms of significance.

11.2.2. Operation

11.2.2.1. Habitats

The operation phase is not anticipated to have any additional impacts on any of the habitats identified as there would be no significant change in the type or level of Site use.

11.3. Mitigation Measures

11.3.1. Construction

11.3.1.1. General Construction Measures

Potential indirect construction impacts on protected species would largely be mitigated through the implementation of the following measures and governed by the development of specific method statements (with prominence of appropriate best practice for protected species on Site), the production and implementation of a suitable pollution and sediment management plan, and associated toolbox talks to guide Site operations.

While clearance works is currently proposed to be kept to a minimum, best practice would include, but not be limited to:

- A precautionary method of works adopted with clearance following a two-staged approach following full ecological checks with a first cut of vegetation to 150mm (300mm for woody species). Subsequent levels of clearance would follow detailed ecological checks. Arisings would be removed from Site or used to develop habitat piles in agreed retained areas.
- Clearance would be undertaken during seasonally appropriate times that accord with the ecological receptors present on Site e.g. works being undertaken during the active reptile season (April to End of September dependent on weather and temperature) despite the conflict with the nesting bird season as the latter can be mitigated for by ecological checks.
- Removal of trees will adhere to BCT guidance for potential bat roosts.
- All works will be subject to a pre work check by a suitably experienced ecologist for protected species including for nesting birds, otter, water vole, badger, reptile and amphibian, bat, and any other potential or highlighted species (as encapsulated in the site-specific method statement and tool box talks).
- Works near trees will avoid root protection zones.
- Use of directional and low-level lighting to reduce additional light spill into retained and adjacent habitats.
- Careful consideration of working methodologies to minimise noise and vibration impacts, particularly during more sensitive period such as breeding, hibernation, and migration seasons
- Works during the time of the migratory fish embargo (15th October – 15th April) in close proximity to the water bodies will be restricted unless agreed with the county ecologist.
- Closure or covering of any excavations overnight to prevent trapping or injuring animals. Where this is not possible, excavations should be fenced off and a means of escape provided.
- Restrictions on night-time working particularly within proximity to trees. Careful placement of site compounds, storage, lay down areas etc. to ensure connectivity for protected species is maintained where possible and use of noise barrier fencing to reduce noise impacts within retained habitats
- Use of secure and clearly identified barrier fencing to prevent accidental encroachment into retained/adjacent areas
- Clear identification of access routes into and through the construction site, maximising the use of existing access roads and other hard standing areas already present.
- Implementation of appropriate material and waste management plans including contingency and emergency measures and avoidance of re-fuelling and parking of vehicles close to watercourses wherever possible
- Use of dust suppression measures as and when appropriate and provision of spill kits close to high-risk areas for rapid deployment in the event of a pollution event.
- Involvement of an Ecological/Environmental Clerk of Works during clearance and construction works to identify and address other risks as and when they arise.

11.3.1.2. Habitats

No direct impacts have been identified on the designated sites and therefore mitigation measures would not be required.

11.3.1.3. INNS

An Invasive Non-Native Species Management Plan would be produced to cover the clearance works, construction and post construction periods. This management plan would include appropriate methodologies for vegetation clearance, soil excavation and disposal, and ongoing management during and post construction. The methodologies to be applied would depend on the work required and the level of disturbance associated with these.

There are notable stands of INNS within the site, most notably surrounding the railway and along the railway line itself. A deliberate and specific method statement is recommended to be undertaken by contractors qualified to do so in accordance with Welsh government advice. Wider site works should adhere to specific biosecurity measures to reduce the potential for spread of these species. This would include (but not be limited to); the use of specialist contractors, wheel wash / brush down areas, area specific working, and methods to control the spread via the watercourses. It is recommended that the county ecologist is consulted prior to works with regards to these species.

11.3.1.4. Bats

As no bat roosts have been identified on Site, a European Protected Species licence would currently not be required. However, appropriate measures would still be implemented

11.3.1.5. Breeding and Non-Breeding Birds

The potential impact resulting from the loss of potential breeding and non-breeding bird habitats, although at present anticipated to be minimal, would be mitigated through the measures proposed

Ideally, vegetation clearance would take place outside the bird nesting season (late February to early September inclusive, weather dependent). However, clearance works need to consider the sensitivity of other species and the overall construction programme, therefore a staged approach is to be taken in relation to the higher risk habitats. This approach would follow the procedure recommended for reptile clearance incorporating a nesting bird check (including ground nesting birds). Here, the first cut of vegetation would be to no less than 150mm following ecological checks and under a full ecological watching brief, with all arisings removed. The second cut of these areas would take place again under a full ecological watching brief.

Should breeding birds be present, a minimum no-works buffer of 10m radius (species dependent) should be established around the nest location. This buffer should be kept in place until such time as the young have fledged, and the nest has been confirmed as inactive by a suitably experienced ecologist

11.3.2. Operation

Due to the nature of the works little operational impacts are anticipated.

11.3.3. Biodiversity Opportunities for Ecological Enhancements

Implementation of ecologically sensitive management regimes should be applied where possible to provide ecological enhancement during this phase. This is of particular note in The Incline which has the potential as a good ecological resource when considered within the context of the wider habitat. Enhancements here could include bat boxes on retained trees (to be monitored by a suitably licenced bat worker) and 2 bird boxes suitable for tit species for both enhancement and to limit the use of bat boxes by these species.

- Retained amenity grassland habitats could be enhanced for ecological purposes, if possible, through a reduction in the management frequency and implementation of more ecologically sensitive management techniques, such as: Infrequent cutting regimes using low ground pressure machines and removal of arisings.
- Cutting regimes designed to leave a taller sward and timed to encourage natural wildflower establishment, allowing the setting of seed.
- Turf removal to create bare areas permitted to naturally recolonise from the local seed bank, with only light grass seeding where necessary to accelerate cover.

11.4. Scope of Assessment

The proposed Flood Alleviation Scheme is not considered to be EIA development in regard to likely ecological impacts.

An Ecological Impact Assessment (EclA) has been undertaken to assess the impact of the proposals on the Site's biodiversity during construction and operation. Measures will be detailed to avoid and minimise adverse ecological effects, and habitat compensation/creation will be proposed with the aim of increasing the Site's biodiversity post-construction and throughout its operational life

The EclA has detailed mitigation measures to be undertaken to both protect habitats and species and comply with nature conservation legislation. It is considered that with the implementation of mitigation measures, the proposed flood alleviation scheme would not result in significant residual impacts on biodiversity.

12. Conclusions and Recommendations

The report provides information to support the request for a Screening Opinion from NPTCBC, under Regulation 6 of the Town and Country Planning (Environmental Impact Assessment) Regulations 2017, as to the potential need for an Environmental Impact Assessment (EIA) for the flood alleviations works at Grandison Brook.


The assessments provided in sections 5-11 provide a thorough evaluation of the potential impacts of the Scheme, concluding that following the implementation of the identified mitigation measures, the 'residual' environmental effects of the Scheme would not be significant.

It is respectfully requested that NPTCBC, provides an EIA screening opinion on the potential environmental impacts of the Scheme.



Appendices



Appendix A. Location Plan

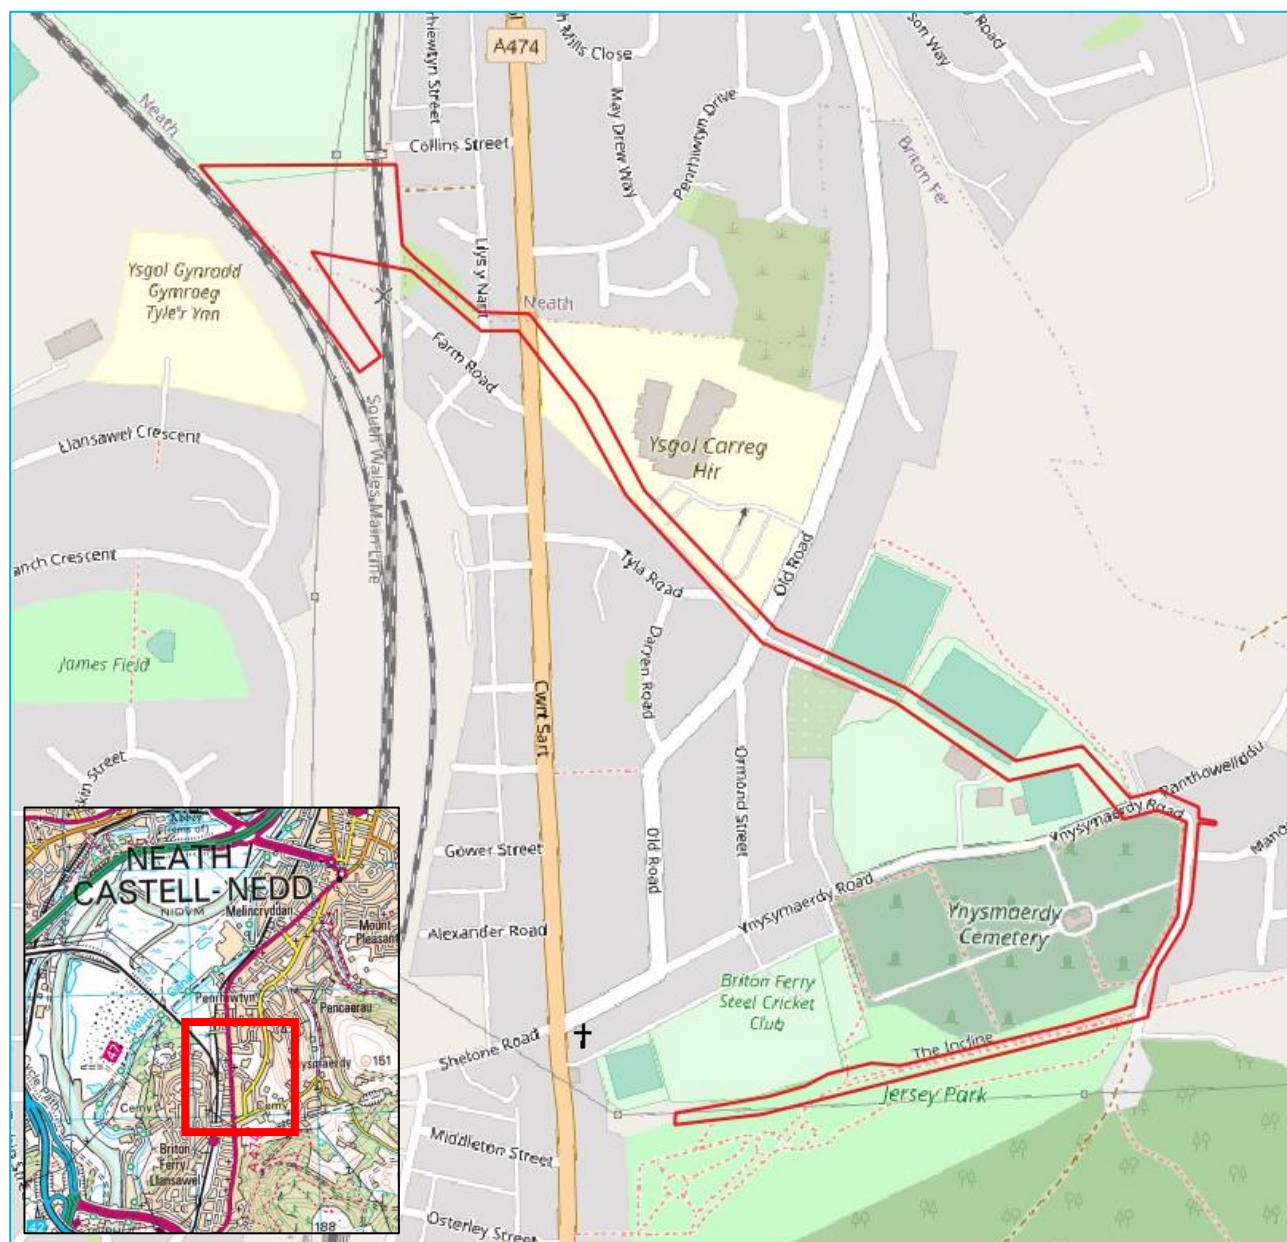

Appendix B. Proposed Scheme Overview

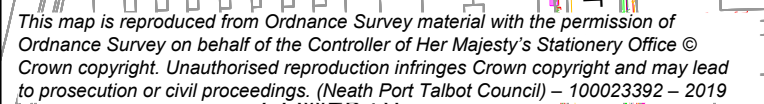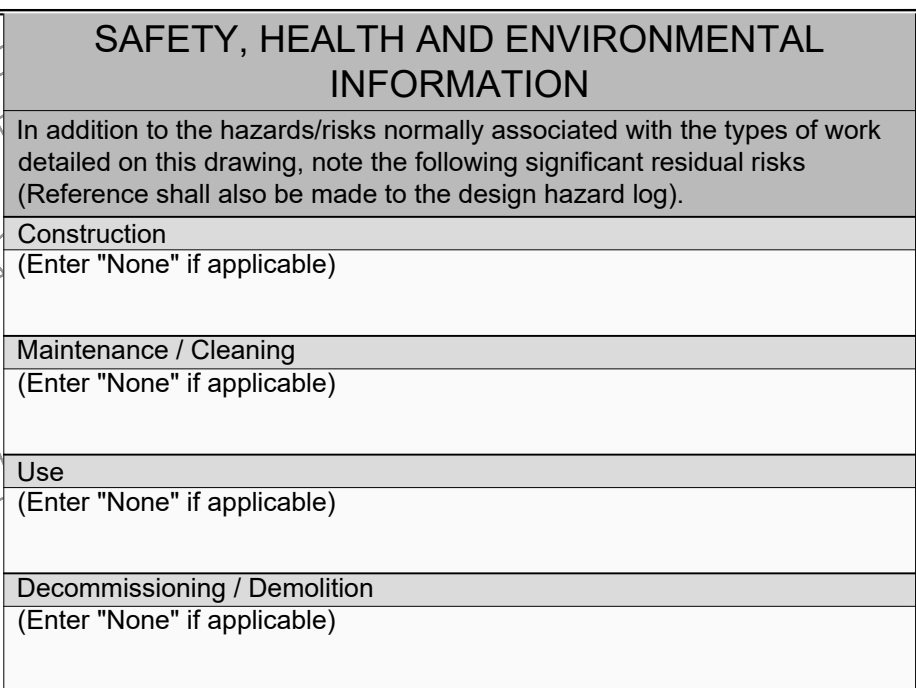

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. ALL LEVELS ARE IN METRES ABOVE ORDNANCE DATUM UNLESS OTHERWISE NOTED.


- - - - Neath Port Talbot Borough Council - Drainage
 ■ Neath Port Talbot Borough Council - Gully
 - - - - Dwr Cymru Welsh Water - Sewerage
 - - - - Dwr Cymru Welsh Water - Water

Drawing Suitability	Status
WORK IN PROGRESS	S0
 SNC • LAVALIN ATKINS Member of the SNC-Lavalin Group Copyright © SNC Lavalin (2019)	West Glamorgan House 12 Orchard Street Swansea West Glamorgan SA1 5AD Tel: +44 (0)1792 641172 Fax: +44 (0)1792 472019 www.atkinsglobal.com
Client	
 NEATH PORT TALBOT COUNTY BOROUGH COUNCIL	

Project Title		GRANDISON BROOK			
Drawing Title					
PROPOSED SCHEME OVERVIEW SHEET 1 OF 2					
Drawing Number					
Project	Originator		Volume		
NE05_001 - ATK - GEN -					
SWMWREC - DR - CD - 000001					
Location	Type		Role	Number	
Original Size:	A1	Scale:	1:1250	Project Ref. No:	5192793
		Sheet:	1 of 1	Rev:	P01.1

DO NOT SCALE


100
0 10
Millimetres

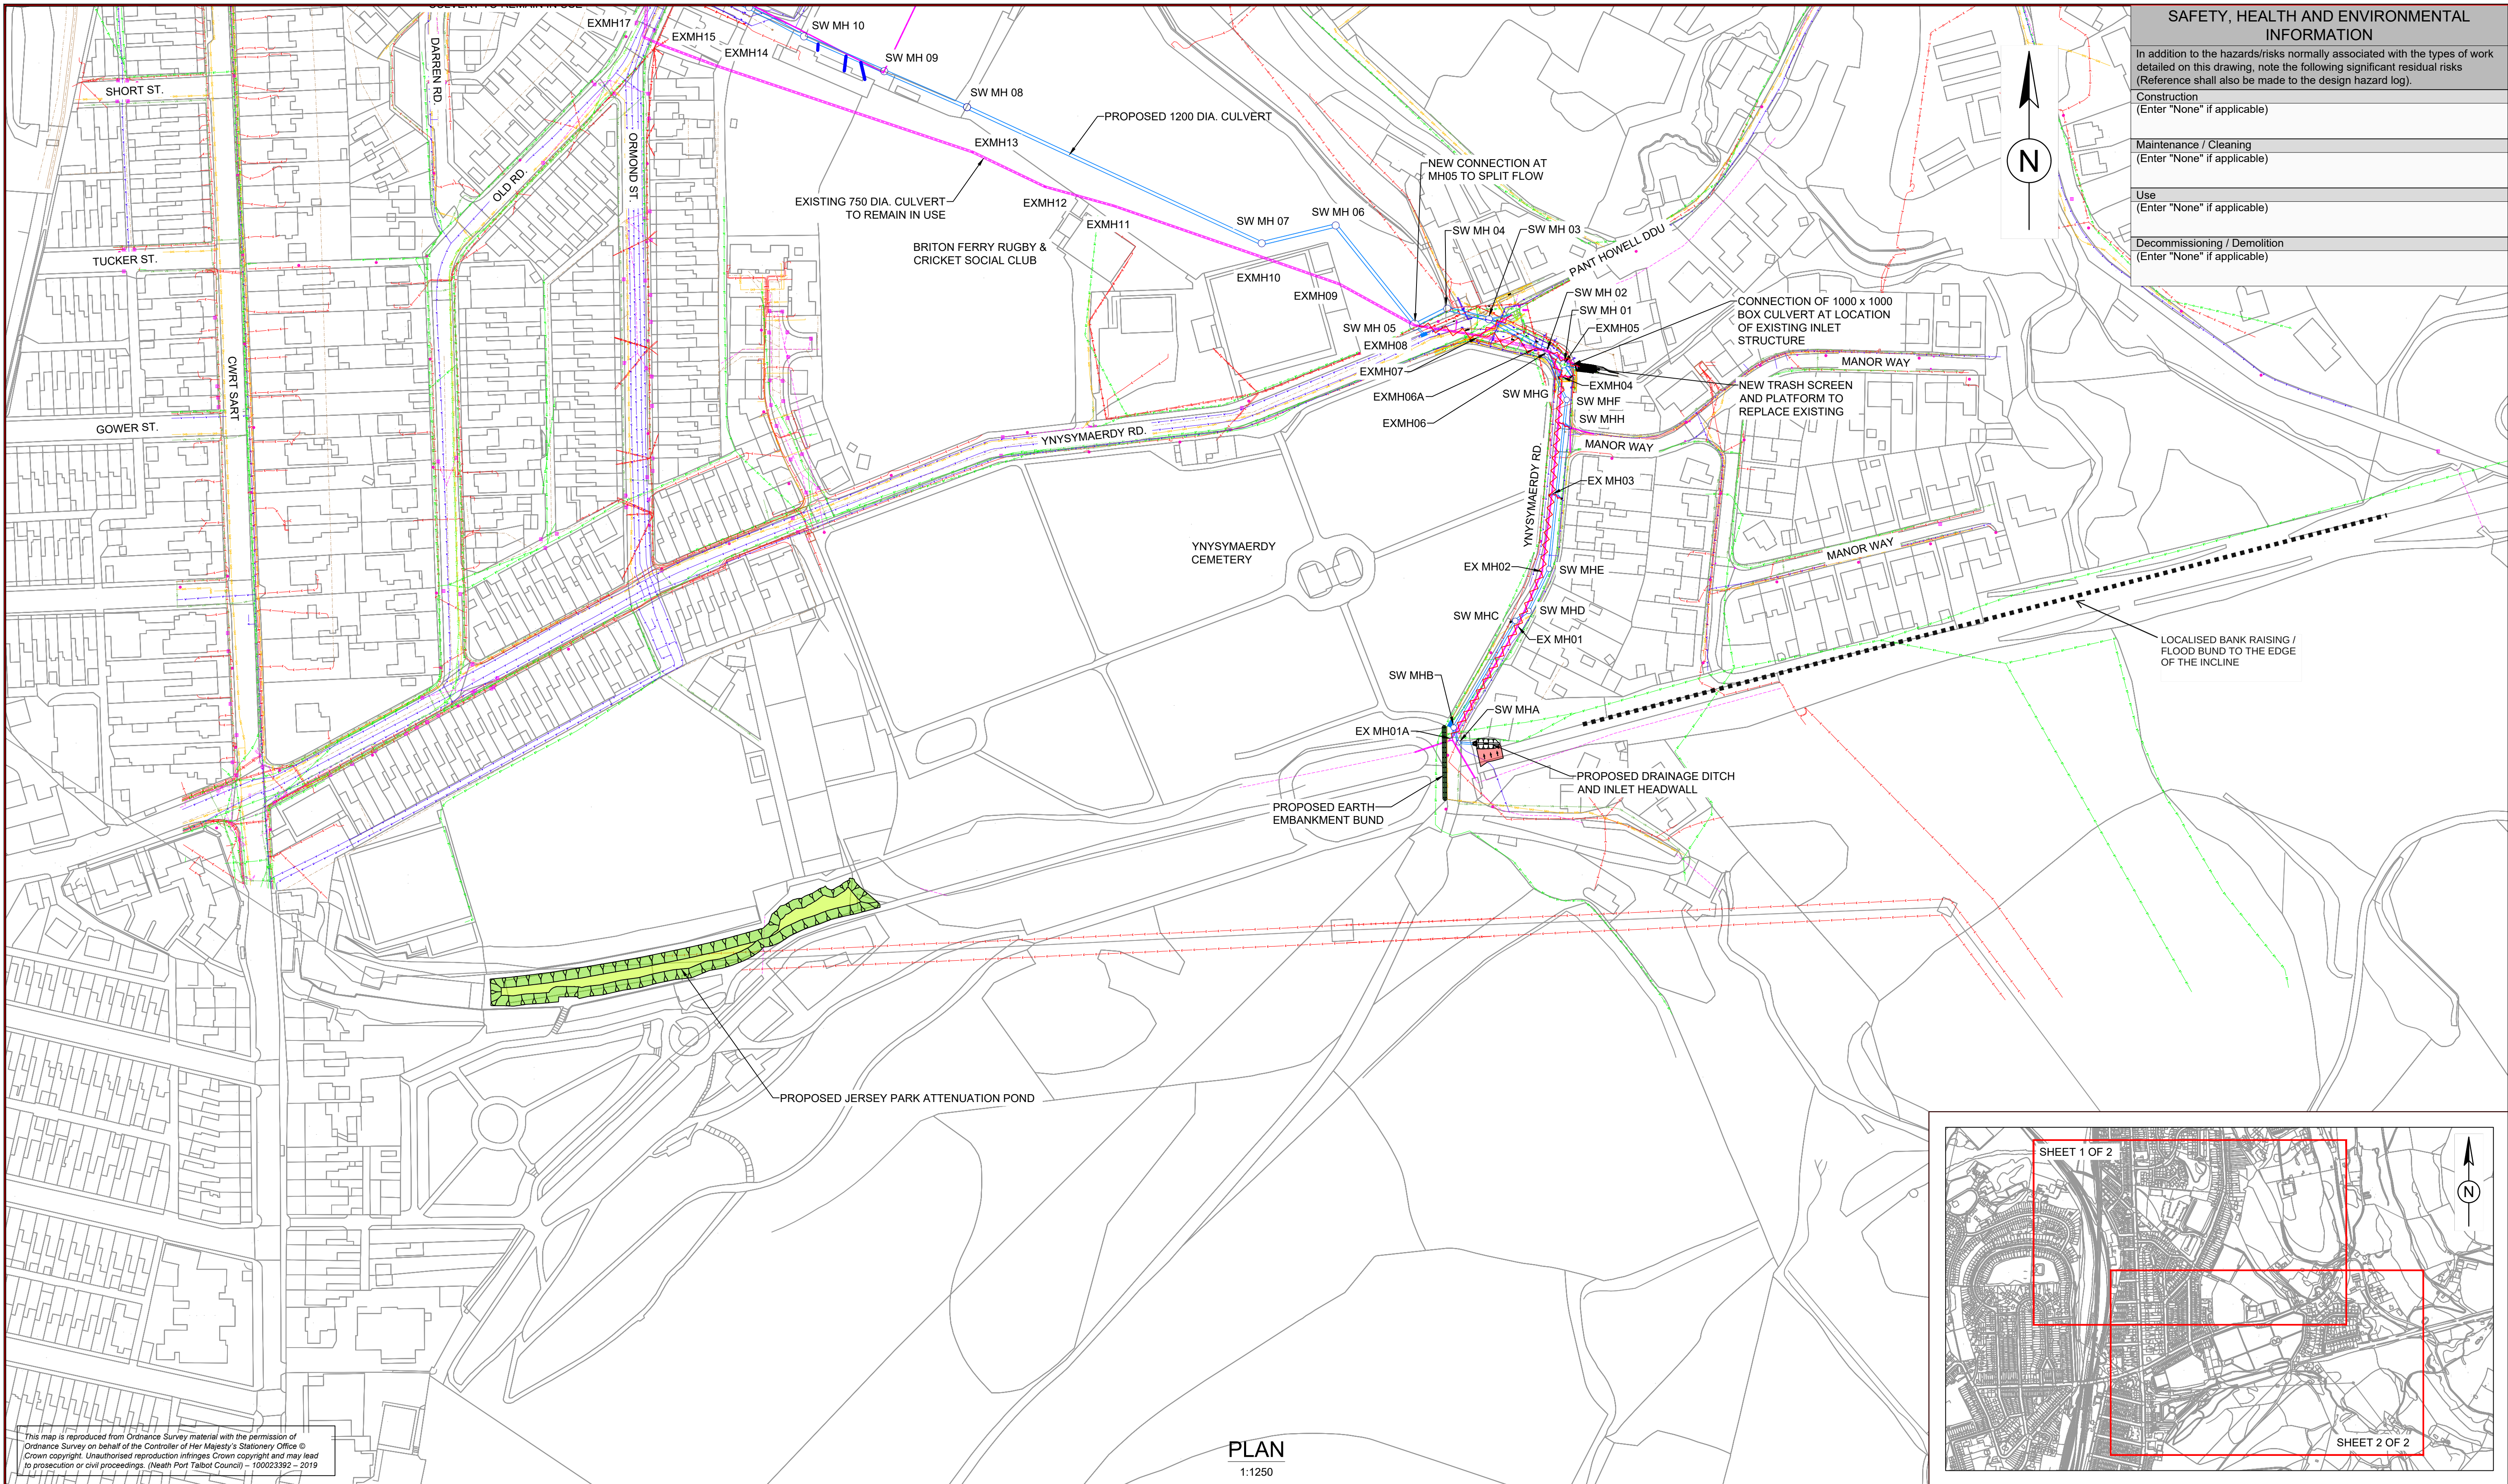

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION	
In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following significant residual risks (Reference shall also be made to the design hazard log).	
Construction (Enter "None" if applicable)	
Maintenance / Cleaning (Enter "None" if applicable)	
Use (Enter "None" if applicable)	
Decommissioning / Demolition (Enter "None" if applicable)	

This map is reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. (Neath Port Talbot Council) – 100023392 – 2019

PLAN
1:1250

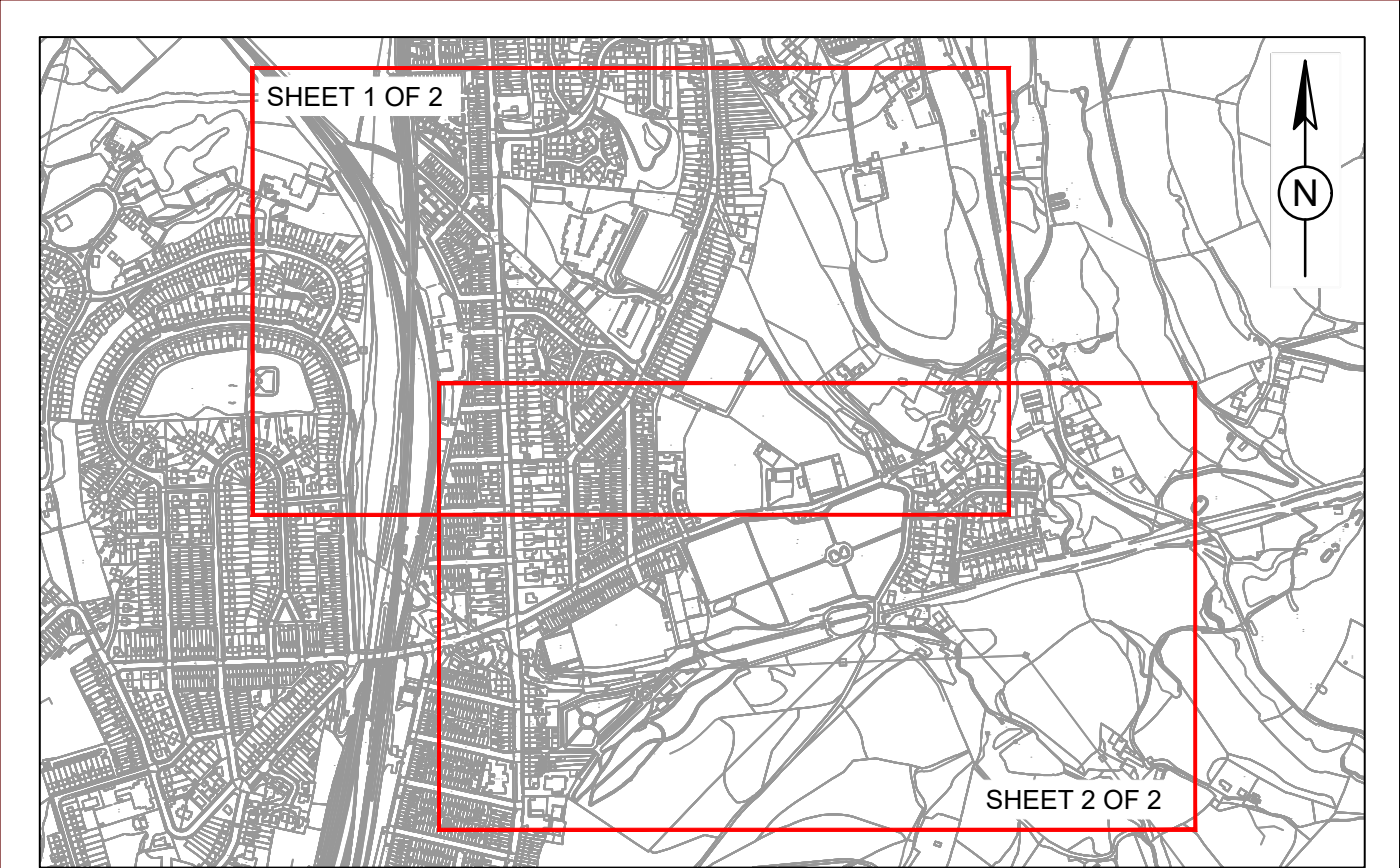

NOTES

- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
- ALL LEVELS ARE IN METRES ABOVE ORDNANCE DATUM UNLESS OTHERWISE NOTED.

DRAINAGE SERVICES LEGEND

- Neath Port Talbot Borough Council - Drainage
- Neath Port Talbot Borough Council - Gully
- Dwr Cymru Welsh Water - Sewerage
- Dwr Cymru Welsh Water - Water

Description						
Status	Revision	Drawn	Checked	Reviewed	Authorised	Issue Date
Description						
Status	Revision	Drawn	Checked	Reviewed	Authorised	Issue Date
Description						
Status	Revision	Drawn	Checked	Reviewed	Authorised	Issue Date
Description						
Status	Revision	Drawn	Checked	Reviewed	Authorised	Issue Date
S0	P01.1	---	---	---	---	---

Drawing Suitability		Status	Project Title	
WORK IN PROGRESS		S0	GRANDISON BROOK	
SNC • LAVALIN ATKINS Member of the SNC-Lavalin Group Copyright © SNC Lavalin (2019)		West Glamorgan House 12 Orchard Street Swansea West Glamorgan SA1 5AD Tel: +44 (0)1792 641172 Fax: +44 (0)1792 472019 www.atkinsglobal.com		Drawing Title
Client		NEATH PORT TALBOT COUNTY BOROUGH COUNCIL		PROPOSED SCHEME OVERVIEW SHEET 2 OF 2
Project		NE05_001	ATK	GEN
Location		SWMWREC	DR	CD
Original Size: A1		Scale:	Project Ref. No: 5192793	Sheet: of Rev: P01.1

Atkins Limited
West Glamorgan House
12 Orchard Street
Swansea
SA1 5AD

Tel: +44 (0)1792 641172
Finn.Heberlet@atkinsglobal.com