

- Any proposed substitutions, whether species, cultivar, pot size or other specification, must be approved by landscape architect prior to planting;
- Any significant layout changes necessitating revised details should be reported to the landscape architect;
- All Nursery Stock to comply with BS3936 Part 1:1992 and all subsequent amendments;
- All Landscape operations to comply with BS4428:1989 and all subsequent amendments;
- Native stock to be preferably of local, and at least UK, provenance;
- The landscape contractor to make him/herself aware of any underground services prior to planting.
- Any poor site or soil preparation or conditions to be reported to site manager for remediation prior to planting.
- No substitutions are to be made without prior approval.
- All porposed works to comply with BS5837:2012 Trees in relation to design, demolition and construction

- SOILS
- Site-won soils to be used
 - Great care must be taken to preserve soil quality and integrity; the planting bed must not be tracked over or worked when overly wet; protection of topsoil and subsoil for planting areas should accord with the Construction Code for the Sustainable Use of Soils on Construction Sites (DEFRA, 2009), BS 3882:2015 and BS 8545:2014;
 - Any ground modelling to be to smooth and flowing contours new soil edge to be feathered to marry into adjacent levels;
 - All planting and grass areas to be cultivated, with prior ripping where necessary to relieve compaction if required;
 - Soils allowed to settle prior to planting or seeding.

- TREE PITS
- Tree pits to be excavated to minimum 1m x 1m x depth of rootball. In sloping ground, maintain horizontal bases and vertical sides with no less than minimum depth throughout. If compacted, break up bottoms of pits to a depth with a fork and scarify sides;
 - All tree pits to be back filled with 600mm subsoil followed by 300mm topsoil;
 - Rootballed trees to be anchored underground with Greenleaf Rootball Fixing System and planted with Greenleaf 'Root Rain' watering pipes, fitted according to manufacturer's instructions;
 - Bare root and containerised trees to be anchored with short triple softwood stakes a maximum of one quarter the height of the tree above ground, and fixed with biodegradable hessian ties such as 'Naturetie' available in 30m rolls from GreenBlue Urban.
 - Tree supply, planting and aftercare must accord with BS 8545:2014.
 - No tree will be planted until it has been found to be compliant with Table 1, p.21, BS 8545:2014 – this will be established via inspections on delivery




- Planting bed to receive Green-tech mycorrhizal Root Grow (granules for general planting and root dip for bare root planting), applied according to manufacturer recommendations;
 - Mulch to be dark brown mixed conifer bark of particle size 8-35mm and pH range 5.0-7.0 to BS PAS 100:2005; mulch to be laid to 75mm (settled) depth.
- WATERING
- During establishment and for duration of maintenance period ensure that sufficient water is applied using a hose to maintain healthy growth. During very dry summer spells, trees to be watered at rate of 25L and shrubs at 5L per plant per week during establishment. Draw back mulch and water with hose. Do not use sprays or sprinklers as these just wet the top of the mulch and do not penetrate the root zone.

planting specification

Spacing	ID	No.	Latin Name	Scheduled Size	
as shown	Acam	32	Acer campestre	1+1, 60-80cm	BR, 3 breaks
as shown	Ca-1	130	Corylus avellana	1+2, 80–100cm	BR
as shown	Cm-BR	65	Crataegus monogyna	1+2, 80–100cm	BR
as shown	Lp	32	Lonicera periclymenum	60-90cm, 3L	min 2 breaks, cane removed on planting
as shown	Psp	16	Prunus spinosa	1+1, 60-80cm	BR, 3 breaks
TREE	Qr-ftfhd	3	Quercus robur	12-14cm RB	ftfhd to ground
as shown	Rca	32	Rosa canina	1+2, 80–100cm	BR, 5 breaks in lower third
as shown	Vo	16	Viburnum opulus	1+2, 80-100cm	BR

legend

- existing vegetation including self-sown willow suitable for coppicing
- existing grass
- proposed native woodland planting in mulched and edged bed
- 2no. proposed bird boxes:
Vivara Pro Woodstone house sparrow nest box with two breeding chambers

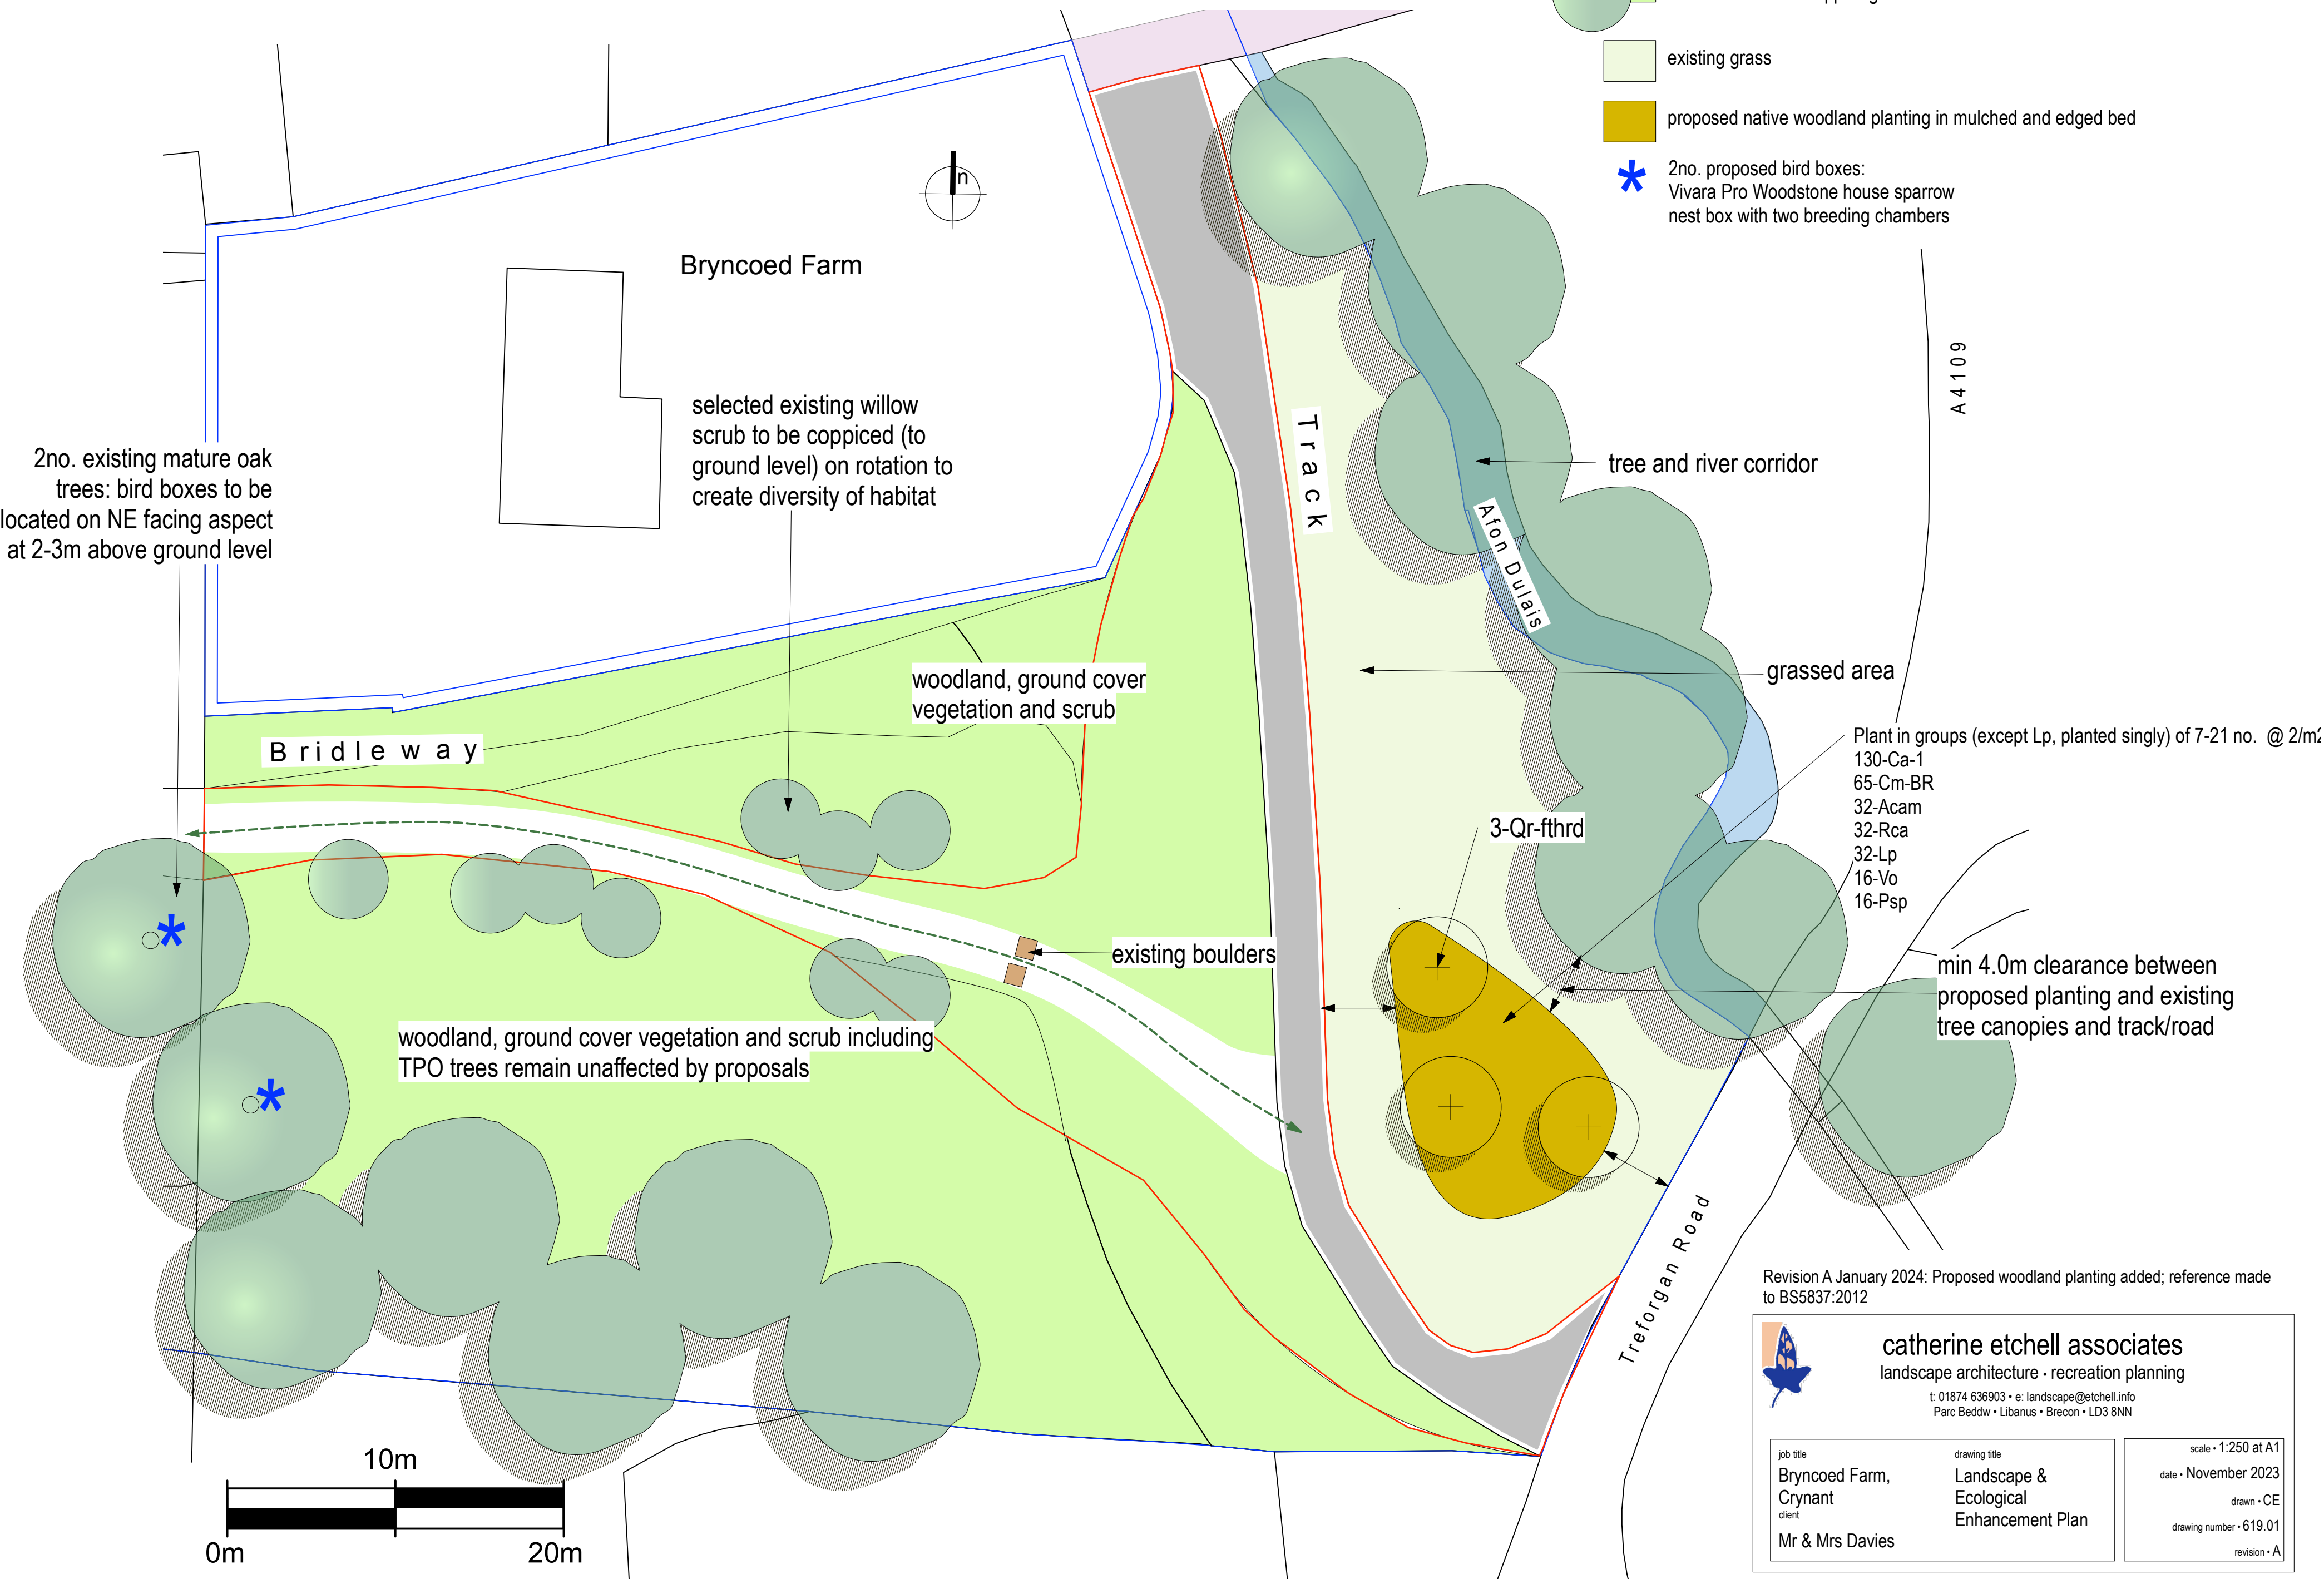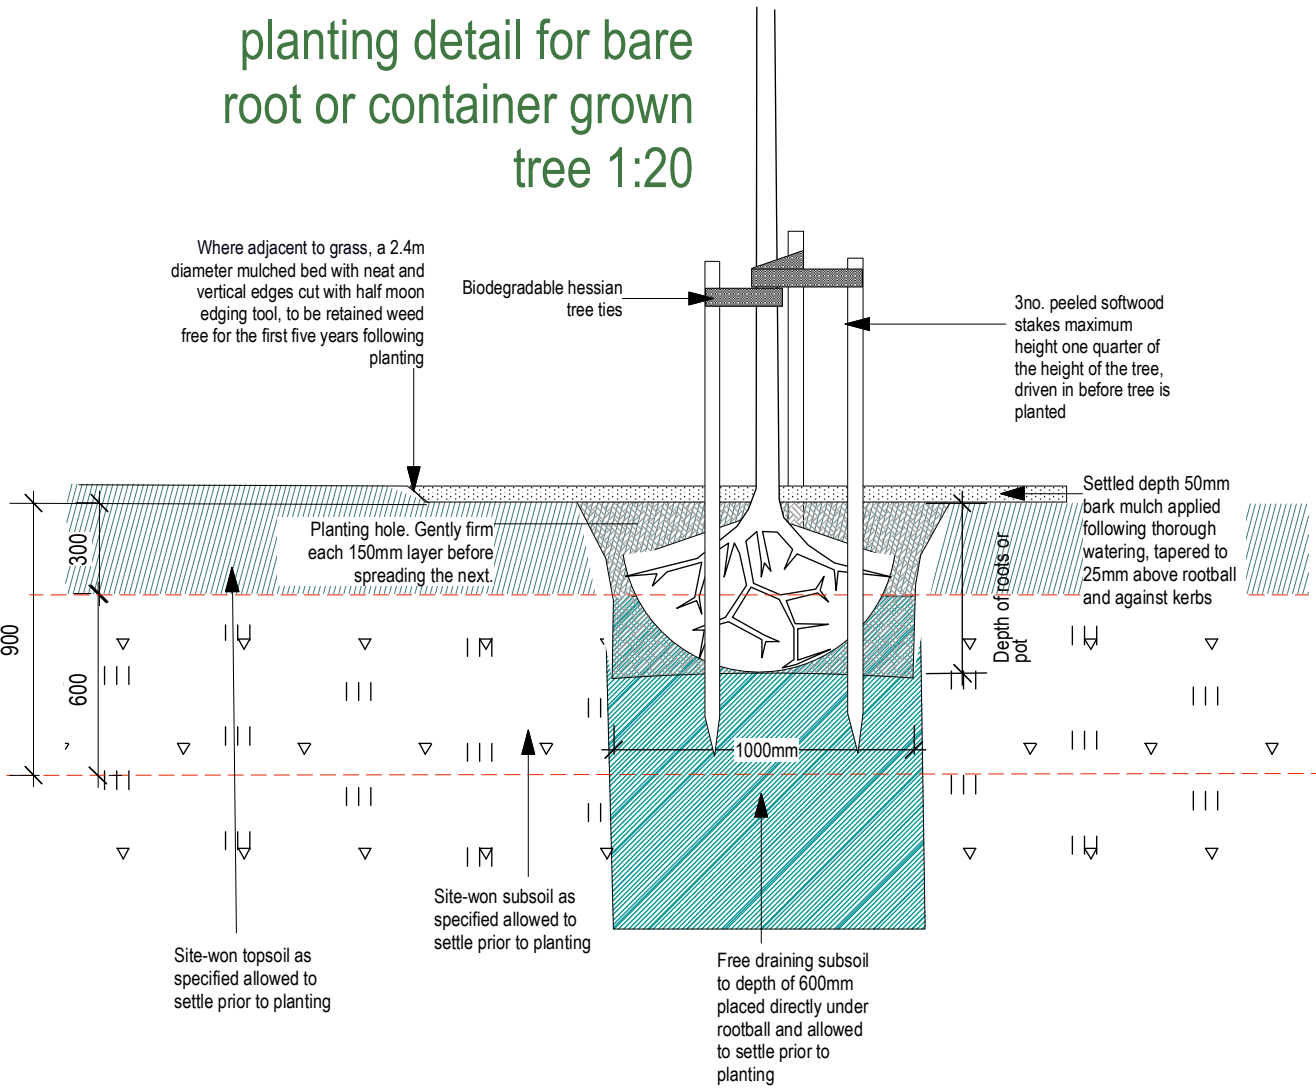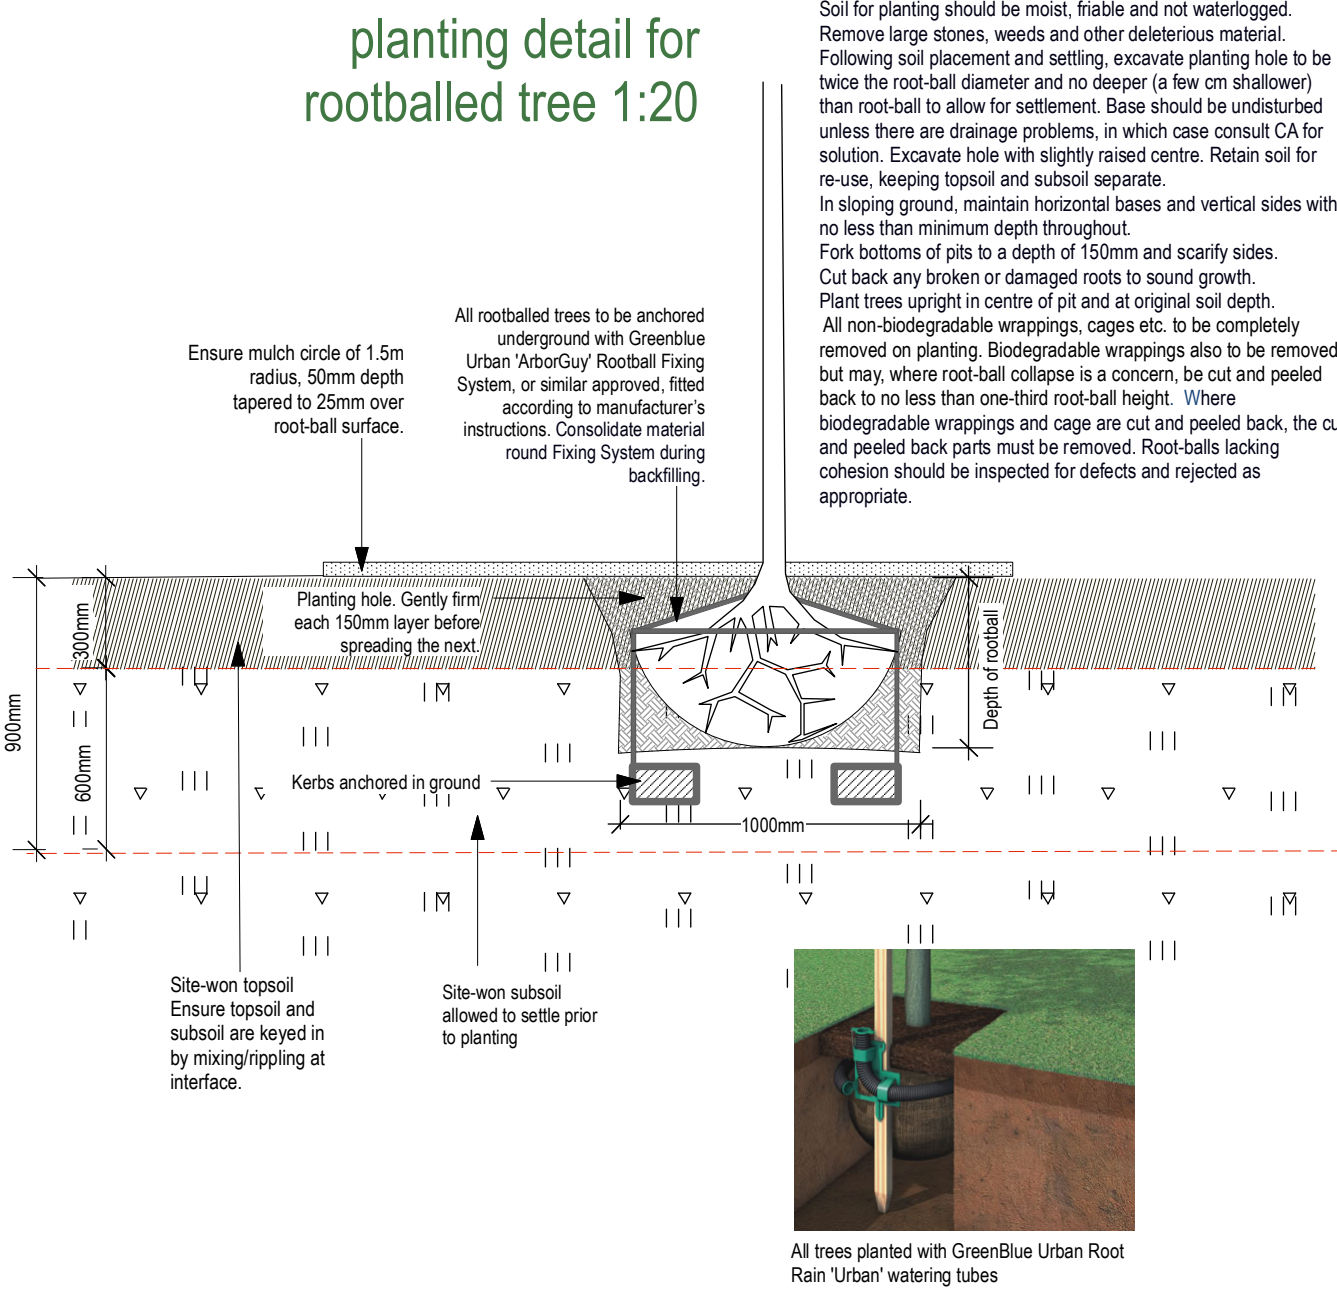

Revision A January 2024: Proposed woodland planting added; reference made to BS5837:2012

catherine etchell associates
landscape architecture · recreation planning
t: 01874 636903 · e: landscape@etchell.info
Parc Beddw · Libanus · Brecon · LD3 8NN

job title
Bryncoed Farm,
Crynant
client
Mr & Mrs Davies

drawing title
Landscape &
Ecological
Enhancement Plan

scale · 1:250 at A1
date · November 2023
drawn · CE
drawing number · 619.01
revision · A