

Chapter 11

Traffic and Transport

Contents

11.1	INTRODUCTION	1
11.2	LEGISLATION, POLICY AND GUIDANCE	1
	Legislation, Policy and Guidance Summary	1
11.3	CONSULTATION	2
	Scoping Direction	2
	Welsh Government Highways and South Wales Trunk Road Agent (SWTRA)	2
	Neath Port Talbot County Borough Council	2
	Bridgend County Borough Council	2
	Pre-Application Consultation (PAC)	2
11.4	TRAFFIC AND TRANSPORT METHODOLOGY	8
	Magnitude of Impact	8
	Screening Test	8
	Receptor Identification	9
	Embedded Mitigation	9
	Assessment of Sensitivity	9
	Assessment of Significance	10
	Impact Mitigation	10
	Uncertainties and Assumptions	10
	Existing Traffic Flows	10
	Traffic Generation	10
	Assessment of Traffic Effects	10
	Assumptions and Limitations	11
11.5	BASELINE TRAFFIC CONDITIONS	11
	Construction Traffic Routes	11
	Abnormal Indivisible Loads	11
	General Construction Traffic	11
	Access Point 1 – Purpose Built Diverge Slip Road from M4 for AIL Deliveries	11
	Access Point 2 – B4282	11
	Access Point 3 – Goytre Road	11
	Road Description	11
	A4107 (Afan Valley Road)	11
	B4282 (Maesteg Road)	12
	A4063 From Tondy to Maesteg	12
	Dyffryn Road / Goytre Road	12

	Baseline Traffic Data	12
11.6	INITIAL SCREENING ASSESSMENT	12
	Quantification of Development Activities	12
	Construction Traffic Generation	13
	Distribution of Construction Traffic	18
	Screening	18
	Magnitude of Impact	19
	Magnitude of Turbine Foundation Concrete Pours	19
11.7	DETAILED ASSESSMENT OF EFFECTS	20
	Identification and Assessment of Receptor Sensitivity	20
	Assessment of Construction Phase Effects	21
	Assessment of Turbine Foundation Concrete Pours Effect	22
	Assessment of Abnormal Load Transportation	22
11.8	MITIGATION	23
	Impact Mitigation	23
	Turbine Foundation Concrete Pours	23
11.9	CUMULATIVE EFFECTS INCLUDING NON-WIND	23
11.10	CONCLUSIONS	24
11.11	MITIGATION AND RESIDUAL EFFECTS	24

Glossary

Term	Definition
Environmental Statement	A document reporting the findings of the EIA and produced in accordance with the EIA Regulations
North section	Section of development located north of Bryn settlement, within Penhydd forestry block.
South section	Section of development located south of Bryn settlement, within Bryn forestry block.
The proposed development	Y Bryn Wind Farm development.
Y Bryn site boundary	The area within which the proposed development will be located.

List of Abbreviations

Abbreviation	Description
AADT	Average Annual Daily Traffic
AIL	Abnormal Indivisible Loads
BCBC	Bridgend County Borough Council
BoP	Balance of Plant
DfT	Department for Transport
DMRB	Design Manual for Roads and Bridges
ES	Environmental Statement
HGV	Heavy Goods Vehicle
IEA/IEMA	Institute of Environmental Assessment (now Institute of Environmental Management and Assessment)
LGV	Light Goods Vehicles
LV	Low voltage
mph	Miles per hour
Natural Power	Natural Power Consultants Ltd
NPTCBC	Neath Port Talbot County Borough Council
PAC	Pre-application Consultation
SCADA	Supervisory cables and data acquisition
SWTRA	South Wales Trunk Road Agent
TAN	Technical Advice Note
TIA	Traffic Impact Assessment
TMP	Traffic Management Plan
WelTAG	Welsh Transport Appraisal Guidance

11.1 INTRODUCTION

- 11.1.1 This chapter of the Environmental Statement (ES) assesses the impacts and potential effects on traffic and transport as a result of the construction of the proposed development.
- 11.1.2 Construction traffic required to construct the wind farm falls into three broad categories; namely Abnormal Indivisible Loads (AILs), Heavy Goods Vehicles (HGVs) and Light Goods Vehicles (LGVs).
- 11.1.3 Natural Power Consultants Ltd (Natural Power) is the author of this chapter and carried out the overall assessment, and Pell Frischmann acted as lead on the AIL route and documentations relating to this route.
- 11.1.4 The construction of the proposed development is expected to last approximately 24 months, from site mobilisation through to installation and commissioning of the turbines, ending with site re-instatement and demobilisation.
- 11.1.5 The following appendices and figure accompany this ES chapter:
- Appendices in Volume 3 of the ES:
 - Appendix 11.1: Preliminary Traffic Management Plan (TMP) (HGVs/LGVs); and
 - Appendix 11.2: AIL TMP.
 - Figure in Volume 2 of the ES:
 - Figure 11.1: Construction Traffic Highways Links.
- 11.1.6 The traffic and transport assessment assesses the traffic impacts associated with the proposed development. The assessment considered two scenarios against baseline traffic conditions:
- Scenario 1 – Expected Construction. This scenario was based on the most likely construction methods, programme and sequencing. This scenario considered stone to be sourced on site and all foundation concrete would be produced at on-site batching plants, stone required for foundation concrete has been assumed to be imported; and
 - Scenario 2 – Worst Case Construction. This scenario is a worst case scenario which assumes the top layer of stone would need to be imported onto site and all foundation concrete would be imported to site in ready mix lorries.
- 11.1.7 In addition to the two scenarios noted above, the traffic impacts associated with the abnormal load deliveries were also assessed. An AIL Route Survey including swept path analysis at particular pinch points has been prepared demonstrating the viability of the proposed abnormal load route.

- 11.1.8 Separate preliminary TMPs for HGVs and AILs are also prepared. The assessment is based on a number of conservative assumptions around the construction programme/sequencing, source of stone and concrete deliveries. These assumptions can only be clarified post consent once the turbine supplier and Balance of Plant (BoP) contractors are engaged. Therefore, it is expected a planning condition will be applied to the development for a final combined construction TMP to be prepared for approval by South Wales Trunk Road Agent (SWTRA), Neath Port Talbot County Borough Council (NPTCBC) and Bridgend County Borough Council (BCBC) post consent and prior to construction works commencing.
- 11.1.9 The assessment concludes that, with the incorporation of suitable mitigation measures secured through a construction TMP there will be no significant traffic effects associated with the proposed development.

11.2 LEGISLATION, POLICY AND GUIDANCE

- 11.2.1 This section outlines the legislation, policy and guidance that has been reviewed. The transport and traffic issues described in the following planning advice and guidance documents is taken into account in this assessment, for full details refer to Chapter 2: Legal and Policy Context of the ES.
- The Wales Transport Strategy (2021), The Welsh Government¹;
 - Planning Policy Wales, Technical Advice Note 18: Transport (TAN 18) (March 2007), Welsh Assembly Government²;
 - Welsh Transport Appraisal Guidance (WelTAG) (2017), Welsh Government³;
 - Guidelines for the Environmental Assessment of Road Traffic (1993), Institute of Environmental Assessment (IEA), now the Institute of Environmental Management and Assessment (IEMA);
 - Neath Port Talbot Council, Joint Local Transport Plan 2015-2020⁴;
 - Bridgend County Borough, Local Transport Plan 2015-2030⁵; and
 - Highways Act (1980)⁶.

Legislation, Policy and Guidance Summary

- 11.2.2 Much of the above policy and guidance deals principally with developments that generate significant increases in travel as a direct consequence of their function (e.g. retail parks, housing, etc.) and measures to implement a more sustainable transport solution. The traffic generated by the proposed development will almost entirely be limited to vehicle movements during the construction phase. As such, the impact of traffic from the proposed development is temporary and of a short-term duration when compared to developments such as retail parks where the traffic impact can be permanent and for a long duration of typically a 60-year design span⁷.

¹ Welsh Government, (2021). *Llwybr Newydd: the Wales transport strategy 2021*. Available at: <https://gov.wales/llwybr-newydd-wales-transport-strategy-2021> [Accessed 08/12/2023]

² Welsh Government, (2007). *Technical advice note (TAN) 18: transport*. Available at: <https://gov.wales/technical-advice-note-tan-18-transport> [Accessed 08/12/2023]

³ Welsh Government, (2021). *Welsh transport appraisal guidance (WelTAG)*. Available at: <https://gov.wales/welsh-transport-appraisal-guidance-weltag> [Accessed 08/12/2023]

⁴ Neath Port Talbot Council, (ND). *Joint Local Transport Plan*. Available at: <https://www.npt.gov.uk/1461> [Accessed 08/12/2023]

⁵ Bridgend County Borough Council, (2015). *Local Transport Plan 2015 – 2030*. Available at: <https://www.bridgend.gov.uk/media/4087/bridgend-ltp-wg-approved-version-may-2015-2030.pdf> [Accessed 08/12/2023]

⁶ Crown and database, (2023). *Highways Act 1980*. Available at: <https://www.legislation.gov.uk/ukpga/1980/66> [Accessed 08/12/2023]

⁷ HM Treasury The Green Book Section 2.18.

11.3 CONSULTATION

Scoping Direction

- 11.3.1 The Planning Inspectorate provided a scoping direction in response to the proposed development's scoping report. The following key elements were noted in the scoping report in relation to traffic and transport:
- The impact of the proposed development on the public road network should be assessed using the latest guidance, including the Guidelines for the Environmental Assessment of Road Traffic (IEMA 1993);
 - The study would consider effects during construction, operation and decommissioning; and
 - The traffic and transport chapter will include the Traffic Impact Assessment (TIA) and a preliminary TMP.
- 11.3.2 Full copy of the scoping report and scoping direction can be found in Appendix 3 in Volume 3 of this ES.

Welsh Government Highways and South Wales Trunk Road Agent (SWTRA)

- 11.3.3 Meetings were held with representatives from SWTRA and the Department for Economy and Infrastructure in September 2020 and January 2022. During consultation draft information was shared including an AIL route survey and design of the proposed M4 slip road. The principle of creating a new slip road was agreed, provided that the final design for the junction should be in accordance with the Design Manual for Roads and Bridges (DMRB) and would need approval by Welsh Government and SWTRA via a suitably worded planning condition.
- 11.3.4 Further to ongoing consultation throughout the development process, Welsh Government as highway authority for the M4 motorway responded to both June 2023 Pre-application Consultation (PAC) and the July 2023 Access Scoping Addendum, with the latter response being both more detailed and up to date, including proposed planning conditions (copy with the Access Scoping Direction at Appendix 3.7). A full response to points raised is provided within the PAC Report that is being submitted with the DNS application.

Neath Port Talbot County Borough Council

- 11.3.5 NPTCBC policy for wind farms recommends that planning permission is not determined until such time as a TMP for the access route to the site has been agreed with the Highway Authority.

Bridgend County Borough Council

- 11.3.6 The methodology for determining the impact of the development is to be considered.
- 11.3.7 It was stated that the threshold of 30% noted in the Guidelines for the Environmental Assessment of Road Traffic (IEMA 1993) was not acceptable and that an increase of 5% traffic on the highway network would constitute a material planning consideration needing further analysis.

- 11.3.8 BCBC policy for wind farms recommends that planning permission is not determined until such time as a TMP for the access route to the site has been agreed with the Highway Authority.

- 11.3.9 A meeting was held between Natural Power and BCBC⁸ to discuss the thresholds; the key outcome was that Natural Power would identify any areas of concern if that arise and apply mitigation measures through the TMP as necessary.

Pre-Application Consultation (PAC)

- 11.3.10 Table 11.1 summarises the comments received from the PAC process and the response made.

⁸ Meeting held with Leigh Tuck, Senior Transportation Development Control Officer on 17/05/2021.

Table 11.1: Summary of PAC comments

Consultee	PAC Comment	Response
BCBC	<i>It is noted the proposed construction/abnormal route access is now through the Borough of Neath and Port Talbot. And whilst there is likely to be significant impacts in respect of the access route this is more a matter that is likely to be raised within the observations of Neath Port Talbot County Borough Council Local Planning Authority.</i> <i>Bridgend County Borough Councils Highway Authority have initially however, provided the following observations:</i>	
	<i>It is noted that the intention is now to not route the abnormal loads through Maesteg. Instead, the proposal is to construct a bespoke access from junction 40 of the M4.</i> <i>However, the volume of 'normal' construction traffic projected to use the site – over a 24 month period – is significant. This traffic will likely increase the rate of deterioration along the A4063 / B4282 and result in the need for more urgent intervention works to repair localised defects and bring forward the need to undertake larger resurfacing works. As such, a request should be made asking for a detailed route survey (pre-construction), a monitoring regime, routine maintenance regime and commuted sum, as part of an extraordinary traffic agreement.</i>	It is acknowledged that the anticipated volume of construction traffic along the A4063 and the B4282 may increase the rate of deterioration of these roads. To manage the effects of this, it is also agreed that a detailed pre-construction route survey should be undertaken, and a monitoring and maintenance regime should be put in place. The details of these items would be agreed upon between BCBC and the appointed contractor, which could include the raised crossing points and the general street condition on the A4063. As a contractor will not be appointed until the pre-construction phase, this requirement should be included as a planning condition.
	<i>Particular concerns are raised over the raised crossing points on A4063 Commercial Street and the general condition of the street.</i>	As above. Pre, during and post construction surveys
	<i>The assessment of the A4063 and B4282, contained in the 'Traffic and Transport assessment' appears very simplistic.</i>	The impact of the proposed development on the A4063 and B4282 was assessed using the latest guidance, including the Guidelines for the Environmental Assessment of Road Traffic (IEMA 1993), which is standard industry practice for wind farm applications. Given the nature of the development, with the majority of movements to and from site taking the form of AIL or HGV deliveries, there is no scope for assessing topics such as mode split or public transport as would be expected for other development types. In addition, the main traffic impact of the development will occur during the relatively short-duration construction phase, with the operational traffic adding a negligible amount to the baseline volumes. The effect of the construction phase traffic is most appropriately dealt with through the implementation of the TMP and a monitoring and maintenance regime. Therefore, the assessment undertaken for the A4063 and B4282 is deemed to be appropriate.
NPT Highways and Drainage	<i>Whilst Chapter 11 deals with Traffic flow and Transport within the ES there is no Transport Statement provided in accordance with TAN 18.</i>	TAN18 calls for the submission of a Transport Assessment and a Transport Implementation Strategy in order to provide the necessary information to assess the suitability of an application in terms of travel demand and impact. These documents should set out the travel demand, the likely modal split and detail

Consultee	PAC Comment	Response
		the measures proposed to improve access by public transport, walking and cycling and reduce the number and impacts of motorised journeys associated with the proposal. A traffic and transport assessment was undertaken for the proposed wind farm development using a methodology developed from the 'Guidelines for the Environmental Assessment of Road Traffic' (IEMA 1993). This assessment provided details on the travel demand and potential impact on the surrounding road network. Given the nature of the development, with the majority of movements to and from site taking the form of AIL or HGV deliveries, there is no scope for assessing topics such as modal split or public transport as would be expected for other development types. In addition, the main traffic impact of the development will occur during the relatively short-duration construction phase, with the operational traffic adding a negligible amount to the baseline volumes. Therefore, the impact of the construction phase traffic is considered to be most appropriately dealt with through the implementation of the construction phase TMP and a monitoring and maintenance regime. It is expected that a Planning Condition will be included which requires the construction phase TMP to be issued to NPT for agreement prior to construction commencing.
	<i>Item 11.4.12, 11.4.13 & 11.4.14– agree with the possible mitigation methods proposed. However further details is required showing how the mitigation measures are implemented.</i>	Details of the mitigation measures proposed will be included in the construction phase Traffic Management Plan. This document will be prepared by the appointed contractor. It is expected that a Planning Condition will be included which requires the TMP to be issued to NPT for agreement prior to construction commencing.
	<i>Item 11.4.22 quotes “In the absence of Department for Transport (DfT) data at Goytre Road, NPTCBC results of a speed survey undertaken in 2016, this has been considered in the assessment” Using this data may not provide an accurate baseline of traffic flows due to the data being nearly 7 years old. Even though there may be evidence of a number of traffic vehicles the survey is used for speed survey data collection not traffic trips – can we suggest a real-time traffic survey be undertaken within a neutral month?</i>	At the time the report was prepared there were uncertainties over traffic flows due to Covid 19 and it was deemed appropriate to use historic data. However, sufficient time has now passed that it is agreed real time data would be reliable and so a survey was commissioned for September 2023. The assessment has been updated with the results of this new survey.
	<i>Item 11.5.8 it is noted that no vehicles are proposed to exit the site via the proposed M4 diverge – we support this proposal.</i>	Noted
	<i>Item “Baseline Traffic Data” refers to 2016 NPTCBC speed survey data, and DfT data from 2019. Whilst this exercise would have been useful to give an in principle</i>	Agreed. A traffic survey has been commissioned and the assessment will be updated with the results.

Consultee	PAC Comment	Response
	<i>idea of flows, I would like to see baseline based figures in real time post pandemic. This will provide a more accurate assessment.</i>	
	<i>It is unclear how many vehicle (HGV's and LGV's) will be used at either junction of access point 2 (B4282) and point 3 Goytre Road. The data show a general combination of deliveries but not specific to each junction.</i>	The predicted vehicle movements per month are indicated in Table 11.10 and Table 11.11 for HGVs and LGVs respectively. This is the total predicted vehicles for the project. Distribution between the various access points is a percentage of this total, the split is as outlined in 11.6.18 – 11.6.20. The below bullet points have been updated to provide additional clarity on the HGV and LGV percentages which will enter the proposed development at each access point and each link route which will be used.
	<i>Predicted data of vehicle movements are noted, however as previously stated I think fresh and current data would be required for the baseline figures.</i>	Agreed. A traffic survey has been commissioned and the assessment will be updated with the results.
	<i>Item 11.6.23 percentage assessment increase show >5% average during the course of construction. Whilst this is only a temporary activity estimated over 24 months, In terms of delay can it be quantified how long traffic is likely to be delayed on adopted highways leading to and from the site – timings of deliveries may assist you with mitigation.</i>	The assessment of construction traffic movements is based on current best estimates of daily requirements across the duration of the construction programme. In order to quantify delays on adopted highways, a more granular level of detail for delivery timings would be required. This information is not currently available and will not be known until the construction phase. Even at that stage, the deliveries would be subject to change depending on construction progress, weather events etc, making it extremely difficult to provide accurate numbers for hour flows. Any assessment of delays would therefore be based on a large number of assumptions which would result in low confidence in any model outputs for anticipated delays. In order to minimise delays on the adopted highways, the construction phase TMP can be used to restrict the timings of deliveries to avoid network and school peak periods whenever possible.
	<i>Table 11.17 - Within Goytre Road it flags up sensitivity risk "Driver Delay", Pedestrian Fear & intimidation and Safety to be HIGH. Whilst the Construction Phase Effects (Item 11.7.5) highlights High Risk to be "Not Significant" We have concerns that this will result in a serious or significant impact upon highway and pedestrian safety. We need to safeguard the community of Goytre.</i>	The importance of safeguarding the community of Goytre is acknowledged and was taken into account in the assessment. Driver Delay, Pedestrian Fear & Intimidation and Safety were all assessed as high sensitivity receptors, however as construction traffic flow through Goytre will be restricted the magnitude of impact is low resulting in a Not Significant effect. The community of Goytre will be safeguarded by ensuring that limited construction traffic flow is permitted to access site along that route. A Planning Condition is expected to be included with the requirement for the development of the construction phase

Consultee	PAC Comment	Response
		TMP to be issued to NPT for agreement prior to construction commencing. This will ensure that adequate mitigation measures are in place.
	<i>Acces from goytre to site (if agreed) should be tarmaced for the first 10 metres length and full width, to allow a bound surface and prevent overspill of loose material on to the public highway.</i>	Agreed. Detailed design will indicate a bound surface. This can be enforced as a requirement with a Planning Condition.
	<i>References were made within the ES to Volume 3: Appendices - The HGV Traffic Management Plan was accessible and refers to further details awaiting the appointment of principle contractor therefore not much to respond on in terms of detailed information at this point.</i>	Noted. A Planning Condition is expected to be included with the requirement for the deveopment of the construction phase TMP to be issued to NPT for agreement prior to construction commencing.
	<i>The AIL TMP refers to mitigation proposals to ensure safe delivery of AIL, however no details of site setup, parking, operational vehicles, whetehr or not additional support is required for widening of access tracks off the trunk road, together with security of access road and proposed preventative measeures required to not allow other vehicles to enter off the slip road or park once development is completed. SWTRA to comment on deliveries/delays and structures of ministerial roads.</i>	Refer to Appendix 3.4 for response.
	<i>No details of the proposed access slip road and associated highway tie-in to exiting private land (cut and fill), lighting and additional street furniture/signage etc has been submitted for assessment. This information may very well be available within the four documents listed within item 11 above. However it was not accessible to me when undertaking the assessment.</i>	Refer to Appendix 3.4 for response.
	<i>A suggestion to undertake a survey of all relevant estate roads (Goytre Rd) will be required pre commemcmnt of construction traffic and post construction traffic where any damage occurred resulting in these additional delivery movements shall rectified and made good by the applicant. It is also important to engage with residents before construction deliveries occur and specify timings agreed as part of the Traffic Manegment Plan, with the intention to review periodically when necessary and further mitigation required if needed.</i>	It is acknowledged that an appropriate Planning Condition will be required to set out requirements of a detailed pre-construction route survey along with a monitoring and maintenance regime. A Planning Condition will also set out requirements for community consultation in the development of the construction phase TMP which will be issued to NPT for agreement prior to construction commencing.
	<i>Any gates required on private land fronting onto the highway shall be of a type which open inwards only, can be seen thorough and maintained as such thereafter.</i>	Agreed. Any gates will also be set back sufficiently from the highway to allow a HGV to drive fully off the road before reaching the gate. This can be enforced by the inclusion of a Planning Condition.

Consultee	PAC Comment	Response
	<i>Additional works required on the existing publically maintained highway will require an adoption agreement.</i>	Noted
	<i>No development shall take place to construct any infrastructure or buildings until a Construction Method Statement has been submitted to and approved in writing by the Local Planning Authority. The statement shall provide for:</i> <i>the parking of vehicles of site operatives and visitors</i> <i>loading and unloading of plant and materials</i> <i>storage of plant and materials used in constructing the development</i> <i>the erection and maintenance of security hoarding including decorative displays and facilities for public viewing, where appropriate</i> <i>wheel washing facilities</i> <i>measures to control the emission of dust and dirt during construction</i> <i>a scheme for recycling/disposing of waste resulting from demolition and construction works</i> <i>scheme for the erection of temporary/semi temporary signage warning drivers of the presence of children and speed restrictions.</i> <i>The Construction Method Statement shall be signed by a competent person(s).</i> <i>The approved Statement shall be adhered to throughout the construction period.</i>	Agreed. It is expected that this will be committed via a Planning Condition.
	<i>Detailed signage shall be submitted to and approved in writing by the LPA, the approved sign shall erected at the entrance of the access road on private land not publically maintained highway stating the following in English and Welsh 'PRIVATE ROAD with no intention to dedicate under S37 of the Highways Act 1980' the signange as approved shall be constructed on site prior to the ocupation of the first dwelling.</i>	Noted
	<i>No Road Safety Audit required for access road off the M4 (Abnormal Indivisible Loads) because the access road is purley for opertional traffic not public use.</i>	Refer to Appendix 3.4 for response.

11.4 TRAFFIC AND TRANSPORT METHODOLOGY

- 11.4.1 The methodology employed in this assessment is developed from guidance given in the ‘Guidelines for the Environmental Assessment of Road Traffic’ (IEMA 1993). To assess the effects of the additional traffic generated by the proposed development the sequence of steps detailed has been followed.
 - Establishment of baseline traffic conditions;
 - Estimate the traffic numbers and routing for the proposed development;
 - Determine the magnitude of impact to the baseline traffic conditions due to the proposed development;
 - Undertake a screening test to delimit the scale and extent of the assessment;
 - Identify receptors potentially affected by the traffic associated with the proposed development,
 - Assess the sensitivity of receptors with best practice embedded mitigation considered;
 - Synthesise the sensitivity of the receptor with the magnitude of impact to determine the significance of effect; and
 - If the significance is elevated, review opportunities to implement impact mitigation measures and re-assess the significance of effect.
- 11.4.2 Consideration was given to the construction, operation and decommissioning phases of the proposed development.
- 11.4.3 When considering the magnitude of the impact it should be recognised that the traffic generated by the proposed development would be short term due entirely to vehicle movements relating to the construction phase of the proposed development. Following completion of the construction phase, traffic levels will return to their baseline conditions as the impact of vehicle movements during the operational phase, largely LGVs, is deemed to be negligible within the context of baseline traffic.
- 11.4.4 The method of decommissioning would be agreed with the relevant planning authority as outlined in Chapter 5: Project Description of this ES. In line with current practice all turbine components, including blades, nacelles and towers would be removed from the site. If not to be re-used, turbine components would likely be cut to manageable sizes on site to allow use of HGVs. Above ground infrastructure would be removed with foundations generally removed to around 1 m below ground level, with the remainder left in-situ. Therefore, the HGV movements would be less than during the construction period. The decommissioning would be likely to take place over a similar time period shown. Baseline traffic flows on all of the affected roads may have altered by the end of the up to 50-year lifetime of the wind farm leading to the possibility of a different effect on the roads for HGV traffic. It is envisaged that the decommissioning would result in lesser effects than those identified for this assessment and no further assessment has been undertaken. Decommissioning would be managed in accordance with a decommissioning plan to be agreed with relevant authorities at the time.
- 11.4.5 As such this assessment will consider the effects during the construction phase only.

Magnitude of Impact

- 11.4.6 The magnitude of traffic impact is a function of the existing traffic volumes, the percentage increase due to the proposed development and changes in type of traffic. The IEMA Guidelines identify magnitude thresholds based on percentage changes in traffic levels as being applicable to severance and intimidation effects. The magnitude of impacts arising from the increase in traffic volumes (taken as being either the traffic flow including all vehicles or the HGV traffic flow, whichever is higher) is categorised in Table 11.1.

Table 11.2: Definitions of magnitude of impact criteria

Magnitude	Criteria	Percentage Increase
High	Total loss or major alteration to key elements/features of the baseline conditions	>90%
Medium	Partial loss or alteration to one or more key elements/features or the baseline conditions	>60-90%
Low	Minor shift away from baseline conditions	>30-60%
Negligible	Very slight change from baseline conditions	>0-30%

- 11.4.7 The determination of the magnitude of the impacts is undertaken by reviewing the proposed development, establishing the parameters of the additional road traffic that may cause an impact, and quantifying these impacts.

Screening Test

- 11.4.8 The IEMA Guidelines suggest two general rules for establishing the increase in traffic levels that are likely to affect the environmental conditions of the road, and that therefore warrant consideration, namely:
 - Rule 1** - Include highway links where traffic flows would increase by more than 30% (or the number of HGVs would increase by more than 30%); and
 - Rule 2** - Include any other specifically sensitive areas where traffic flows would increase by 10% or more. (IEMA Guidelines Paragraph 3.20 defines sensitive areas as including ‘*accident blackspots, conservation areas, hospitals, links with pedestrian flows etc.*’). Paragraph 3.20 also notes that ‘*normally it would not be appropriate to consider links where traffic flows have changed by less than 10% unless there is a significant change in the composition of traffic, e.g. a large increase in the number of heavy goods vehicles*’.
- 11.4.9 Where the predicted increase in traffic flow is lower than these thresholds, the IEMA guidelines suggest that further detailed assessments are not warranted.
- 11.4.10 The matrix shown in Table 11.2 is used for traffic assessment.

Table 11.3: Screening criteria

Rule 1	Rule 2	Further assessment required
Yes	Yes	Yes
Yes	No	Yes

Rule 1	Rule 2	Further assessment required
No	Yes	Yes
No	No	No

Receptor Identification

11.4.11 The IEMA Guidelines identifies receptors that may be sensitive to changes in the traffic conditions resulting from the proposed development. A review of the surrounding area and consultation with the Local Authority has been undertaken to identify receptors potentially affected by the proposed development. For the purposes of this assessment, receptors have been grouped as detailed in Table 11.3.

Table 11.4: Receptor Classification

Receptor Group	Receptors
Settlements	Pedestrians, cyclists, sensitive locations (hospitals, churches, schools), rural properties adjacent to road.
Road Network & Users	Road structure, drivers, cyclists.

Embedded Mitigation

11.4.12 Embedded mitigation is considered to be measures that have been incorporated into the design of the development. In terms of traffic and transport, embedded mitigation is primarily delivered through a TMP. As part of the traffic and transport assessment chapter, preliminary TMPs have been prepared (Appendix 11.1 and 11.2) and it is expected a planning condition will be applied to the development for a final construction TMP to be prepared post consent and prior to construction works commencing.

11.4.13 A TMP should be tailored to suit the requirements of the proposed development. Embedded mitigation are good practice measures which would be detailed in the TMP, regardless of the outcomes of the TIA and are included in the proposed development when determining the sensitivity of receptors. Where traffic effects are assessed as being significant, then impact mitigation measures will be considered to reduce the effects to acceptable levels. Impact mitigation measures will then be detailed in the TMP in addition to the adopted embedded mitigation.

11.4.14 Embedded mitigation measures adopted in the TMP and in the proposed development for the assessment of receptor sensitivity include:

- Scheduling of HGV deliveries to avoid peak times;
- Temporary signage to direct HGV drivers to the proposed development and advise of routes not permitted;
- Temporary signage, including use of variable message signs, to inform both drivers and pedestrians of risks and highlight rights of ways/ priorities;
- Reduced speed limits;
- Scheduling of construction activities, with focus on concrete and AIL deliveries to reduce deliveries whilst key activities are occurring;

- Trial run for AIL movements prior to commencement of construction;
- Proactive consultation with highway authorities and police to co-ordinate AIL deliveries; and
- Proactive consultation with the local highway authorities, the local community and individuals who will be most affected during the construction period.

Assessment of Sensitivity

11.4.15 The IEMA Guidelines provides guidance on how the various traffic impacts affect receptors but does not provide explicit values for the sensitivity of receptors. Using the IEMA Guidelines as a basis, professional judgement and experience was used to develop a classification of the sensitivity of the receptors to the potential traffic impacts, taking account of the embedded mitigation. A scale of 'low', 'medium' and 'high' has been used in this assessment.

11.4.16 Table 11.4 details the receptors and criteria used to assess their sensitivity with respect to the traffic impacts. The effects of factors such as noise and ecological impact are assessed in Chapter 12 and 6 respectively of this ES.

Table 11.5: Sensitivity of Receptor Criteria

Receptor Group	Impact	Low	Medium	High
Settlements	Severance	Settlement with no or limited facilities. Adequate walkways, wide, interconnected, providing adequate separation between pedestrians and traffic. Designated pedestrian crossing points to link walkways, pedestrians and facilities.	Settlement with some and key facilities. Pedestrian walkways, narrow in places, gaps to interconnectivity and limited separation between pedestrians and traffic. No formal designated pedestrian crossing points, may have traffic islands.	Settlement with a wide range of facilities. No or limited pedestrian walkways, narrow with no separation between pedestrians and traffic. No designated pedestrian crossings points.
Road Network & Users	Driver Delay	Major or strategic road networks such as motorways, or a road network with suitable capacity to absorb an increase in traffic. No capacity issues raised by Roads Authority.	Road networks with some capacity to absorb an increase in traffic. Capacity issues identified at specific junctions or specific times of day.	Road network with little or no capacity to absorb an increase in traffic. Capacity issues identified at multiple junctions or extended periods of the day.
Settlements	Pedestrian Delay	Settlement with little pedestrian activity. Designated pedestrian crossing points.	Settlement with some pedestrian activity. Informal pedestrian crossing points such as traffic islands.	Settlement with high pedestrian activity. No pedestrian crossing points.
Road Network & Users and Settlements	Pedestrian and Cyclist Amenity	Settlement with little pedestrian or cycle activity. Wide	Settlement with some pedestrian and cycle activity. Popular cycle	Settlement with high pedestrian and cycle activity. Route on the

Receptor Group	Impact	Low	Medium	High
		footpaths, segregated cycle lanes.	route, not on the National Cycle Network. Footpaths narrow in places. Non segregated cycle lanes or wide road with sufficient space for cyclists.	National Cycle Network. No or limited footpaths. No cycle lanes or road width narrow with limited space for cyclists.
Settlements	Pedestrian Intimidation	Settlement with little pedestrian activity. Wide footpaths, space or guardrails providing separation to traffic.	Settlement with some pedestrian activity. Footpaths narrow in places, some guardrails providing separation to traffic.	Settlement with high pedestrian activity. Footpaths narrow and no separation to traffic.
Road Network & Users and Settlements	Safety	Major road with limited junctions and hazards designed to current standards. Space of physical segregation between traffic, cyclists and pedestrians. No serious or fatal accidents from previous 5 years of data.	More localised roads with some junctions and hazards (bends, constrained geometry, sections of poor visibility). No physical segregation between traffic and cyclists and pedestrians. No fatal accidents from previous 5 years of data.	Road with several junctions and hazards (sharp bends, constrained geometry, poor visibility). No segregation between traffic and cyclists and pedestrians. Fatal accident(s) from previous 5 years of data. Near to sensitive locations such as hospitals, retirement homes, schools, places of worship, public open spaces and tourist attractions.
Road Network & Users	Road Structure	Major roads with no obvious physical defects and well maintained. Visual inspections suggest designed to current standards with good road foundation.	Regional roads with some minor physical defects being maintained. Visual inspections suggest adequate design and road foundation.	Local roads with some physical defects or local roads, infrequently maintained with reoccurring physical defects. Visual inspections suggest poor design and road foundation (e.g. floating road).

Assessment of Significance

11.4.17 The significance of any given effect is taken to be a synthesis of both the magnitude of the impact and the sensitivity of the receptor. The criteria used in determining significance is set out in Table 11.5.

Table 11.6: Significance of Effect

		Magnitude of Change			
Sensitivity		High	Medium	Low	Negligible
	High	Major	Major/Moderate	Moderate	Moderate/Minor
	Medium	Major/Moderate	Moderate	Moderate/Minor	Minor
	Low	Moderate	Moderate/Minor	Minor	Minor/Negligible

Note: Only **Major** and **Major / Moderate** significance are considered significant.

Impact Mitigation

11.4.18 Where the assessment identifies impacts considered significant, then specific impact mitigation measures will be developed. The significance of effect will then be re-assessed with the incorporation of the impact mitigation. The impact mitigation measures will then be incorporated into the preliminary TMP for adoption in the proposed development.

Uncertainties and Assumptions

11.4.19 A range of uncertainties are present with any assessment of traffic effects. With respect to this ES, such uncertainties and assumptions are detailed. These uncertainties are minimised by maintaining conservative assumptions and the provision of estimates based on recent wind farm construction experience.

Existing Traffic Flows

- 11.4.20 The assessment relies on the availability and accuracy of traffic flow data to establish baseline traffic conditions on the surrounding network.
- 11.4.21 The available data for the M4, A4107, A4063 and B4282 is considered extensive, covering a broad time frame. This ensures that the baseline traffic conditions derived for these roads is an accurate reflection of actual conditions.
- 11.4.22 In the absence of Department for Transport (DfT) data at Goytre Road, NPTCBC provided results of a speed survey undertaken in 2016, this has been considered in the assessment.

Traffic Generation

11.4.23 The estimated traffic generated by the proposed development comprises general construction loads (HGVs) such as bulk materials; abnormal loads for turbine components; and LGVs. Traffic numbers have been calculated based on the design undertaken as described in Chapter 5: Project Description, along with Natural Power's and the applicant's experience of wind farm development and construction.

Assessment of Traffic Effects

11.4.24 The methods for assessing the likely traffic effects are based upon IEMA guidance as noted in paragraph 11.4.1. In assessing the traffic effects a level of professional judgment and experience

is applied in line with the IEMA guidelines and therefore, predicted effects should not be considered as absolute.

Assumptions and Limitations

- 11.4.25 The assessment is based upon average traffic flows per month, over the course of a typical duration construction programme. Movements associated with the proposed development will vary within each month based upon the activities being undertaken. As a contractor has not been appointed or a detailed construction programme developed, a more granular assessment is not possible at this stage.
- 11.4.26 The assessment of the AIL delivery is based upon generic parameters as neither candidate turbine supplier nor haulier company has been appointed.

11.5 BASELINE TRAFFIC CONDITIONS

Construction Traffic Routes

Abnormal Indivisible Loads

- 11.5.1 An AIL Route Survey has been undertaken for the major component deliveries and is included in Appendix 11.2 of the ES. The preferred route for the major component deliveries is as follows:
- From Swansea Port, loads would depart the port and access the A483 Fabian Way (Eastbound) using a contraflow manoeuvre;
 - Loads would proceed eastbound and would join the M4 at Junction 42;
 - Loads would proceed on the M4 until the site access junction; and
 - Loads would depart the M4 and would continue to site using private, purpose-built access tracks.
- 11.5.2 The AIL route assumes a Port of Entry at Swansea and generally utilises trunk roads. The final approved AIL route will not be known until the turbine supplier is appointed and they have in turn reached contractual agreements with the port, sea freight/shipping company and a road haulier.
- 11.5.3 Swansea has been used for previous wind farm component deliveries and is considered to have sufficient facilities to handle deliveries of the turbines being considered for the proposed development. There are other ports that could also accommodate the turbine deliveries and if adopted this would change the wider proposed AIL route, however the proposed site entrance and final approach from the M4 travelling eastwards would remain.

General Construction Traffic

- 11.5.4 General construction traffic and material deliveries will travel to site via the A4107, B4282 and A4063 depending on their origin.
- 11.5.5 There are three different site access points which are proposed for AILs, HGVs and LGVs accessing and egressing from the site. These are outlined here, see also Figure 11.1.
- 11.5.6 Several other site access locations were considered, however were discounted. These are discussed in Chapter 4.

Access Point 1 – Purpose Built Diverge Slip Road from M4 for AIL Deliveries

- 11.5.7 Access Point 1 is located to the south of the south section of proposed development, this access point is for AIL deliveries only. AILs will exit the M4 via a purpose built diverge. Once unloaded the delivery vehicles will be reduced in size to HGVs and will exit the site from one of the alternative access points. No vehicles will exit the site from the proposed M4 diverge.
- 11.5.8 Whilst falling outside of the scope of this assessment of the construction of the wind farm, the potential for disruption as a result of the construction of the proposed diverge slip road on users of the M4 is recognised. At the current time it is not fully understood how the connection between the M4 and the wind farm track will be made or the traffic management required, these matters will be considered in the context of the additional consent required under the Highways Act. This is a matter that will be covered by a planning condition developed in consultation with the relevant authorities. However it is assumed that the construction works will be undertaken from the proposed development rather than the M4. There will be no vehicular traffic associated with the construction of the proposed diverge slip road exiting from the M4. Paragraphs 5.6.16 to 5.6.23 of Chapter 5 provide indicative details from an experienced highways and wind farm construction contractor.

Access Point 2 – B4282

- 11.5.9 Located on the B4282 between Bryn and Maesteg settlements, south of the north section of the proposed development, at this location it will be possible for construction traffic to access or egress the north section of the site.
- 11.5.10 Traffic to this access point will either travel from the M4 Junction 40 along Highway Link A and Highway Link B; or alternatively traffic will arrive from Highway Link C and Highway Link D.

Access Point 3 – Goytre Road

- 11.5.11 Highway Link E on Figure 11.1 has been assumed as the route to access point 3, located to the west of the south section of proposed development, this access point is for traffic entering or exiting the south section of the site and is the nearest access from the M4. Traffic exiting M4 Junction 40 will then travel along Dyffryn Road and Goytre Road before entering the site. This access point is assumed to be used for limited HGV/LGV deliveries due to the distance of the construction compound areas from the access point.

Road Description

A4107 (Afan Valley Road)

- 11.5.12 The A4107 is a local authority-maintained road which runs from south-west near M4 Junction 40, north-east through NPTCBC area to Cymer. It is located to the west of both the north and south sections of the proposed development site boundary. The A4107 is a two-lane single carriageway and a local route for the area. The geometry of the road is considered to generally be constrained with tight corners. Reduced speed limit to 40 miles per hour (mph) applies to the majority of the route.

11.5.13 The overall condition of the A4107 to the west of the proposed development is considered to be good with minimal potholes or upgrades required.

11.5.14 The A4107 between Abergwynfi and Treorchy was closed in 2019 due to a landslide but was subsequently reopened.

B4282 (Maesteg Road)

11.5.15 The B4282 is a local authority-maintained road which runs from west to east between the north section and south section. To the west of access point 2 the road is in NPTCBC area, to the east of access point 2 the road is within BCBC area.

11.5.16 The B4282 is a two-lane single carriageway and a local route for the area. The geometry of the road is considered to generally be constrained with tight corners.

11.5.17 The overall condition of the B4282 is showing signs of deterioration with areas of potholes.

A4063 From Tondy to Maesteg

11.5.18 The A4063 is a local authority-maintained road which runs from north to south, through several residential areas from Cymer to Tondy. The road is located to the east of the proposed development. The road is located within BCBC area.

11.5.19 The A4063 is a two-lane single carriageway and a local route for the area. The geometry of the road is considered to generally be constrained with tight corners. National Speed Limit generally applies with reduced speed through sections.

11.5.20 The overall condition of the A4063 is reasonable with areas of deterioration.

Dyffryn Road / Goytre Road

11.5.21 Goytre Road is a local authority-maintained road which runs from the M4 Junction 40 to Goytre. The road is located within NPTCBC area.

11.5.22 Goytre Road is a two-lane single carriageway and a local route for the area. The geometry of the road is considered to generally be constrained with tight corners.

11.5.23 The overall condition of the Goytre Road is reasonable with limited signs of deterioration.

Baseline Traffic Data

11.5.24 Traffic surveys were undertaken in September 2023 to establish the baseline traffic conditions on each link. The average daily traffic (ADT) volumes gathered from the surveys were used as the baseline with growth factors applied to project to the year 2025, the anticipated year of construction commencing. Growth factors were established from TEMPro Version 8.0 using NTEM regional datasets.

11.5.25 Table 11.6 shows the average daily traffic flows used in the assessment.

Table 11.6: Average daily traffic flows

Link Reference	Location	Average Daily Traffic (Total Traffic)	Average Daily Traffic (HGV Traffic)	% HGVs
Link A	A4107 (Goytre Road to B4282)	2517	260	10.3
Link B	B4282 (Maesteg to Site Entrance)	5548	413	7.5
Link C	A4063 (M4 Junction 36 to Maesteg)	13072	752	5.8
Link D	B4282 (Maesteg to Site Entrance)	5465	597	10.9
Link E	Goytre Road	2148	101	4.7

Source: DfT Road Traffic Statistics

11.6 INITIAL SCREENING ASSESSMENT

Quantification of Development Activities

11.6.1 Vehicles and equipment will be delivered to site at the commencement of the relevant construction phase and will remain on site until work relating to that stage are completed. Such equipment will include excavators, dump trucks and bulldozers and cranes for erecting the turbines. An indicative list of the equipment needed is given in Chapter 5: Project Description, of the ES.

11.6.2 Each vehicle travelling to the site will generate two 'vehicle movements'; one movement to the proposed wind farm and one movement away from the wind farm i.e. 1 delivery to the wind farm = 2 vehicle movements.

11.6.3 The application includes provision for onsite borrow pits that would be utilised to source stone for the construction of the access tracks and hardstands. It is anticipated these will provide sufficient quantities and quality of stone for the proposed development.

11.6.4 Similarly, given the size of the anticipated turbine foundations (~1200 m³ of concrete) it is anticipated the concrete would be mixed on site to reduce the risks associated with the volumes and supply for these critical structural elements. This chapter assesses both the expected scenario of all stone being site won and concrete on-site batched, along with the worst-case scenario which assumes the top 150 mm of stone would need to be imported and all concrete foundations would need to be brought to site in ready mix lorries.

11.6.5 Most vehicles used during the construction activities will be below requirement for wide loads, with the exception of the turbine deliveries, and possibly the 800/1000 and 400/500 (or less) tonne cranes, which would be used for the erection of the turbines.

11.6.6 The M4 motorway is a high-capacity trunk road with average annual daily flow of 24,233 in an Eastbound direction. The number of AIL deliveries associated with the proposed development is expected to be four AIL deliveries per evening, (comprising two journeys of two AILs in convoy) plus support vehicles, and as such the impacts associated with the delivery of the AILs are considered negligible and therefore removed from this assessment.

11.6.7 The AIL route survey identified a number of pinch points from the Port of Entry to the site entrance. The proposed modification works to enable AIL loads to navigate these pinch points include

oversail of the pavement edge, temporary removal of street furniture, vegetation trimming and forming a new diverge slip road from the M4 motorway. With the exception of the proposed M4 diverge slip road and realigned B4282 access junction, the works are considered temporary and minor in nature and do not involve significant modifications to the highway network.

- 11.6.8 Given the potential for a variation to the route to be adopted, the minor nature of the modifications works, with the exception of the M4 diverge slip road, and the short duration of the modification works (particularly with reference to the overall proposed development assessment period), it is not considered appropriate to assess the potential traffic impacts associated with the construction of all the pinch point modification works identified. However, traffic delay is considered in the AIL TMP (Appendix 11.2).

Construction Traffic Generation

- 11.6.9 The predicted number of construction traffic vehicle movements has been developed based on design information from the preparation of the ES as described in Chapter 5 and Natural Power and the applicants' experience of wind farm construction. The assessment includes vehicle movements from the following construction activities with predicted movements detailed in Table 11.7.

- **Mobilisation to Site:** Mobilisation to site will involve the transport of plant for the construction works (including dump trucks, dozers/graders, excavators, forklifts), temporary office facilities, welfare units and storage containers, and general construction equipment such as fencing for site compounds and fuel bowzers. Rock crusher/processing plant will also be transported to site to crush and grade material from the borrow pits suitable for use in the construction works;
- **Forestry** – Forestry includes for the advance works undertaken to either keyhole felling or clear felling an area prior to construction activities commencing, further details are noted in Chapter 13: Forestry of the ES;
- **AIL Enabling Works (M4 Diverge Slip Road and Access Track):** Based on the AIL Route Survey it is anticipated there will be works required at certain pinch points along the route. Construction of a diverge slip road from the M4 and associated track to the proposed development boundary is also required, see Appendix 11.2;
- **Site Tracks, Crane Pads and Compounds (Stone):**
 - Scenario 1: it is envisaged that all of the stone for the site tracks, crane pads and compounds (temporary construction and substation) would come from the on-site borrow pits and would be transported around site using dump trucks. This includes stone required for the concrete batching plant platforms. Stone for the turbine foundation concrete would be imported; and
 - Scenario 2: it is envisaged that the majority of the stone for the site tracks, crane pads and compounds (temporary construction and substation) would come from the on-site borrow pits and would be transported around site using dump trucks. Under this scenario, it has been assumed the finished running surface of the tracks, crane-pads and substation compound would be imported;

- **Geogrid and Culverts:** An allowance has been included for laying geogrids along the new and upgraded access tracks and crane-pads. Geogrid rolls are generally 4 m wide and therefore it is assumed two geogrids will be required per length of new track and one geogrid required for existing track which is to be widened to provide sufficient width coverage. Similarly, an allowance has been included for culverts for drainage and pipe crossings;
- **Turbine Foundations:** Based upon the proposed tip heights it is estimated a typical gravity foundation design will require up to 1200 m³ of concrete and 162 tonnes of steel reinforcement. The HGV movements required for steel reinforcement delivery would apply to both scenarios;
 - Scenario 1: it is envisaged that concrete for the foundation will be batched on-site. Due to the risks associated with the logistics, travel time and criticality of foundation concrete, it is considered unlikely ready-mix concrete will be adopted for the project. In this scenario importing will be dry materials only with aggregate assumed as site won and water for mixing sourced naturally on-site; and
 - Scenario 2: In order to present a worst-case this assessment assumes ready-mix concrete;
- **Turbine Tower Sections:** Turbines with a hub height of up to 175 m would most likely be hybrid towers. This is due to the diameter of lower tower sections being approximately six meters which is in excess of what can be transported along the trunk road network where structures are present. The top two steel tower sections will be transported as AILs with the lower comprising concrete sections delivered by HGV;
- **Turbine Abnormal Loads:** For the size of turbines being considered for the site, the abnormal loads will consist of 3 blade deliveries, up to 5 steel tower section deliveries, 1 nacelle delivery and 1 hub delivery (10 abnormal load deliveries per turbine). The transport of abnormal loads is undertaken by specialist vehicles designed and manufactured for the purpose of wind turbine component delivery. These vehicles are designed such that following delivery, they can reduce to a standard HGV size. Hence, although they arrive to site as an abnormal load, they leave as a standard HGV. The number of the abnormal load movements has been included within the assessment of general construction traffic to ensure a robust assessment including all vehicles. The effects of abnormal load deliveries are quite different to those attributed to general construction traffic and hence these specific effects have also been assessed separately;
- **Turbine Assembly:** Around 4 HGV deliveries for items that will be fitted within the turbines would be required for each turbine. The cranes (larger 1000 tonne and smaller 500 tonne crane) for assembling the wind turbines will be brought to site at the start of turbine assembly and remain on site until completion;
- **Meteorological Masts:** The meteorological masts (if installed) would consist of a concrete foundation (around 200 m³) and lattice tower. The timing of constructing the meteorological mast foundation is very flexible and may not be undertaken during the turbine foundation pours when the batching plant is on site. Therefore, a conservative approach has been adopted and assumed the concrete for the meteorological mast foundation would be delivered by ready mix lorries;
- **Substation and associated Construction Compound/ Battery Storage area (excluding platform):** The substation will consist of a crushed stoned hardstand area and building to house

the wind farm electrical and grid connection equipment and basic office facilities for maintenance staff. Battery storage is also proposed on the substation site. HGV values for the delivery of the stone to form the platforms is included in ‘Site Tracks, Crane Pads and Compounds’ above. Material, such as concrete blocks, roof trusses, roof cladding and windows/doors for the substation building as well as the electrical equipment will need to be brought to site. The battery storage may consist of 15 number battery containers (similar to shipping containers) and 14 power conversion ‘skids’ which will be transported by HGV;

- **Cable Installation:** Cable installation includes the Low Voltage (LV) electrical cables, supervisory cables and data acquisition (SCADA) signalling/control cables and sand associated with the cable bedding and surround in the cable trench. Depending on the ground conditions encountered, it is possible that the sand could be sourced from site borrow pits, however, this is uncommon on wind farm construction and hence sand is assumed to be imported;
- **Demobilisation / Site Reinstatement:** Reinstatement of all construction phase working areas, removal of all plant from site; and
- **Transport of site personnel:** Approximately 40-80 car/van movements per day would be required for the construction personnel and any small deliveries, based on worst-case assumptions of no car sharing. These have also been included in the assessment.

11.6.10 Table 11.7 summarises the HGV movements for the expected construction phase.

Table 11.7: Estimated HGV construction traffic volumes

Item	Load Size	HGV Movements Scenario 1	HGV Movements Scenario 2	Notes
Mobilisation to Site		142	142	At start of construction. Demobilisation will occur partially following completion of earthworks, with the remainder following completion of the project.
Forestry	30 m³	2054	2054	
AIL Enabling Works	20 t	2328	2600	Scenario 1 assumes all stone sourced from onsite borrow pits. Scenario 2 assumes the top 150 mm layer of stone is imported.
Site Tracks, Crane Pads and Compounds	20 t	0	7496	Scenario 1 assumes all stone sourced from onsite borrow pits. Scenario 2 assumes the top 150 mm layer of stone is imported.
Geogrids and Culverts	20 t	54	54	
Turbine Foundations (Concrete)	20t / 6 m³	6398	7200	Based upon a 1200 m³ foundation Scenario 1 assumes import of material for onsite batching. Scenario 2 assumes import of ready-mix concrete.

Item	Load Size	HGV Movements Scenario 1	HGV Movements Scenario 2	Notes
Turbine Foundations (Steel)	20 t	390	390	
Turbine Concrete Tower Sections		224	224	For towers up to 175 m hub height only, remaining tower sections will be AIL.
Turbine Abnormal Loads		192	192	These are included in the HGV numbers although referred to as abnormal loads.
Turbine Assembly		288	288	HGVs at start and end of turbine assembly for crane mob/de-mob. HGVs throughout turbine assembly period.
Meteorological Mast	6 m³	160	160	
Substation, including Battery Storage		584	584	
Cable Installation		1726	1726	Sand imported.
Demobilisation / Site Reinstatement		142	142	

11.6.11 Table 11.8 summarises the total traffic movements generated by the proposed development which will be assessed against the baseline traffic flow figures for the A4107, B4282, A4063 and Goytre Road over the proposed 24-month construction period.

Table 11.8: Total traffic movements generated (generated from Tables 11.10, 11.11 and 11.12)

	Scenario 1	Scenario 2
HGV movements, including AILs, excluding ready mix concrete movements	14,682	16,052
Light personnel and LGV movements	32,894	32,894
HGV ready-mix concrete movements	0	7,200
Total	47,576	56,146


11.6.12 It is expected that the highest average daily HGV movements will occur in month 5 under scenario 1 and month 4 under scenario 2, see Table 11.9.

Table 11.9: Peak average daily movements


	Month 4		Month 5	
	Scenario 1	Scenario 2	Scenario 1	Scenario 2
HGV movements	44	76	68	74

	Month 4		Month 5	
	Scenario 1	Scenario 2	Scenario 1	Scenario 2
LGV movements	72	72	92	92
Total movements	116	148	160	166

11.6.13 Charts 11.1 and Chat 11.2 illustrate this distribution of traffic over the 24-month construction period. Scenario 1: Expected Case includes for the delivery of materials required through the construction period for the on-site batching of concrete. Scenario 2: Worst Case; the turbine foundation numbers only include for reinforcement deliveries as it is not considered appropriate to simply distribute HGV numbers for ready-mix concrete pours for the foundations over a month duration. Concrete pours for turbine foundations typically take place over a single day and hence the estimated 1200 m³ of concrete for a foundation would be delivered by HGVs within typically a 10–12-hour period. Therefore, the effect of this is discussed separately in paragraph 11.6.23.

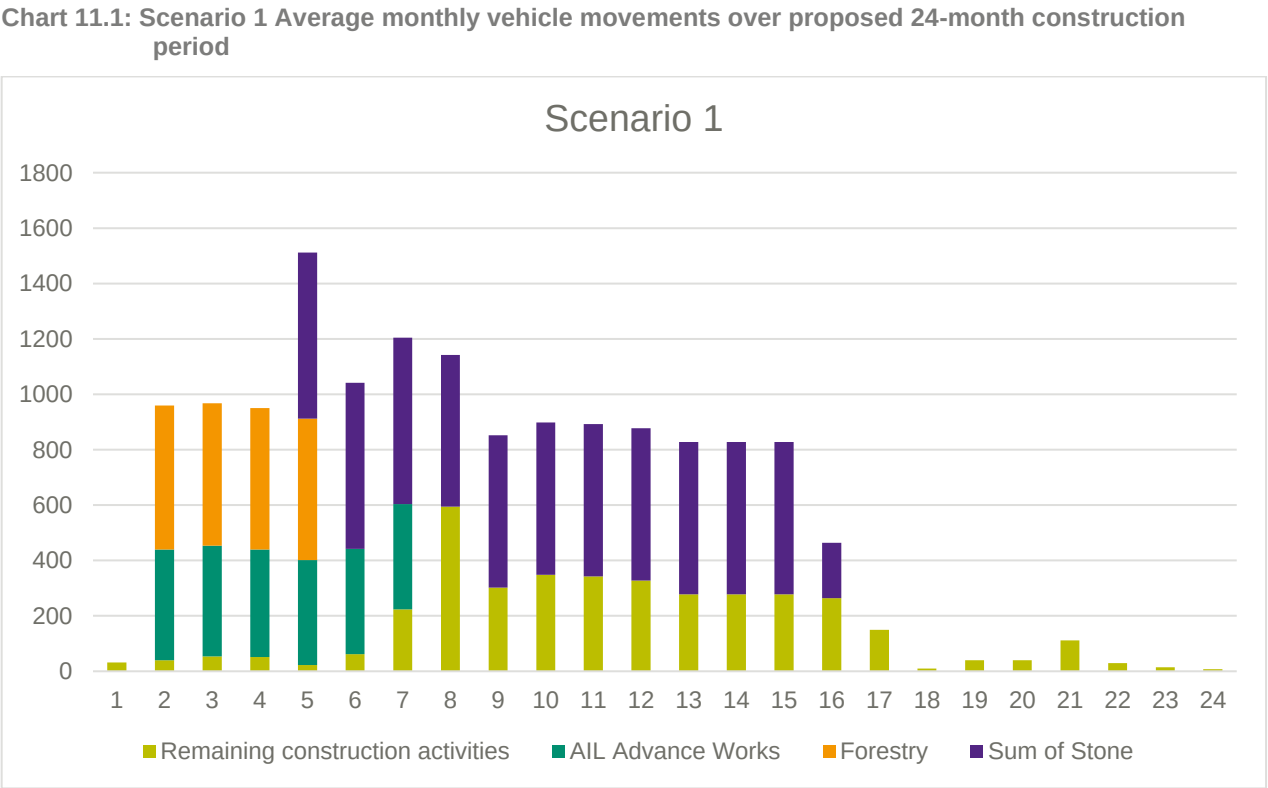

Source: Natural Power

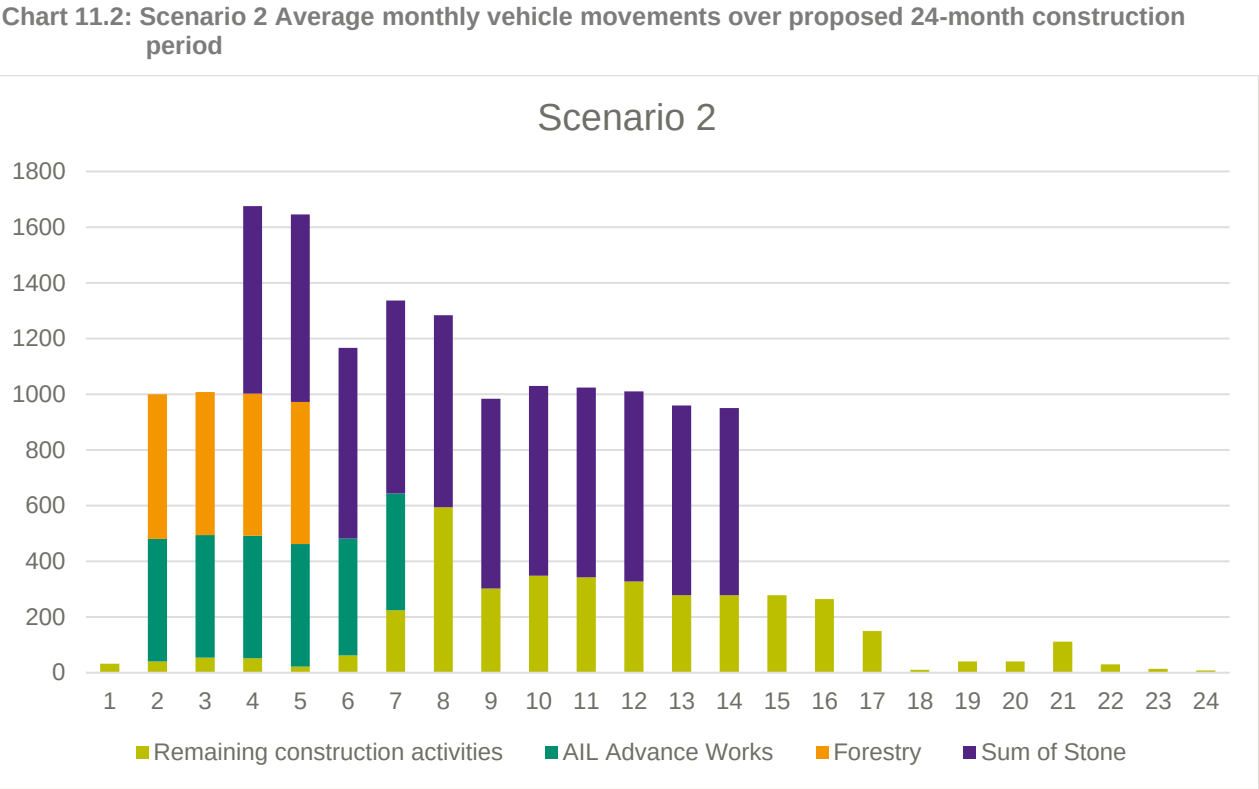

Source: Natural Power

Table 11.10: Predicted vehicle movements during the construction period (HGVs and abnormal loads)

Activity	Month																									
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Total	
Heavy Goods Vehicles Movements (including abnormal loads)																										
Mobilisation to site	32	40	40	30																					142	
Forestry		520	514	510	510																				2054	
AIL Enabling Works		400 (440)	400 (440)	388 (440)	380 (440)	380 (420)	380 (420)																		2328 (2600)	
Access / site tracks				0 (270)	0 (270)	0 (270)	0 (280)	0 (280)	0 (280)	0 (280)	0 (280)	0 (280)	0 (280)	0 (270)											0 (3040)	
Geogrids & Culverts				8	8	8	10	10	10																54	
Cabling							160	160	160	160	160	160	160	160	160	146	140								1726	
Crane Hard-Standing				0 (250)	0 (250)	0 (260)	0 (260)	0 (258)	0 (250)	0 (250)	0 (250)	0 (250)	0 (250)	0 (250)											0 (2778)	
Substation, Energy Compound and all Misc Hardstands				0 (154)	0 (154)	0 (154)	0 (152)	0 (152)	0 (152)	0 (152)	0 (152)	0 (152)	0 (152)	0 (152)											0 (1678)	
Substation			14	14	14	14	14	14	16	16	16	16	16	16	16	16									212	
Energy storage compound											62	62	62	62	62	62									372	
Wind monitoring equipment										56	54	50													160	
Turbine foundations (Steel)						40	40	40	40	40	40	30	30	30	30	30									390	
Turbine Foundation (Concrete)					600 (0)	600 (0)	600 (0)	548 (0)	550 (0)	550 (0)	550 (0)	550 (0)	550 (0)	550 (0)	550 (0)	200 (0)									6398 (0)	
Crane Delivery / Demobilisation								72													72				144	
Turbine Precast Concrete Tower Deliveries								224																	224	
Turbine Abnormal Loads								64	64	64															192	
Turbine Assembly								10	12	12	10	10	10	10	10	10	10	10	10	10	10				144	
Site Reinstatement / Demobilisation																			30	30	30	30	14	8	142	
Monthly HGV Total Movements																										
Scenario 1 - Stone is majority site won with on-site batching	32	960	968	950	1512	1040	1204	1142	852	898	892	878	828	828	828	464	150	10	40	40	112	30	14	8	14682	
Scenario 2 - Import of running layer	32	1000	1008	1676	1646	1166	1336	1284	984	1030	1024	1010	960	950	278	264	150	10	40	40	112	30	14	8	16052	

Table 11.11: Predicted vehicle movements during the construction period (light vehicles)

Light Vehicle Movements (car, minibuses and small van deliveries)																									
Month	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Total
Forestry LGV	0	380	300	300	300	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1280
General Construction Traffic	866	866	1300	1300	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	866	866	866	866	434	434	434	31614
Monthly total LGV Movements	866	1246	1600	1600	2032	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	1732	866	866	866	866	434	434	434	32894

Table 11.12: Scenario 1 and Scenario 2 total vehicle movements

Scenario 1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Total
Monthly Total Vehicle Movements	898	2206	2568	2550	3544	2774	2936	2874	2584	2630	2624	2610	2560	2560	2560	2196	1882	876	906	906	978	464	448	442	47576
Average Daily Movements (assumes 5 working days per week)	40.8	100.3	116.7	115.9	161.1	126.1	133.5	130.6	117.5	119.5	119.3	118.6	116.4	116.4	116.4	99.8	85.5	39.8	41.2	41.2	44.5	21.1	20.4	20.1	
Average Daily HGV Movements (assumes 5 working days per week)	1.5	43.6	44.0	43.2	68.7	47.4	54.7	51.9	38.7	40.8	40.5	39.9	37.6	37.6	37.6	21.1	6.8	0.5	1.8	1.8	5.1	1.4	0.6	0.4	
Scenario 2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	Total
Monthly Total Vehicle Movements	898	2246	2608	3276	3678	2898	3068	3016	2716	2762	2756	2742	2692	2682	2010	1996	1882	876	906	906	978	464	448	442	48946
Average Daily Movements (assumes 5 working days per week)	40.8	102.1	118.5	148.9	167.2	131.7	139.5	137.1	123.5	125.5	125.3	124.6	122.4	121.9	91.4	90.7	85.5	39.8	41.2	41.2	44.5	21.1	20.4	20.1	
Average Daily HGV Movements (assumes 5 working days per week)	1.5	45.5	45.8	76.2	74.8	53.0	60.7	58.4	44.7	46.8	46.5	45.9	43.6	43.2	12.6	12.0	6.8	0.5	1.8	1.8	5.1	1.4	0.6	0.4	

Note 1: Brackets indicate numbers under Scenario 2: Worst Case

Note 2: The distributed turbine foundation numbers under Scenario 2 include only for reinforcement as it is not considered appropriate to distribute/average ready-mix concrete deliveries over a monthly basis as each pour would be undertaken in a day.

Distribution of Construction Traffic

11.6.14 Consideration is given to the likely distribution of construction traffic from material/supply sources to the proposed development. There are various stone and concrete suppliers located in proximity. Even for those sources located to the east of the proposed development, it is considered most likely that they will travel along the M4 to site and therefore will exit at Junction 40, rather than departing at Junction 36 and travelling north via Maesteg.

11.6.15 It is proposed that a purpose built diverge slip road be constructed directly from the M4 for the AIL load delivery. Therefore, it is considered that 100% of AIL delivery traffic will enter the south section via Access Point 1, with then 38% using Access Point 2 to enter the north section.

Screening

11.6.23 Applying the distribution of traffic as noted in Paragraph 11.6.17, the resultant percentage increase in traffic versus the baseline is indicated in Table 11.13, over the 24-month construction duration for the total vehicles and HGV vehicles.

Table 11.13: Estimated percentage increases in traffic over construction period for both scenarios

Scenario 1	Construction Month																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Highway Link	% Increase in Total Traffic																							
A	0.9	2.2	2.6	2.5	3.5	2.8	2.9	2.9	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.2	1.9	0.9	0.9	0.9	1.0	0.5	0.4	0.4
B	0.3	0.9	1.0	1.0	1.4	1.1	1.2	1.2	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.7	0.3	0.3	0.3	0.4	0.2	0.2	0.2
C	0.1	0.3	0.4	0.4	0.5	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.1	0.1	0.1	0.1	0.1	0.1	0.1
D	0.2	0.5	0.6	0.6	0.8	0.6	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.4	0.3	0.1	0.2	0.2	0.2	0.1	0.1	0.1
E	0.1	0.2	0.3	0.3	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0
Highway Link	% Increase in HGV Traffic																							
A	0.3	9.3	9.3	9.2	14.6	10.1	11.6	11.0	8.2	8.7	8.6	8.5	8.0	8.0	8.0	4.5	1.4	0.1	0.4	0.4	1.1	0.3	0.1	0.1
B	0.2	5.8	5.9	5.8	9.2	6.3	7.3	6.9	5.2	5.5	5.4	5.3	5.0	5.0	5.0	2.8	0.9	0.1	0.2	0.2	0.7	0.2	0.1	0.0
C	0.1	2.3	2.4	2.3	3.7	2.5	2.9	2.8	2.1	2.2	2.2	2.1	2.0	2.0	2.0	1.1	0.4	0.0	0.1	0.1	0.3	0.1	0.0	0.0
D	0.1	2.9	3.0	2.9	4.6	3.2	3.7	3.5	2.6	2.7	2.7	2.7	2.5	2.5	2.5	1.4	0.5	0.0	0.1	0.1	0.3	0.1	0.0	0.0
E	0.1	2.2	2.2	2.2	3.4	2.4	2.7	2.6	1.9	2.0	2.0	2.0	1.9	1.9	1.9	1.1	0.3	0.0	0.1	0.1	0.3	0.1	0.0	0.0

11.6.16 The Construction TMP will aim to control the HGV routes as far as reasonably practicable to ensure minimal disruption is caused.

11.6.17 The distribution of construction traffic routes to each access point, see Figure 11.1, for both HGVs and LGVs is assumed as:

11.6.18 55% of total construction traffic would use access point 2 via Link A and Link B;

11.6.19 40% of total construction traffic would use access point 2 via Link C and Link D;

11.6.20 5% of total construction traffic would use access point 3 via Link E;

11.6.21 no HGVs or LGVs will be permitted to enter Access Point 1; and

11.6.22 No vehicles will be permitted to egress from Point 1.

Scenario 2	Construction Month																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
Highway Link	% Increase in Total Traffic																							
A	0.9	2.2	2.6	3.3	3.7	2.9	3.0	3.0	2.7	2.7	2.7	2.7	2.7	2.7	2.0	2.0	1.9	0.9	0.9	0.9	1.0	0.5	0.4	0.4
B	0.3	0.9	1.0	1.3	1.5	1.2	1.2	1.2	1.1	1.1	1.1	1.1	1.1	1.1	0.8	0.8	0.7	0.3	0.3	0.3	0.4	0.2	0.2	0.2
C	0.1	0.3	0.4	0.5	0.5	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.1	0.1	0.1	0.1	0.1	0.1	0.1
D	0.2	0.5	0.6	0.8	0.9	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.4	0.4	0.3	0.1	0.2	0.2	0.2	0.1	0.1	0.1
E	0.1	0.2	0.3	0.3	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.0	0.0	0.0
Highway Link	% Increase in HGV Traffic																							
A	0.3	9.6	9.7	16.1	15.8	11.2	12.8	12.3	9.5	9.9	9.8	9.7	9.2	9.1	2.7	2.5	1.4	0.1	0.4	0.4	1.1	0.3	0.1	0.1
B	0.2	6.0	6.1	10.1	10.0	7.1	8.1	7.8	6.0	6.2	6.2	6.1	5.8	5.7	1.7	1.6	0.9	0.1	0.2	0.2	0.7	0.2	0.1	0.0
C	0.1	2.4	2.4	4.1	4.0	2.8	3.2	3.1	2.4	2.5	2.5	2.4	2.3	2.3	0.7	0.6	0.4	0.0	0.1	0.1	0.3	0.1	0.0	0.0
D	0.1	3.0	3.1	5.1	5.0	3.6	4.1	3.9	3.0	3.1	3.1	3.1	2.9	2.9	0.8	0.8	0.5	0.0	0.1	0.1	0.3	0.1	0.0	0.0
E	0.1	2.3	2.3	3.8	3.7	2.6	3.0	2.9	2.2	2.3	2.3	2.3	2.2	2.1	0.6	0.6	0.3	0.0	0.1	0.1	0.3	0.1	0.0	0.0

Note: Highlighted cells indicate those months where the threshold (see Paragraph 11.4.8) has been exceeded

11.6.24 Assessing against the criteria in Paragraph 11.4.8 none of the routes exceed the rule 1 threshold. Link A exceeds the rule 2 threshold of 10% increase in HGV traffic in Scenario 1, while Link A and Link B exceed the rule 2 threshold in Scenario 2, see Table 11.2. Based on the outcome of Scenario 2, both of the links have been taken forward for further assessment. Referring to Table 11.2, the magnitude of effect of the traffic flow increase on Links C, D and E is considered to be **Negligible** in both Scenario 1 and Scenario 2 and no further assessment is required. However, due to the understood sensitivity around the use of Link E, Goytre Road, Link E has been taken forward for assessment despite not being a requirement.

Table 11.14: Months during which Rule 2 Threshold is exceeded

Location	Scenario 1	Scenario 2
Link A	Months 5 – 8	Months 4 – 8
Link B	Not exceeded	Months 4 – 5
Link E	Not exceeded	Not exceeded

Magnitude of Impact

11.6.25 Paragraph 11.6.24 identified Links A and B as highway links requiring more detailed assessment. Link E has been taken forward due to known sensitivities in the area. As identified in Table 11.15 the percentage increase in HGV traffic exceeded the thresholds with associated magnitude of impact as indicated in Table 11.2.

Table 11.15: Magnitude of Impact

Highway Link	Scenario	Maximum increase in HGV traffic flows	Magnitude of Impact
Link A	1	15 %	Negligible
	2	16 %	Negligible
Link B	1	9 %	Negligible
	2	10%	Negligible
Link E	1	4 %	Negligible
	2	4%	Negligible

11.6.26 It can be seen in Table 11.15 that the resultant magnitude of impact for each Link is the same in both Scenarios. Whilst the increase in traffic movements differs between the two scenarios, the resultant magnitude of impact does not. As such, **the assessment continues using the Scenario 2 magnitude of impact.**

Magnitude of Turbine Foundation Concrete Pours

11.6.27 As noted earlier, the above Scenario 2 numbers do not include for the concrete foundation pours. For a 1,200 m³ foundation it is anticipated 200 HGV deliveries (400 movements) will be required over a single 10–12-hour period. Depending upon the turbine location and availability of batching plants any of the access routes may be used for the delivery. Each route has been assessed based on an assumption of carrying 100% of the HGV deliveries. The results of this sensitivity assessment are noted in Table 11.16 with the resultant percentage increase to Average Daily Traffic (ADT)

which occurs during this activity. With 18 foundations, this increase in traffic could occur on some of these links on 18 separate days over the 24 month foundation construction period.

Table 11.16: Traffic increase during turbine foundation pours

Location	Turbine Foundation Pour Movements	Resultant increase of total traffic as %	Resultant increase of HGV traffic as %	Magnitude of Impact
Link A	400	16 %	154 %	High
Link B	400	7 %	97 %	High
Link C	400	3 %	53 %	Low
Link D	400	7 %	67 %	Medium
Link E	400	19 %	398%	High

11.6.28 Although the impacts resulting from the turbine foundation concrete pours are infrequent and over a very short period, the concrete foundation pours have been taken forward for further assessment.

11.7 DETAILED ASSESSMENT OF EFFECTS

11.7.1 This section assesses the resulting environmental effects for receptors requiring detailed assessment in accordance with Rules 1 and 2 of the IEMA Guidelines, that is highway links where traffic flows would increase by more than 30% and/or sensitive areas where traffic flows would increase by 10% or more.

11.7.2 As identified in Paragraph 11.6.24, Link A and B were identified as meriting further detailed assessment, and Link E was also taken forward due to the sensitivity of Goytre Road.

11.7.3 The effect of the turbine concrete foundation pours and the abnormal loads have also been assessed in further detail.

Identification and Assessment of Receptor Sensitivity

11.7.4 A detailed assessment to identify the receptors and assess their sensitivity on each of the highway links has been undertaken. Table 11.17 details the assessment of the sensitivity (L = Low, M = Medium, H = High) for the receptors identified on the applicable highway links.

Table 11.17 Receptor sensitivity assessment

Receptor Description	Impact	L	M	H	Rationale
Public Road Network and Users					
Link A A4107 to Junction with B4282	Driver Delay	X			No capacity issues raised.
	Cyclist Amenity	X			No cycle provisions however alternative traffic-free route available adjacent to link on the National Cycle Network.
	Safety	X			Local road with junctions and bends, no fatal accidents recorded within previous 5 years.
	Road Structure	X			Two lane local road in good condition with reasonably good geometry.

Receptor Description	Impact	L	M	H	Rationale
Link B B4282 Junction with A4107 to Access Point 2	Driver Delay	X			No capacity issues raised.
	Cyclist Amenity	X			No cycle provisions currently available.
	Safety		X		Local road with junctions and bends, a fatal and serious accident have been recorded within previous 5 years, however with the inclusion of embedded mitigation such as HGV movements outside of peak times and provision of signage the sensitivity is reduced.
	Road Structure	X			Two lane local road in good condition with reasonably good geometry, reduced speed limit along lengths.
Link E Goytre Road to Access Point 5	Driver Delay			X	Limited capacity to absorb increase in traffic due to on-street parking, restricted carriageway width at cemetery and reduced carriageway width to north of Goytre with no passing places.
	Cyclist Amenity	X			
	Safety		X		Minimum cycle activity.
	Road Structure		X		No fatal accidents within 5 years.
Local Settlements					
Bryn	Severance	X			Reasonable pedestrian facilities including narrow footpaths on one side or both, bus stops and a pedestrian crossing. Pedestrian guardrail located on junctions. On street parking and residential properties fronting road. Reduced speed limit to 20 mph through Bryn.
	Pedestrian Delay	X			
	Pedestrian Amenity	X			
	Pedestrian Fear and Intimidation	X			
	Safety				
Cwmafan	Severance	X			Reasonable pedestrian facilities including wide footpaths, bus stop and pedestrian crossings. Residential properties fronting road.
	Pedestrian Delay	X			
	Pedestrian Amenity	X			
	Pedestrian Fear and Intimidation	X			
	Safety	X			
Caerhendy	Severance	X			Limited pedestrian facilities with footpaths on one side. On street parking. Residential properties in elevated position from road.
	Pedestrian Delay	X			
	Pedestrian Amenity	X			
	Pedestrian Fear and Intimidation	X			
	Safety	X			
Llettyharri	Severance	X			Reasonable pedestrian facilities through north end of settlement including wide footpaths on
	Pedestrian Delay	X			

Receptor Description	Impact	L	M	H	Rationale
	Pedestrian Amenity	X			both sides and bus stop. Residential properties fronting road and on street parking. South end of settlement minimum pedestrian facilities. Residential properties elevated from road, on street parking. With the inclusion of embedded mitigation such as HGV movements being restricted to outside of peak hours and signage to advise of priority, the sensitivity is reduced.
	Pedestrian Fear and Intimidation	X			
	Safety		X		
Pen-y-cae	Severance	X			Reasonable pedestrian facilities including wide footpaths and bus stop. Footpaths on one side and both sides. Residential properties fronting road, on street parking. With the inclusion of embedded mitigation such as HGV movements being restricted to outside of peak hours and signage to advise of priority, the sensitivity is reduced.
	Pedestrian Delay	X			
	Pedestrian Amenity	X			
	Pedestrian Fear and Intimidation	X			
	Safety		X		
Goytre	Severance		X		Reasonable pedestrian facilities including wide footpaths on both sides, bus stops and traffic calming with pedestrian crossings. On street parking and residential properties fronting road on both sides.
	Pedestrian Delay		X		
	Pedestrian Amenity		X		
	Pedestrian Fear and Intimidation			X	
	Safety			X	

Assessment of Construction Phase Effects

11.7.5 Synthesising the magnitude and sensitivity provides the resultant significance for these highway links and associated receptors and is reported in Table 11.18.

Table 11.18: Assessment of construction effects

Receptor Description	Impact	Duration	Magnitude	Sensitivity	Effect	Significance
Public Road Network and Users						
Link A A4107 to Junction with B4282	Driver Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Cyclist Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Safety	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Road Structure	Temporary	Negligible	Low	Minor / Negligible	Not significant
Link B	Driver Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant

Receptor Description	Impact	Duration	Magnitude	Sensitivity	Effect	Significance
B4282 Junction with A4107 to Access Point 2	Cyclist Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Safety	Temporary	Negligible	Medium	Minor	Not significant
	Road Structure	Temporary	Negligible	Low	Minor / Negligible	Not significant
Link E Goytre Road to Access Point 5	Driver Delay	Temporary	Negligible	High	Moderate / Minor	Not significant
	Cyclist Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Safety	Temporary	Negligible	Medium	Minor	Not significant
	Road Structure	Temporary	Negligible	Medium	Minor	Not significant
Local Settlements						
Bryn (Link B)	Severance	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Fear and Intimidation	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Safety	Temporary	Negligible	Low	Minor / Negligible	Not significant
Cwmafan (Link A)	Severance	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Fear and Intimidation	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Safety	Temporary	Negligible	Low	Minor / Negligible	Not significant
Caerhendy (Link A)	Severance	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant

Receptor Description	Impact	Duration	Magnitude	Sensitivity	Effect	Significance
	Pedestrian Fear and Intimidation	Temporary	Negligible	Low	Minor / Negligible	Not Significant
	Safety	Temporary	Negligible	Low	Minor / Negligible	Not Significant
Llettyharri (Link A)	Severance	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Fear and Intimidation	Temporary	Negligible	Low	Minor / Negligible	Not Significant
	Safety	Temporary	Negligible	Low	Minor / Negligible	Not Significant
Pen-y-cae (Link A)	Severance	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Delay	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Amenity	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Pedestrian Fear and Intimidation	Temporary	Negligible	Low	Minor / Negligible	Not significant
	Safety	Temporary	Negligible	Low	Minor / Negligible	Not significant
Goytre (Link E)	Severance	Temporary	Negligible	Medium	Minor	Not significant
	Pedestrian Delay	Temporary	Negligible	Medium	Minor	Not significant
	Pedestrian Amenity	Temporary	Negligible	Medium	Minor	Not significant
	Pedestrian Fear and Intimidation	Temporary	Negligible	High	Moderate / Minor	Not significant
	Safety	Temporary	Negligible	High	Moderate / Minor	Not significant

11.7.6 Only effects which are Major and Major / Moderate are considered significant. With reference to Table 11.18, the highest significance is Moderate / Minor.

Assessment of Turbine Foundation Concrete Pours Effect

- 11.7.7 Table 11.15 noted the magnitude of impact for each of the highway links to be High when used during turbine foundation pours (Scenario 2: ready-mix concrete).
- 11.7.8 With 18 foundations, this increase in traffic will occur on 18 separate days over the eight-month foundation construction period, equating to less than three days per month. The affected links will change based upon the turbine foundation location in the proposed development, meaning no link will experience the increase in ready mix concrete trucks on all 18 occasions. Given the criticality of the foundation pours and the number of HGV movements involved it is expected no other site works will be undertaken on a foundation pour day to ensure concrete deliveries through the site road network remain un-interrupted.
- 11.7.9 Import of concrete for the turbine foundations has been adopted for the project under Scenario 2 to consider a worst-case scenario. Due to the risks associated with the logistics, travel time and criticality of foundation concrete, it is considered unlikely ready-mix concrete will be adopted for the project and the application includes for an on-site batching plant for these reasons.
- 11.7.10 Should the import of ready-mix concrete be adopted for the project then the receptor sensitivity for each highway link is considered to be Medium. With the magnitude of impact of High, based upon the assessment criteria in Table 11.5 the resultant effect associated would be considered to be significant.

Assessment of Abnormal Load Transportation

- 11.7.11 The abnormal load numbers are included within the assessment to ensure a robust appraisal including all vehicles. It is however important to consider the effect of these particular vehicles in isolation, as the effects are different to those attributed to general construction traffic.
- 11.7.12 The methodology set out in the IEMA Regulations defines the traffic effects as a function of the increase in traffic flows. In Natural Powers' professional opinion, such a methodology does not fully address the effects of abnormal load deliveries as the number of abnormal loads is typically quite low and therefore does not trigger volume increases in traffic requiring assessment.
- 11.7.13 The primary impact associated with the transportation of abnormal loads is considered to be driver delays on other road users. The other impacts (i.e. severance, pedestrian, delay, safety, etc) are not considered to merit further detailed assessment as:
- The duration of an abnormal load delivery through/passing the settlement is so short (i.e. a timescale of minutes);
 - A significant level of preparation goes into planning these deliveries with the police and local authorities and the management/control measures in place during the delivery (i.e. police escorts, etc);
 - Prior to any abnormal load delivery, the structural capacity of the road and bridges/culverts would be assessed, and any strengthening works implemented. The necessary permits to deliver abnormal loads would not be released from the relevant road authorities until they are satisfied that this aspect has been fully addressed; and

- Prior to any abnormal load delivery, a trial run of the route is undertaken to confirm the abnormal loads can negotiate the route.
- 11.7.14 As part of the ES an AIL Route Survey was undertaken to assess the abnormal load delivery route from Swansea to the proposed development (refer to Appendix 11.2) and the key findings are:
- 5 pinch points are identified requiring further consideration ranging from contra-flow manoeuvres through junctions to clearance of vegetation to negotiate the pinch point;
 - A new diverge slip road will only be available for inbound abnormal load traffic and will be controlled by a trunk road agent approved contractor. The diverge has been designed to ensure that loads do not oversail live carriageway lanes, see Appendix 11.2; and
 - The AIL Route Survey concludes that various road modifications, structural reviews and interventions are required to successfully access the site. If these are undertaken, access to the consented wind farm site is considered feasible.
- 11.7.15 The transportation of abnormal loads requires careful planning in consultation with the local planning authority and South Wales Police. The anticipated distribution of abnormal loads indicates that abnormal loads delivery will occur over a (non-consecutive) 12-week period with a peak vehicle movement of two AIL components delivered per convoy, with two convoys being transported each night.
- 11.7.16 During the period when the loads are being transported there is potentially some effect on driver delays. This effect is increased at junction locations where vehicles in both directions will be required to wait until each load has negotiated the obstacle. There are sections where the abnormal load will use both carriageways while negotiating a pinch point or narrow sections of the road. This possible cause for journey delay to other road users will occur along the route from port to site.
- 11.7.17 Discussions with South Wales Police will determine the likely traffic management arrangements for these vehicle movements. These will be incorporated into the construction programme and the TMP to be produced by the contractors will be agreed with the relevant road authorities and South Wales Police prior to commencement of construction. The important details required to be established within the TMP will include determining an acceptable time for transporting abnormal loads and the number of loads it may be possible to transport at one time. It has been assumed that each abnormal load will require an escort of two police vehicles and one haulage company escort vehicle.
- 11.7.18 Careful management of the timing of the abnormal loads and management of the traffic during abnormal load delivery will minimise driver delay. Refer to Appendix 11.2 for estimates on driver delay which is expected.
- 11.7.19 Proactive communication with the local community and road users on the delivery arrangements, dates and timings of the abnormal load deliveries will also provide advance warning to residents on the route and frequent road users. This will enable them to plan their journeys and avoid abnormal load delivery times if possible.

- 11.7.20 Given the short period for the delivery, the short duration of potential delays and the various mitigation options available to manage these, in Natural Power's professional opinion it is considered the effect on driver delay is considered not significant.

11.8 MITIGATION

- 11.8.1 As noted previously, the assessment includes for embedded mitigation delivered through the TMP.
- 11.8.2 Where no effects were assessed as Major or Major / Moderate significance, no further impact mitigation measures are required.

Impact Mitigation

Turbine Foundation Concrete Pours

- 11.8.3 Turbine Foundation Concrete Pours effects applicable to Scenario 2: Worst case; were considered significant by the assessment, and this section details the measures proposed to mitigate the impacts.
- 11.8.4 It is recognised that importing concrete for turbine foundation pours (ready mix) will have an impact due to the large numbers of HGVs required and concentrated within a 10–12-hour period, despite this being an infrequent event (i.e., only 18 times over an 8-month period) distributed across the highway links.
- 11.8.5 The most important mitigation measure will be the proactive consultation with the local community to provide advance warning of when concrete pours are scheduled. The detail of how this information is delivered to the local community will be agreed as part of the TMP. As a minimum it is expected to include signage on the road to be used advising of dates for concrete pours well in advance of the scheduled dates and direct notification (i.e. letter drops, face to face, SMS) to the individual properties ahead of concrete pours.
- 11.8.6 With the incorporation of the above impact mitigation measures the sensitivity of concrete deliveries associated with the wind turbine foundations will be reduced to Low. Based upon the criteria in Table 11.4 the resultant effect is Moderate which is considered not significant.

11.9 CUMULATIVE EFFECTS INCLUDING NON-WIND

- 11.9.1 Other developments in the areas served by the roads assessed herein may generate their own construction, operational and decommissioning traffic (other wind farms, new urban development, shopping centres, quarries, forestry, etc.). The greatest changes in traffic associated with the proposed development will be short term, occurring during the construction phase.
- 11.9.2 Natural Power reviewed the list of cumulative developments, including non-wind, to determine if any fell within the zone of influence for traffic and transport. The zone of influence was defined as developments which assumed the use of the same links as would be utilised by the proposed development and would result in an increased traffic movement on those links. The process scoped out all developments with the exception of proposed development Wildfox Resort.
- 11.9.3 It is estimated that for a duration of 6 months both the proposed development and Wildfox Resort construction phases would overlap, with both contributing to traffic on the A4063. The consented

Wildfox Resort has not assessed the construction phase traffic volumes and therefore no construction data is available to inform the HGV movements anticipated for the Wildfox Resort development.

- 11.9.4 However, construction traffic data relating to the Wildfox Resort would increase our baseline numbers resulting in a reduced impact being found for traffic movement associated with the proposed development. Therefore, Natural Power have not included these traffic figures in the assessment to ensure a conservative approach to the potential traffic impacts.
- 11.9.5 It is accepted that if other future developments were to coincide with that of the proposed development and was considered to have an unacceptable joint impact, then discussions would be held between developers and other relevant parties (in conjunction with the roads authorities) prior to the commencement of the projects, with a view to mitigating any such effects. The measures to be adopted would be enshrined in a robust TMP applying to each development, to ensure that any cumulative effects were avoided (e.g. by staging of deliveries and construction phasing).

11.10 CONCLUSIONS

- 11.10.1 The traffic and transport assessment has assessed the traffic impacts associated with the proposed development. The assessment considered the most likely construction methods, programme and sequencing of two scenarios against baseline traffic conditions: both a realistic scenario using site won stone, with the exception of stone being imported for turbine foundation concrete, along with use of on-site batching plants (scenario 1) and a worst-case scenario which assumes the top 150 mm layer of all stone would need to be imported onto site and all foundation concrete would need to be brought to site in ready mix lorries (scenario 2).
- 11.10.2 The traffic impacts associated with the turbine foundation concrete pour required under Scenario 2 was assessed along with Abnormal Load deliveries. An AIL Route Survey, including swept path analysis at particular locations was also prepared demonstrating the viability of the proposed abnormal load route and is included as an appendix to this chapter (Appendix 11.2).
- 11.10.3 The assessment concludes that, with the incorporation of embedded mitigation measures and impact mitigation measures secured through a construction TMP, there will be no resultant significant traffic effects associated with the proposed development.
- 11.10.4 A preliminary TMP (HGVs/LGVs) has been prepared and included as an appendix to this chapter (Appendix 11.1). The assessment is based on a number of conservative assumptions around the construction programme/sequencing, source of stone and concrete deliveries. These assumptions can only be clarified post consent. Hence it is expected a planning condition will be applied to the development for a final construction TMP to be prepared and approved by NPTCBC and BCBC post consent and prior to construction works commencing.
- 11.10.5 In relation to potential cumulative impacts, these would be dependent on whether other developments are constructed concurrently. If the construction of the proposed development coincided with another, using the same transport routes, then communication with the other

developers will take place with the aim to mitigate effects to a non-significant level. This will be delivered through the construction TMP.

11.11 MITIGATION AND RESIDUAL EFFECTS

- 11.11.1 In terms of traffic and transport, embedded mitigation is primarily delivered through a TMP. As part of the traffic and transport assessment a preliminary TMP (HGVs/LGVs) has been prepared (Appendix 11.1) and it is expected that a planning condition will be applied to the development for a final TMP to be prepared and approved by NPTCBC and BCBC post consent and prior to construction works commencing.
- 11.11.2 The Preliminary TMP (HGVs/LGVs) includes for the following measures to mitigate the potential traffic impacts associated with the proposed development:
- Proactive consultation with SWTRA, NPTCBC, BCBC and the local community affected by traffic routing to develop and agree mitigation measures as required and as outlined in Section 11.8, including:
 - Temporary signage to inform both drivers and pedestrians;
 - Temporary speed restrictions; and
 - Public notifications and liaison during the construction phase of planned vehicle movements (i.e. turbine deliveries and timings, HGV numbers, timings, particular busy periods and durations);
 - The condition, structure and capacity of the delivery routes should be assessed for the intended vehicle deliveries and numbers and any upgrade provisions (i.e. temporary formal passing places, tarmac overly strengthening, condition monitoring and remedial/repair works and responsibilities) agreed with NPTCBC / BCBC;
 - Application for a temporary reduction in speed limit on part of the B4282;
 - HGV deliveries scheduled to avoid peak times;
 - To reduce risk to pedestrians and road users, abnormal loads should be adequately escorted and appropriate traffic management and signage used;
 - It is important that the local planning authority road departments are consulted on all transport issues and to make sure that deliveries do not conflict with other scheduled road works. For the same reason SWTRA would also be consulted with reference to trunk roads; and
 - Consideration of a pre-commencement survey in a format agreeable with the local planning authorities.
- 11.11.3 The effects are fully detailed in Table 11.18 for each receptor assessed. Table 11.19 summarises the residual effects in terms of the receptor group and the highest residual effect determined to a receptor within that group.

Table 11.19: Highest effect by receptor group

Receptor Group	Highest Residual Effect
Public Road Network and Users	Moderate / Minor

Receptor Group		Highest Residual Effect
Local Settlements		Moderate / Minor
11.11.4	The effect of the turbine foundation concrete pours, should ready mix concrete be adopted rather than the intended on-site batching plant, is assessed and considered significant without any mitigation, however with impact mitigation applied the effects are considered to be not significant.	
11.11.5	The residual effects of abnormal load deliveries on driver delay are assessed and considered to be not significant.	