


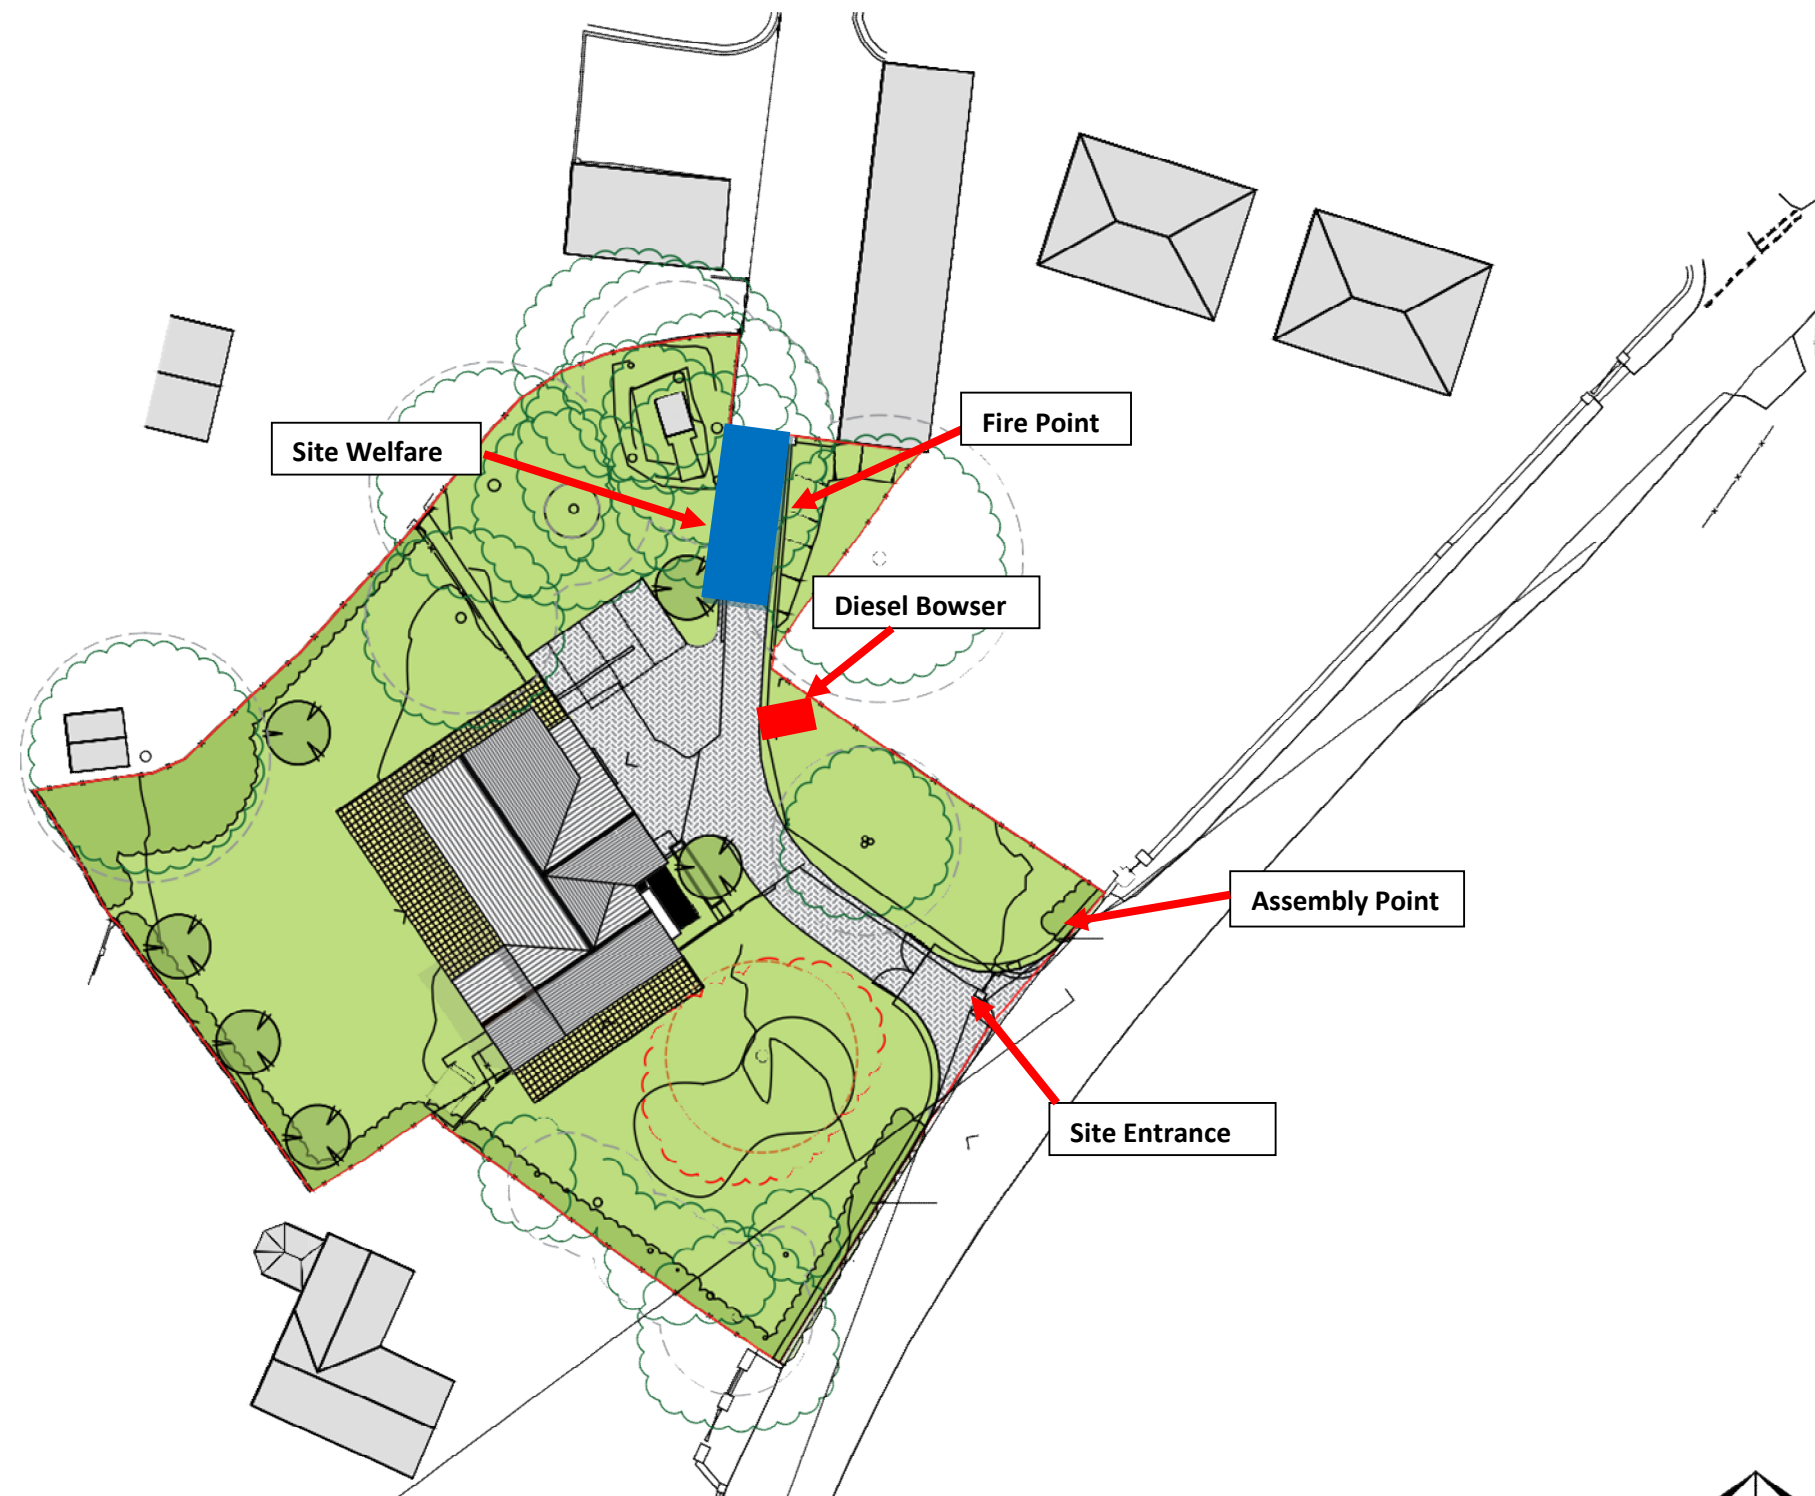

Site Traffic

All site traffic will stick to a 5mph speed limit and be mind full of their surroundings. Dumpers/rollers/excavators will be banked at all times when moving and working on site and only operated by trained persons.

Delivery Vehicles

All Deliveries will wait at the main gate and report to the site manager before entering site. The delivery vehicle will then be banked by two competent site persons and will reverse on to site and off load in the storage area/ lay down area. On completion the delivery vehicle will leave site through the main gate while being banked.

Site access and personnel movement

Pedestrian site access will be via the side gate only. Site personnel will use the marked walk ways only and be mindful of moving plant at all times especially at crossing points.