




Scale 1:100

General Arrangement
Notes:

1. All litter within the site boundary shall be removed, including stones, bricks, debris, paper, cans etc. not necessarily arising from the execution of the works
2. The contractor shall programme the timing of the removal of all items to coincide with his method of working
3. The whole area within the site boundary shall be left in a clean and tidy condition to the satisfaction of the Resident Engineer
4. Existing covers to statutory undertakers apparatus to be raised or lowered to suit new footway levels
5. Unless stated otherwise in the Contract, all kerbs, channels, edgings and quadrants shall comply with BS EN 1340:2003
6. Kerbs, channels, edgings and quadrants shall be laid in accordance with BS7533-6-1999
7. Crossfall of new footway is to be 1:30 to match existing or as agreed on site, to fall towards carriageway
8. Any identification of drainage issues are to be brought to the attention of the Project Manager immediately
9. All flexible surfacing, including footway to be machine laid
10. All vertical surfacing joints to be saw cut and receive cold applied pitch prior to surfacing operations taking place
11. Tie in new footway/pavement construction to existing construction where applicable
12. All horizontal surfaces to be tack coated prior to overlaying at a rate of spread of 0.3 to 0.5 litres/sq.m. with type A1-40/K1-40 bitumen emulsion
13. The Contractor is to observe and adhere to any special requirements, including those stated in the Contract Documents, when working in the vicinity of Statutory Undertakers apparatus
14. The Contractor is to ensure all relevant Statutory Undertakers apparatus is traced and marked on site before any excavation works commence
15. All backfill shall be imported acceptable class 1 material (unless otherwise stated on the contract drawings) to the underside of road construction or temporary reinstatement
16. Temporary surface reinstatement in trenching shall match the surrounding surface or comply with the HAUC document - 'Specification for the Reinstatement of Openings in Highways'. This temporary reinstatement is included in the item coverage
17. The works shall be securely fenced to prevent members of pub and non construction related staff from being to enter the site
18. All Dimensions are given in mm unless otherwise stated
19. ALL WORKS MUST BE CONSTRUCTED IN ACCORDANCE WITH THE NEATH PORT TALBOT COUNTY BOROUGH COUNCIL: SPECIFICATION FOR THE CONSTRUCTION OF ROADS FOR ADOPTION
20. ALL WORKS MUST BE CONSTRUCTED IN ACCORDANCE WITH THE NEATH PORT TALBOT HIGHWAY TECHNICAL GUIDE FOR RESIDENTIAL, COMMERCIAL & INDUSTRIAL DEVELOPMENTS".

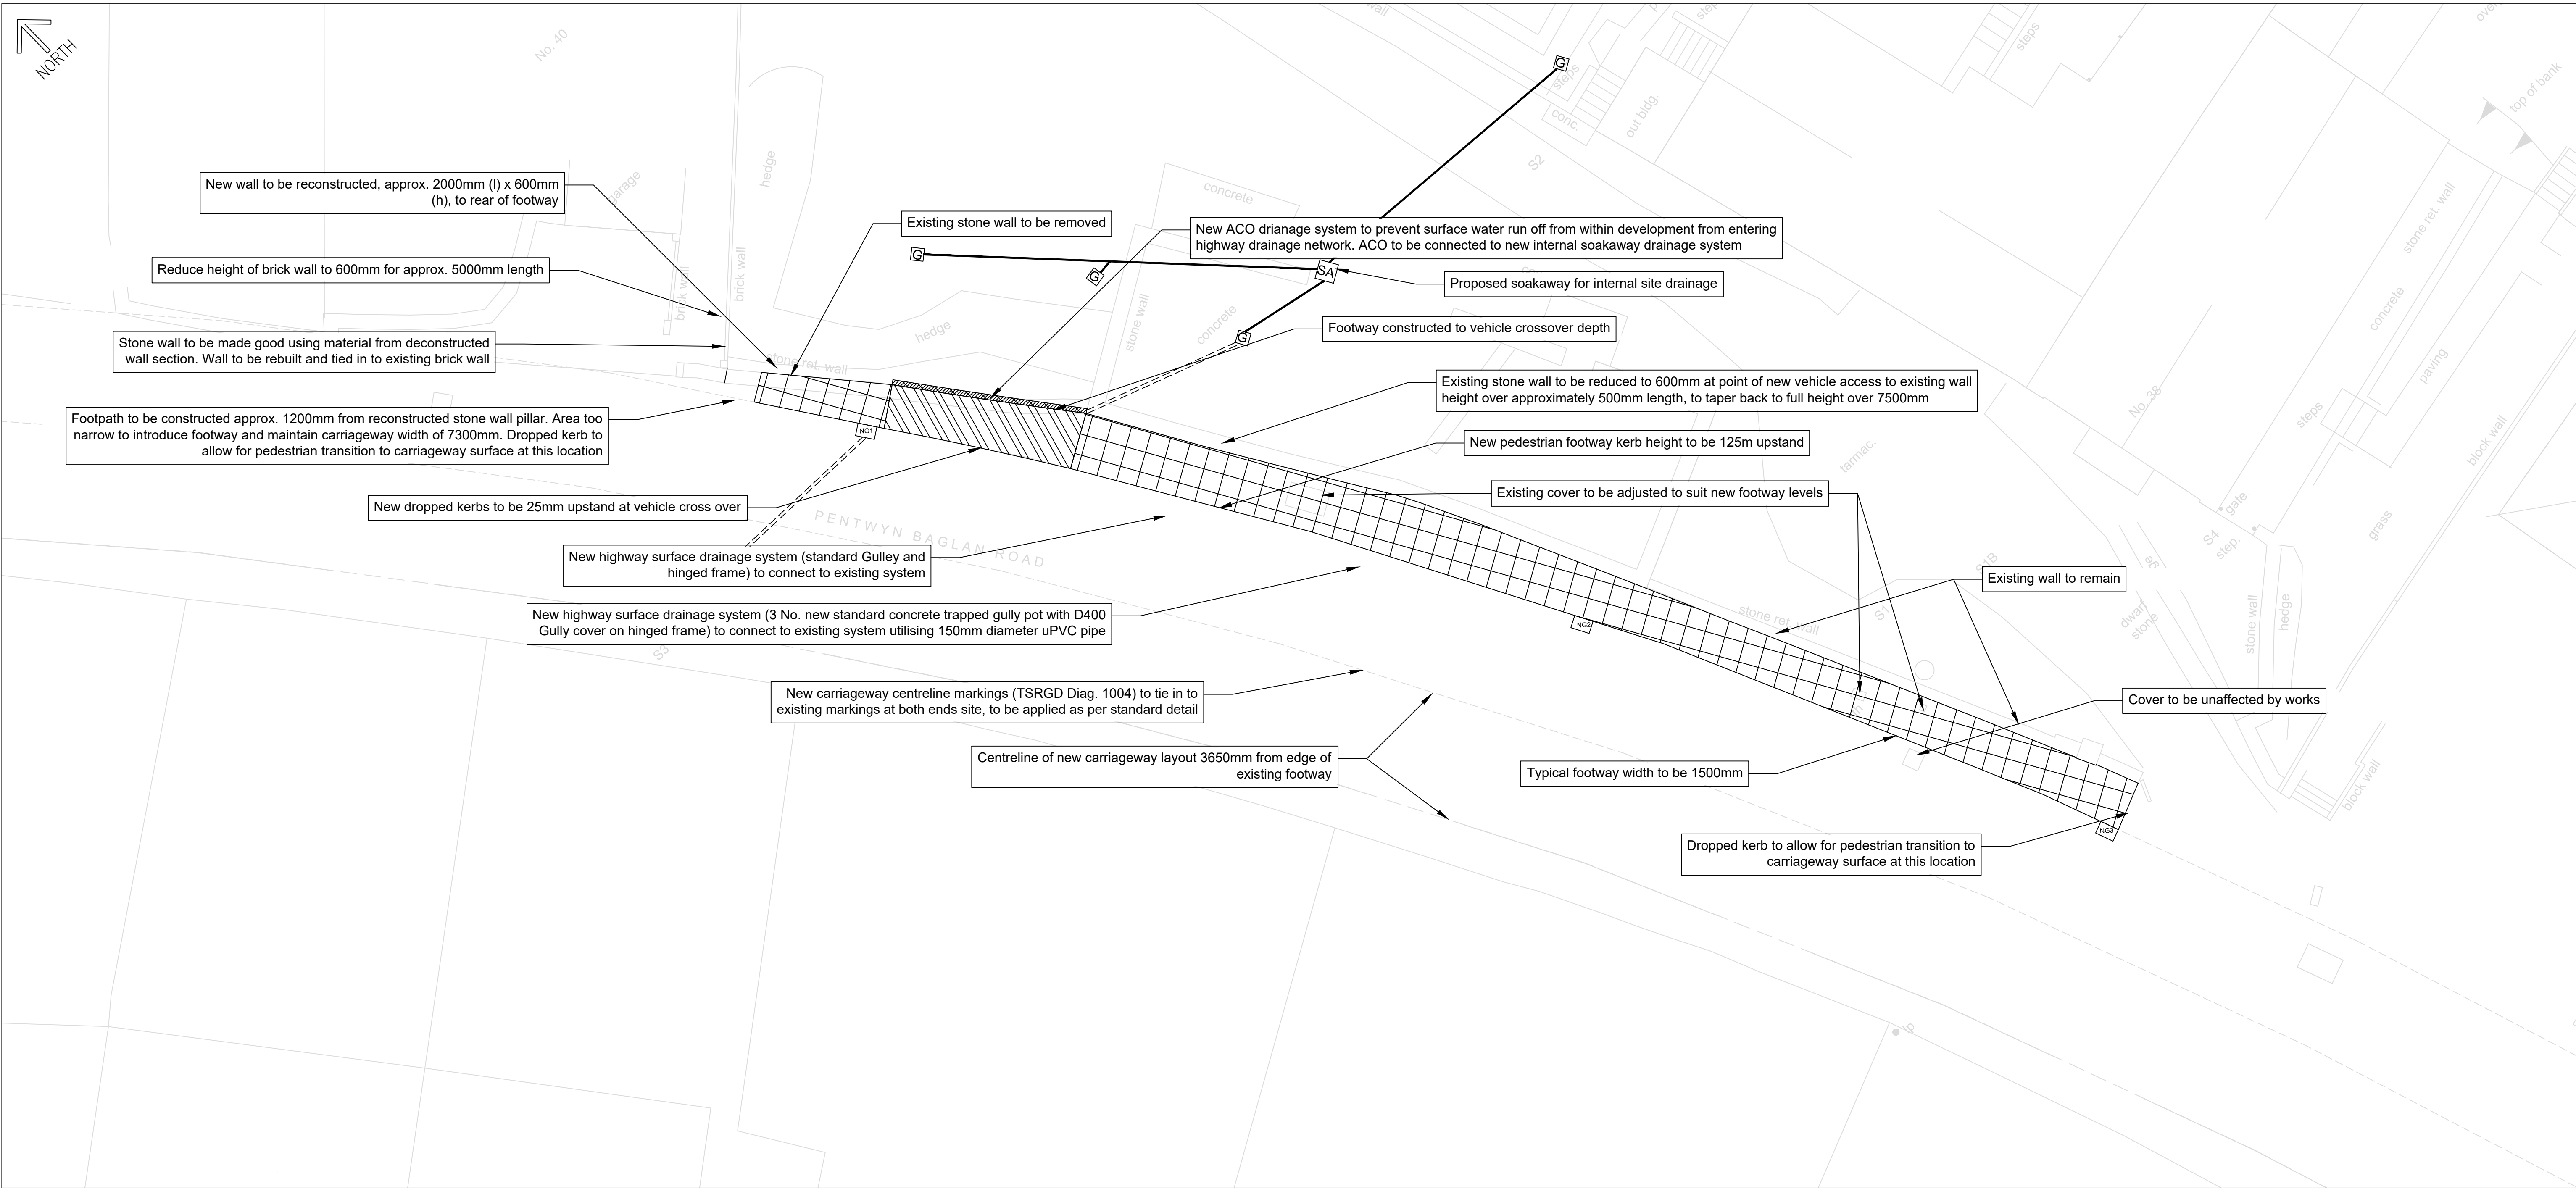

project 38 Pentwyn Baglan Road Baglan, SA12 8EB			
title General Arrangement for Highway Works			
scale 1:100	drawn DC	date 04/2024	
original drawing A1	checked YES	date 04/2024	
job no. 190424/E01	drawing no. D001	approved YES	revision date 04/2024