


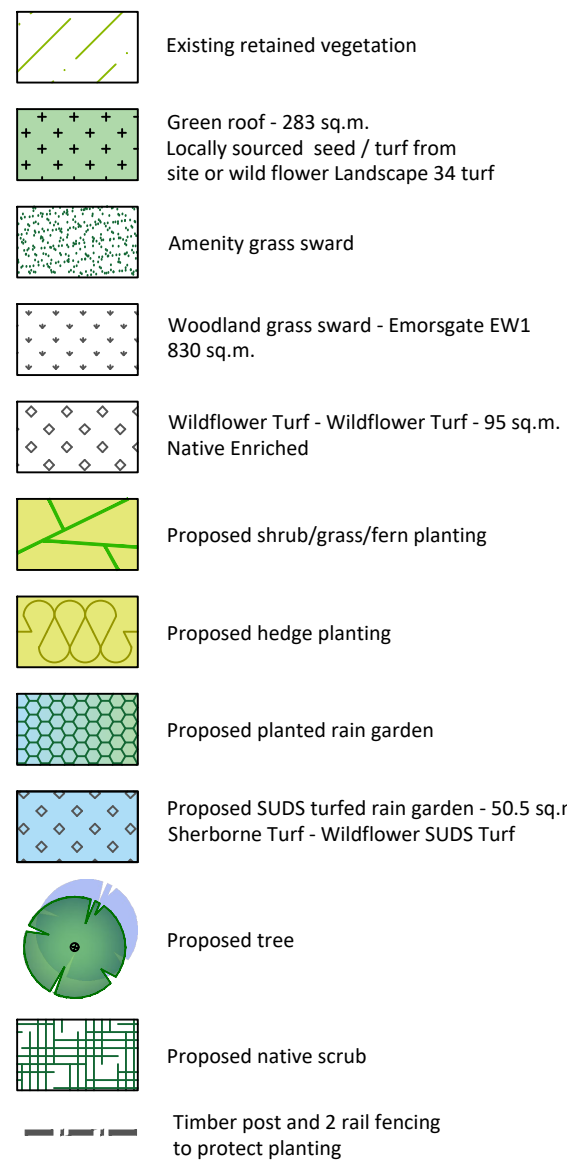

Planting schedule

Accent plants

1 Cornus controversa 'Variegata'	1.8-2.1m	75Lt	As shown
----------------------------------	----------	------	----------

Cascading plants

15 Convolvulus cneorum	30-40cm	5Lt	4 per sq.m.
4 Hedera helix Gold Trailing Ivy	90-1.2m	7.5Lt	3 per sq.m.
9 Lysimachia nummularia	30-40cm	5Lt	4 per sq.m.
14 Rosmarinus officinalis prostratus	40-60cm	7.5Lt	3 per sq.m.
0 Thymus serpyllum 'Pink Chintz'	30-40cm	5Lt	6 per sq.m.

Climbers

2 Hedera Sulphur Heart	1.5-1.8m	10Lt	As shown
2 Jasminum officinale	1.5-1.8m	10Lt	As shown
5 Clematis montana 'Elizabeth'	1-1.5m	10Lt	As shown
2 Lonicera periclymenum	1-1.5m	10Lt	As shown

Shrubs/grasses/Ferns/Bulbs

100 Allium ursinum	40-60cm	2Lt	5 per sq.m.
58 Asplenium scolopendrium	30-40cm	5Lt	5 per sq.m.
0 Calluna vulgaris	40-60cm	5Lt	5 per sq.m.
0 Euonymus fortunei Emerald n Gold	60-90cm	5Lt	4 per sq.m.
0 Euonymus japonicus 'Silver King'	30-40cm	7Lt	3 per sq.m.
0 Lithodora Heavenly Blue	NA	5Lt	5 per sq.m.
80 Matteuccia struthiopteris	60-90cm	5Lt	5 per sq.m.
65 Miscanthus sinensis 'Ferner Osten'	30-40cm	5Lt	5 per sq.m.
0 Polytaichum polyblepharum	40-60cm	5Lt	6 per sq.m.
0 Sarcococca hookeriana var. humilis	40-60cm	5Lt	3 per sq.m.

Hedges

24 Viburnum tinus	90-1.2m	15Lt	3 per lin m
-------------------	---------	------	-------------

Native hedge (Total Length: 33m)

7 per lin m double rows in groups of 3 to 7
All plants to be fitted with a 600mm high Green-Tech Bio-Earth Biodegradable Tree shelter guard and 50mm square softwood stake and tie.

54 Corylus avellana	90-1.2m	Bare root	7 per lin m	30%
27 Cornus sanguinea	90-1.2m	Bare root	7 per lin m	15%
45 Crataegus monogyna	90-1.2m	Bare root	7 per lin m	25%
27 Euonymus europaeus	90-1.2m	Bare root	7 per lin m	15%
27 Viburnum opulus	90-1.2m	Bare root	7 per lin m	15%

Rain Garden Planting (132.5 sq.m.)

33 Angelica sylvestris	2Lt	5 per sq.m.	5%
33 Athyrium filix femina	2Lt	5 per sq.m.	5%
33 Catha palustris	2Lt	5 per sq.m.	5%
33 Carex acuta	2Lt	5 per sq.m.	5%
116 Dryopteris felix mas	2Lt	5 per sq.m.	20%
33 Filipendula ulmaria	2Lt	5 per sq.m.	5%
33 Geum rivale	2Lt	5 per sq.m.	5%
66 Juncus effusus	2Lt	5 per sq.m.	10%
66 Lythrum salicaria	2Lt	5 per sq.m.	10%
66 Mentha pulegium	2Lt	5 per sq.m.	10%
66 Osmunda regalis	2Lt	5 per sq.m.	10%
66 Persicaria bistorta	2Lt	5 per sq.m.	10%

Native Scrub (Area: 101m²)



All plants to be fitted with a 600mm high Green-Tech Bio-Earth Biodegradable Tree shelter guard and 50mm square softwood stake and tie.

30 Corylus avellana	90-1.2m	Bare root	1 per sq.m.	30%
15 Cornus sanguinea	90-1.2m	Bare root	1 per sq.m.	15%
25 Crataegus monogyna	90-1.2m	Bare root	1 per sq.m.	25%
15 Euonymus europaeus	90-1.2m	Bare root	1 per sq.m.	15%
15 Viburnum opulus	90-1.2m	Bare root	1 per sq.m.	15%

Trees

Planted in accordance with tree pit detail.

1 Acer campestre	350-425cm	Extra Heavy Standard
2 Quercus robur	350-425cm	Extra Heavy Standard
1 Sorbus aucuparia	350-425cm	Extra Heavy Standard

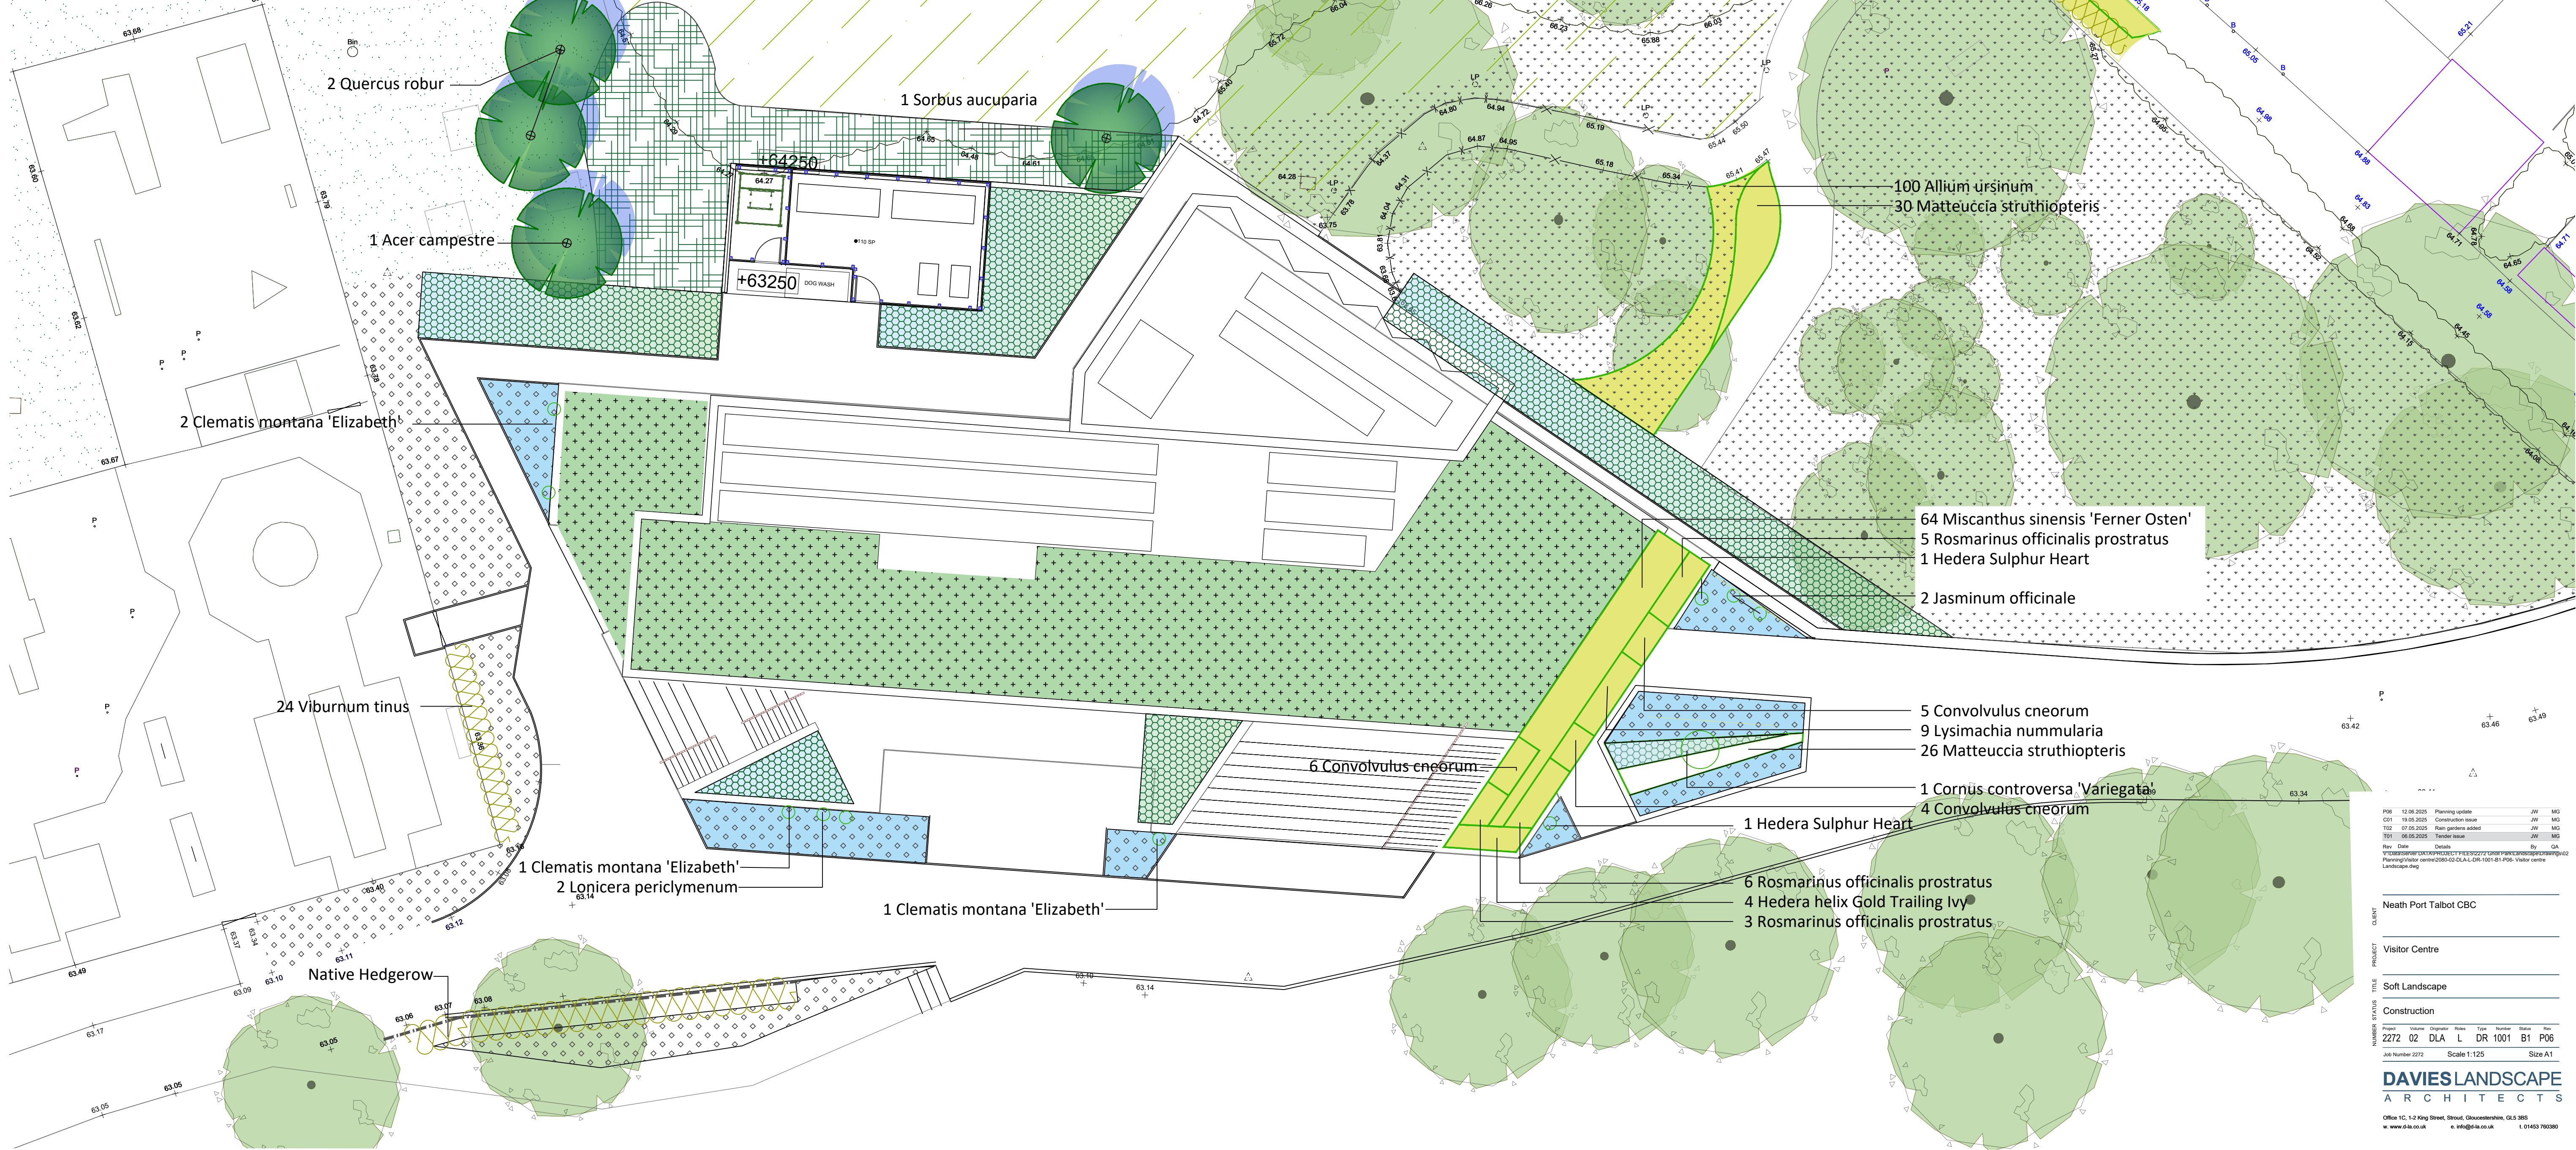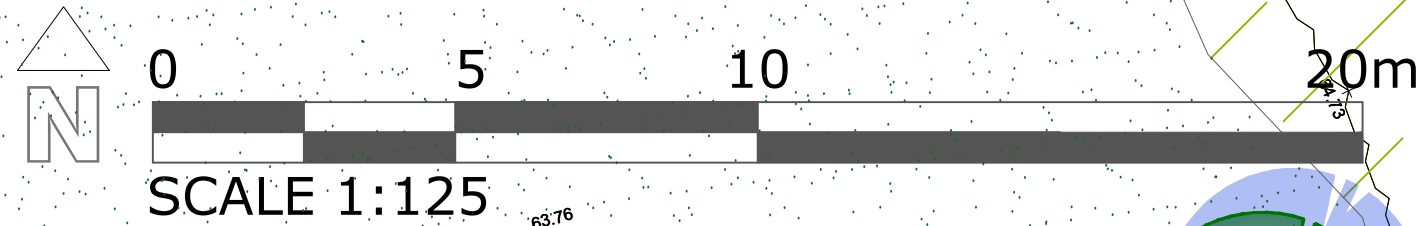

Rev	Date	Details	By	QA
P01	12.06.2025	Planning update	JW	MS
C01	16.03.2025	Construction issue	JW	MS
T02	07.05.2025	Rain garden added	JW	MS
T03	08.09.2025	Tender issue	JW	MS

Neath Port Talbot CBC

Visitor Centre

Soft Landscape

Construction

Project	Volume	Originator	Revised	Type	Number	Status	Rev
2272	02	DLA	L	DR	1001	B1	P06

Job Number 2272 Scale 1:125 Size A1

DAVIES LANDSCAPE ARCHITECTS

Office 1C, 1-2 King Street, Stroud, Gloucestershire, GL5 3BS

www.dla.co.uk e: info@da.co.uk t: 01453 703090