
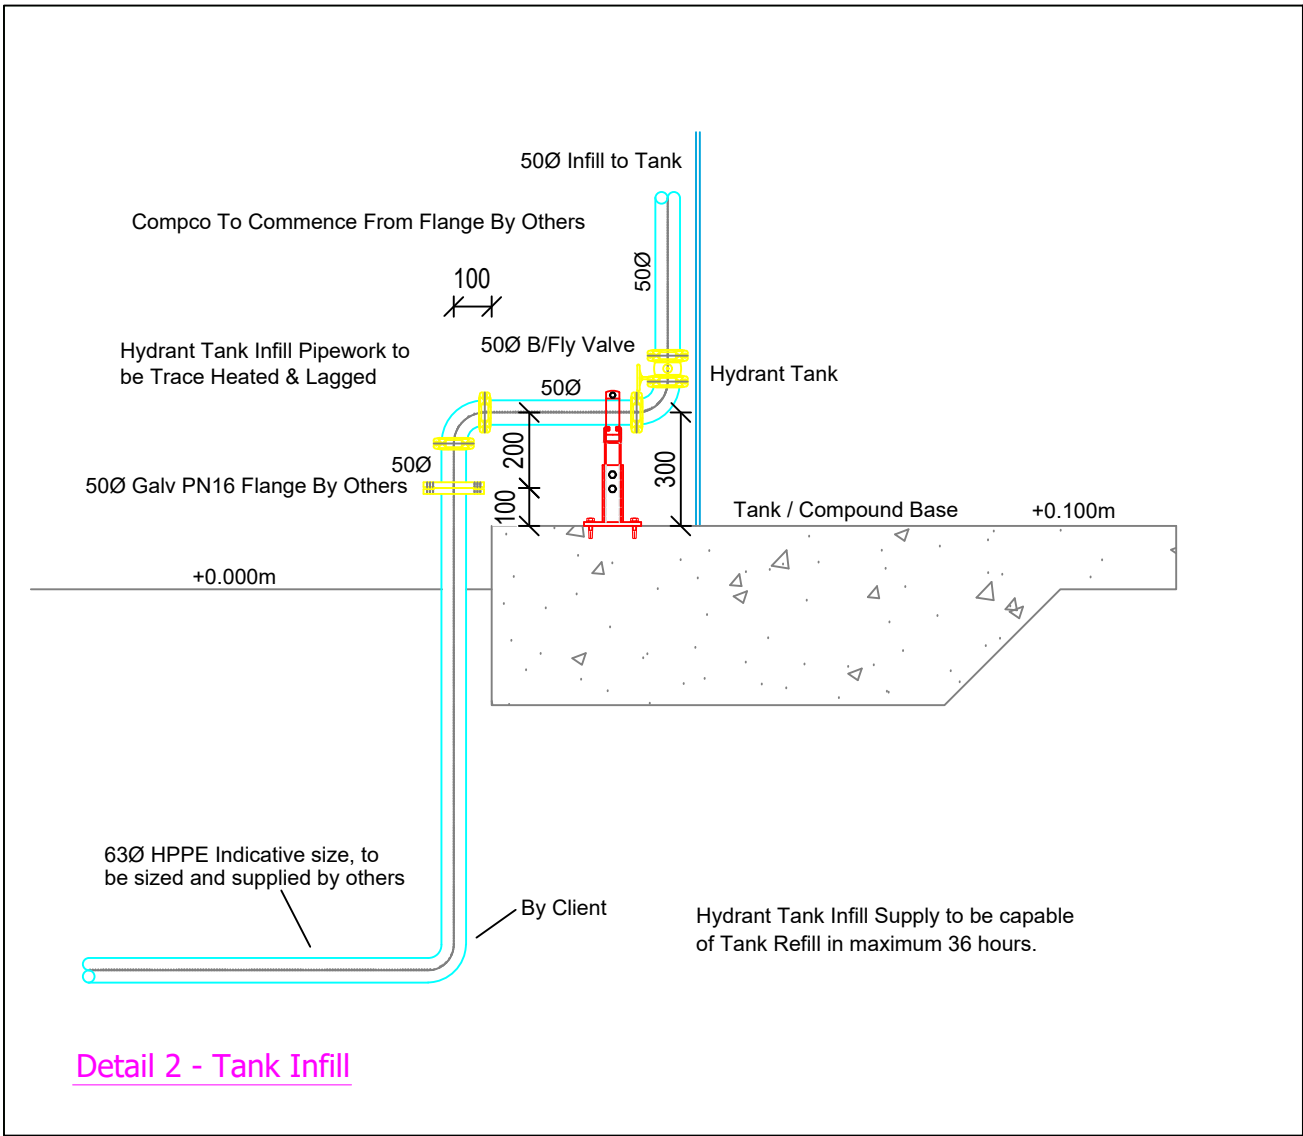
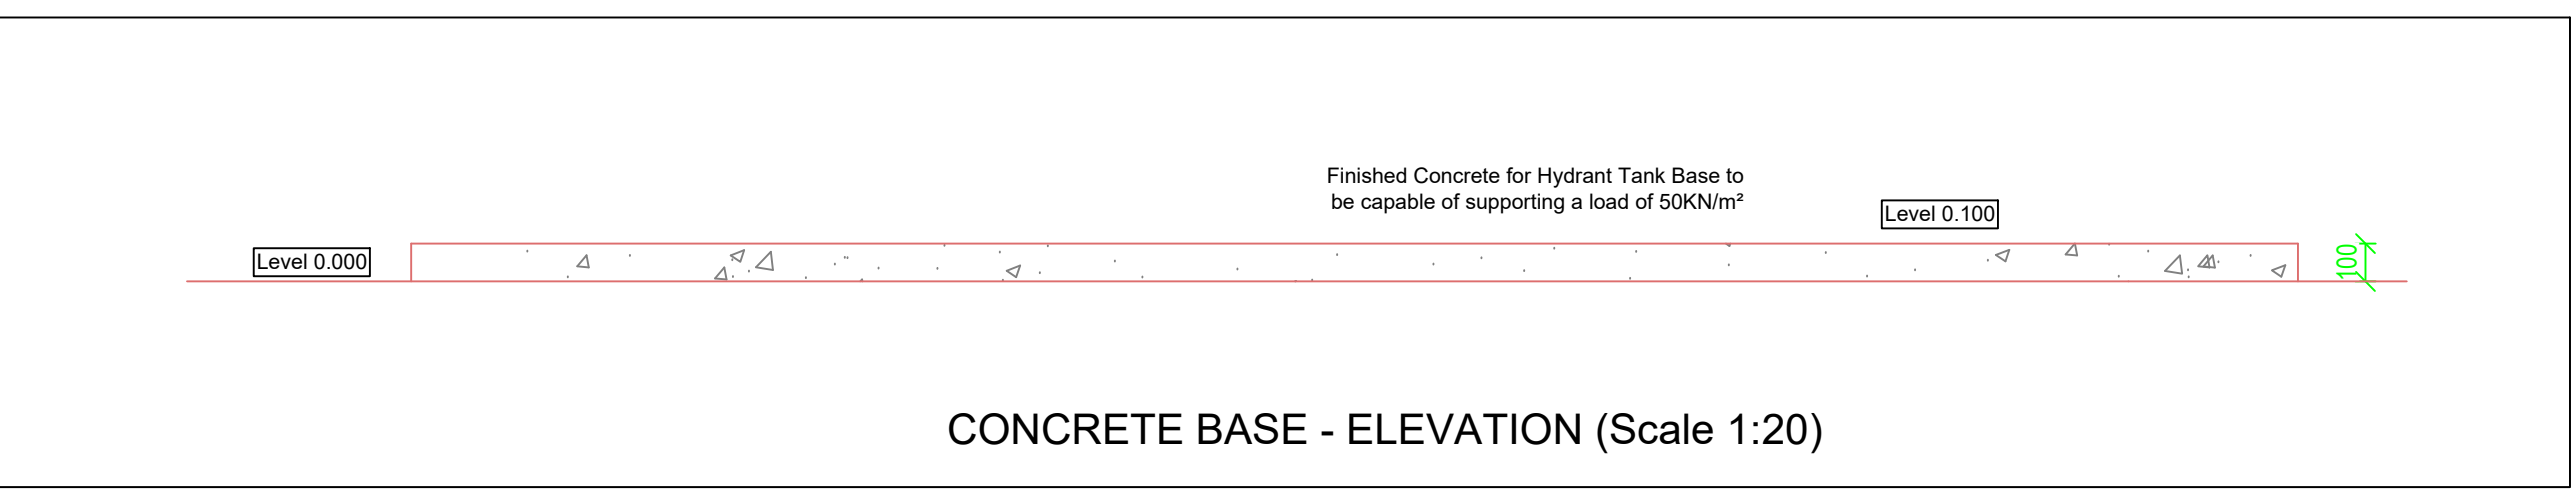
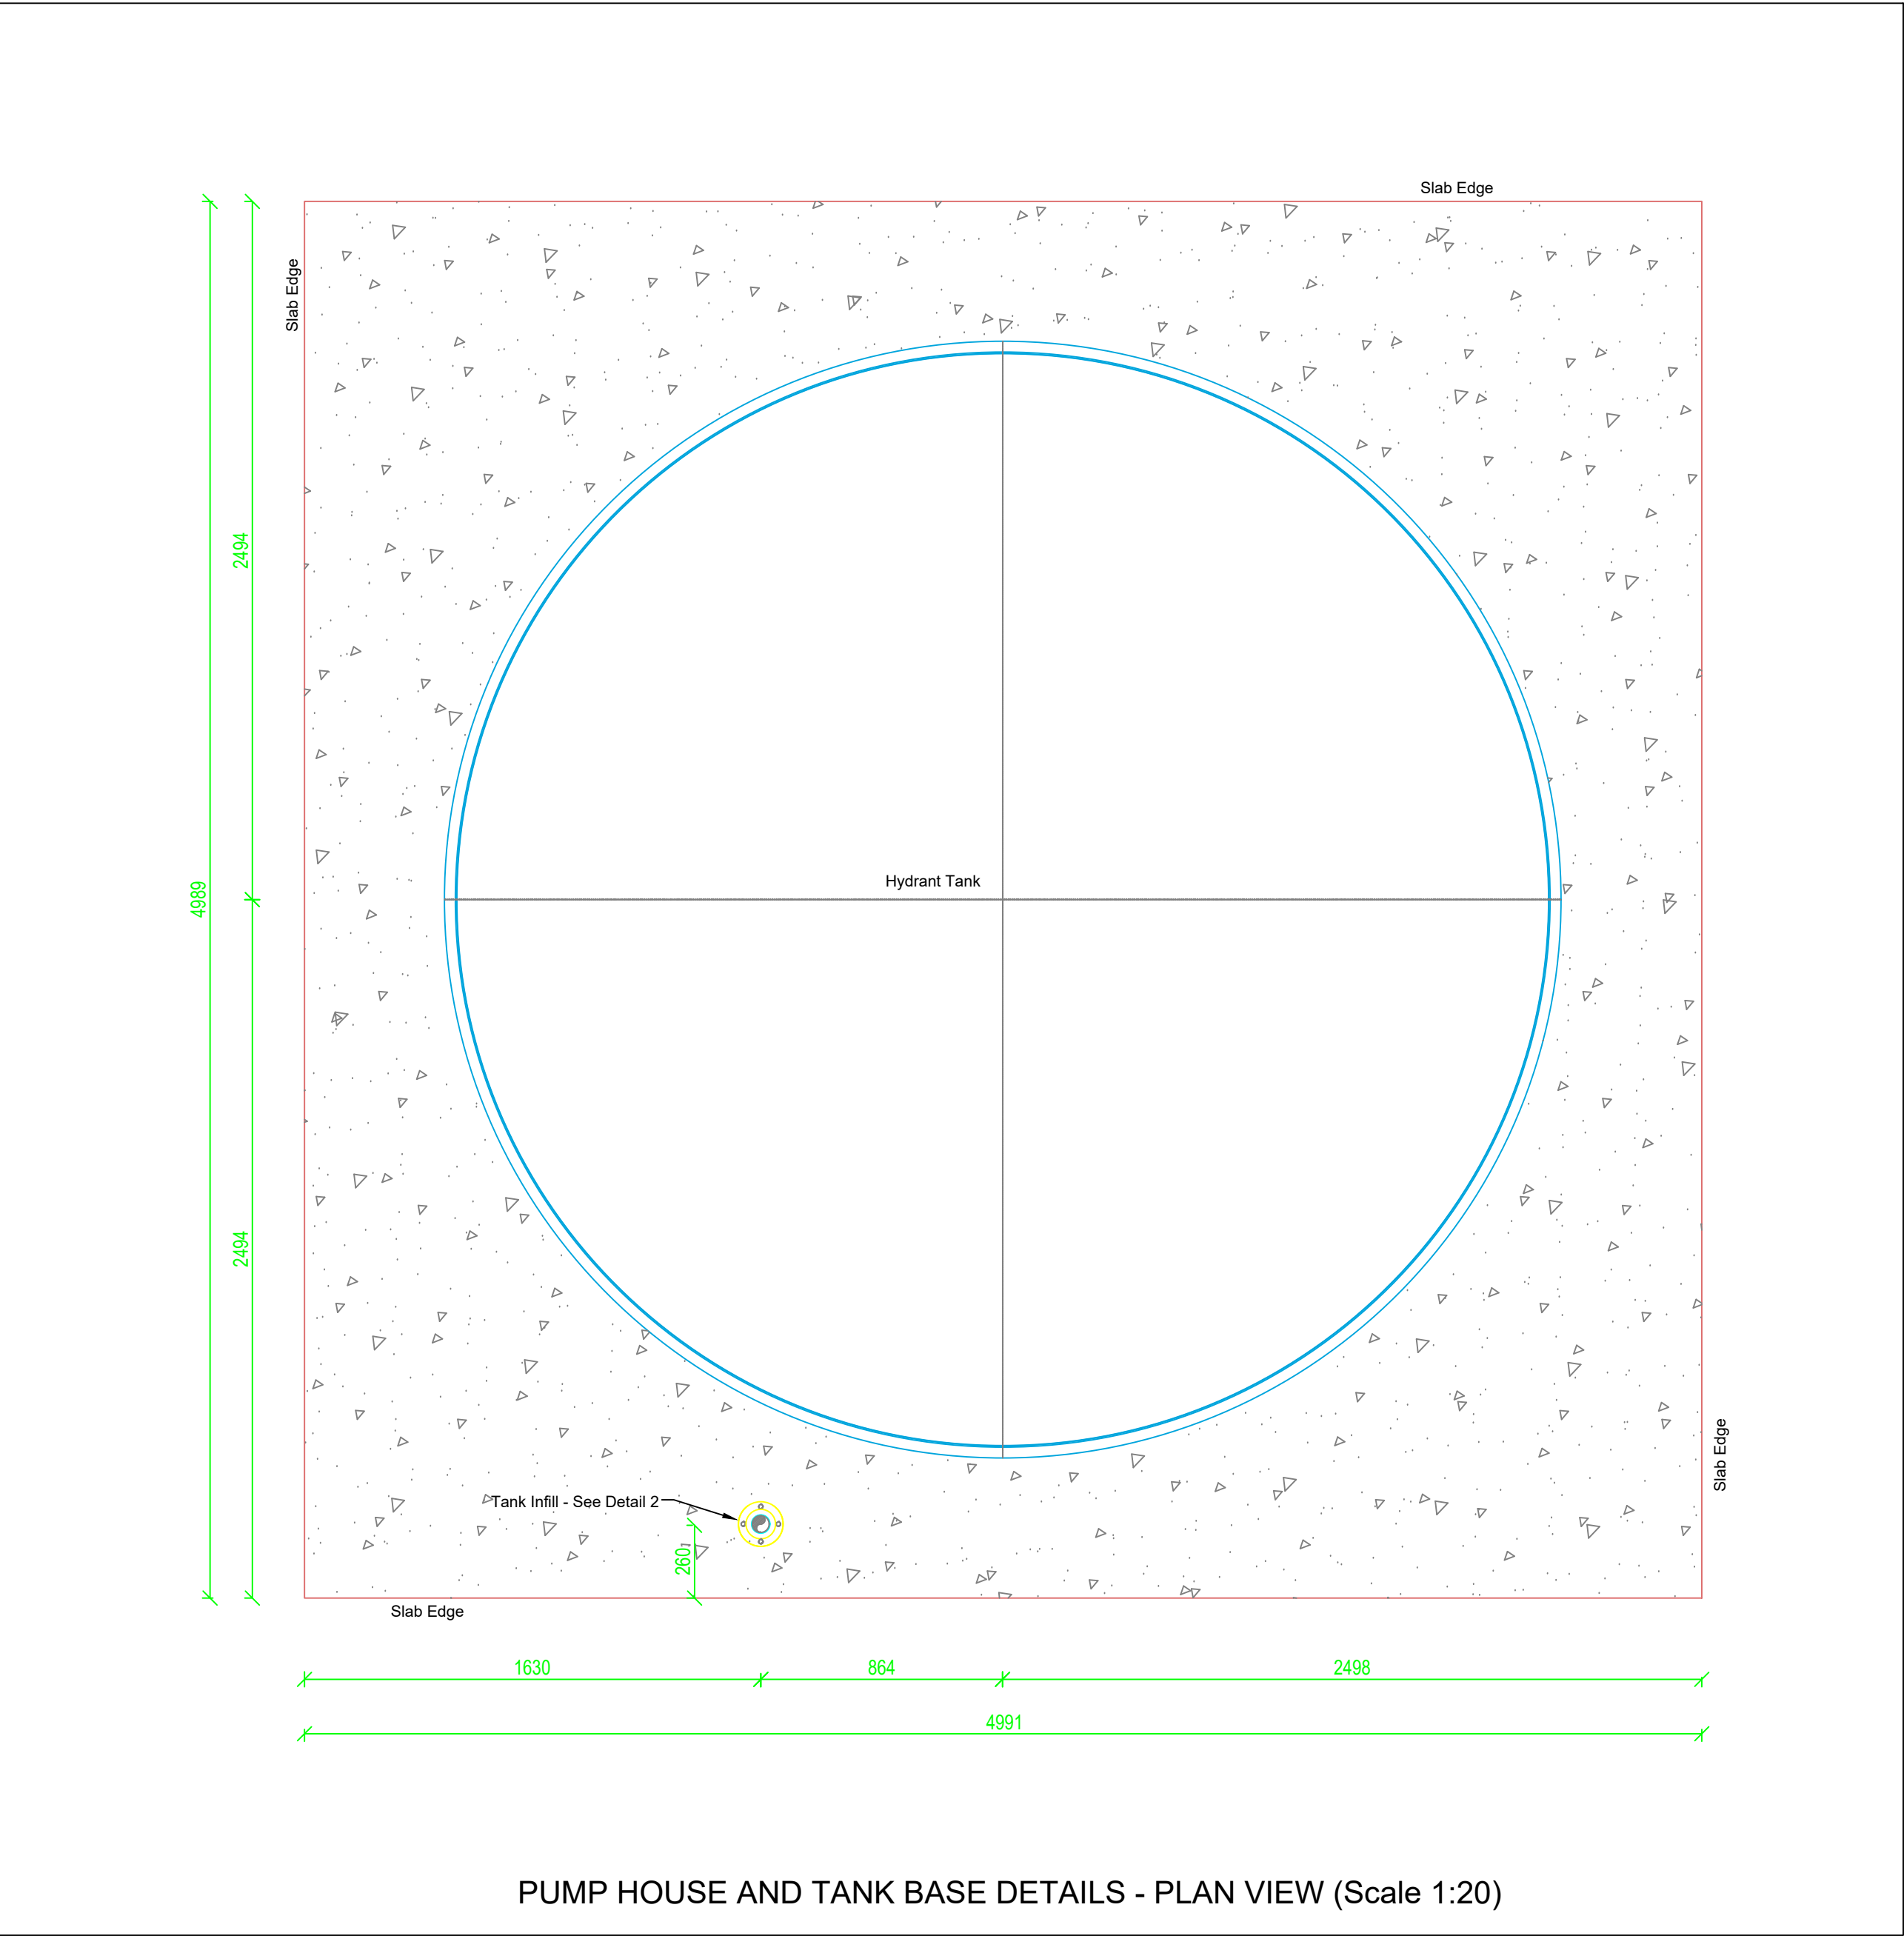
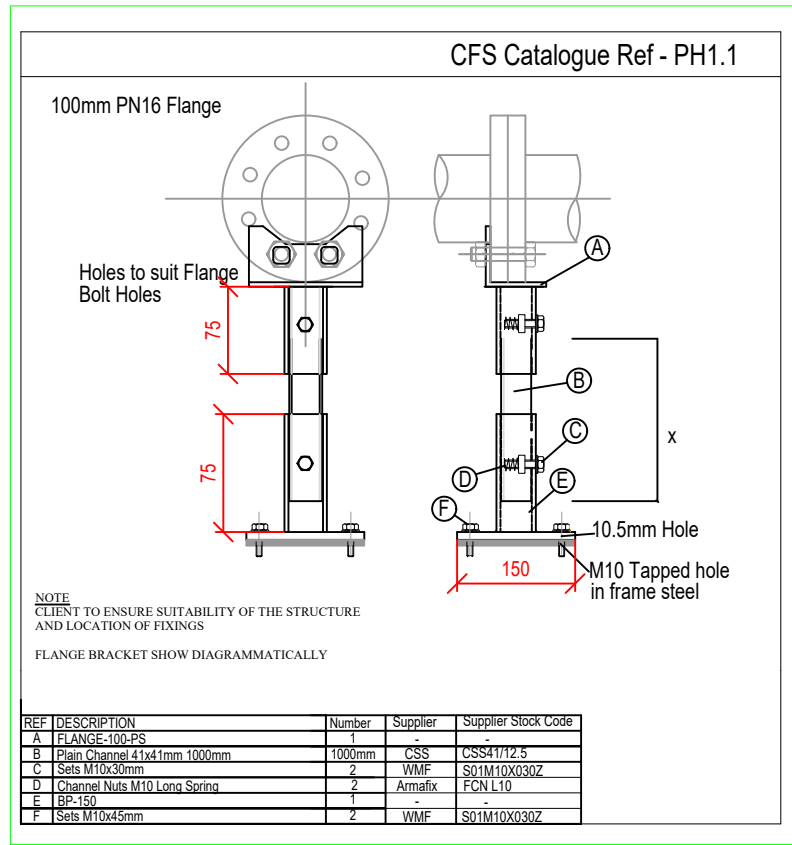
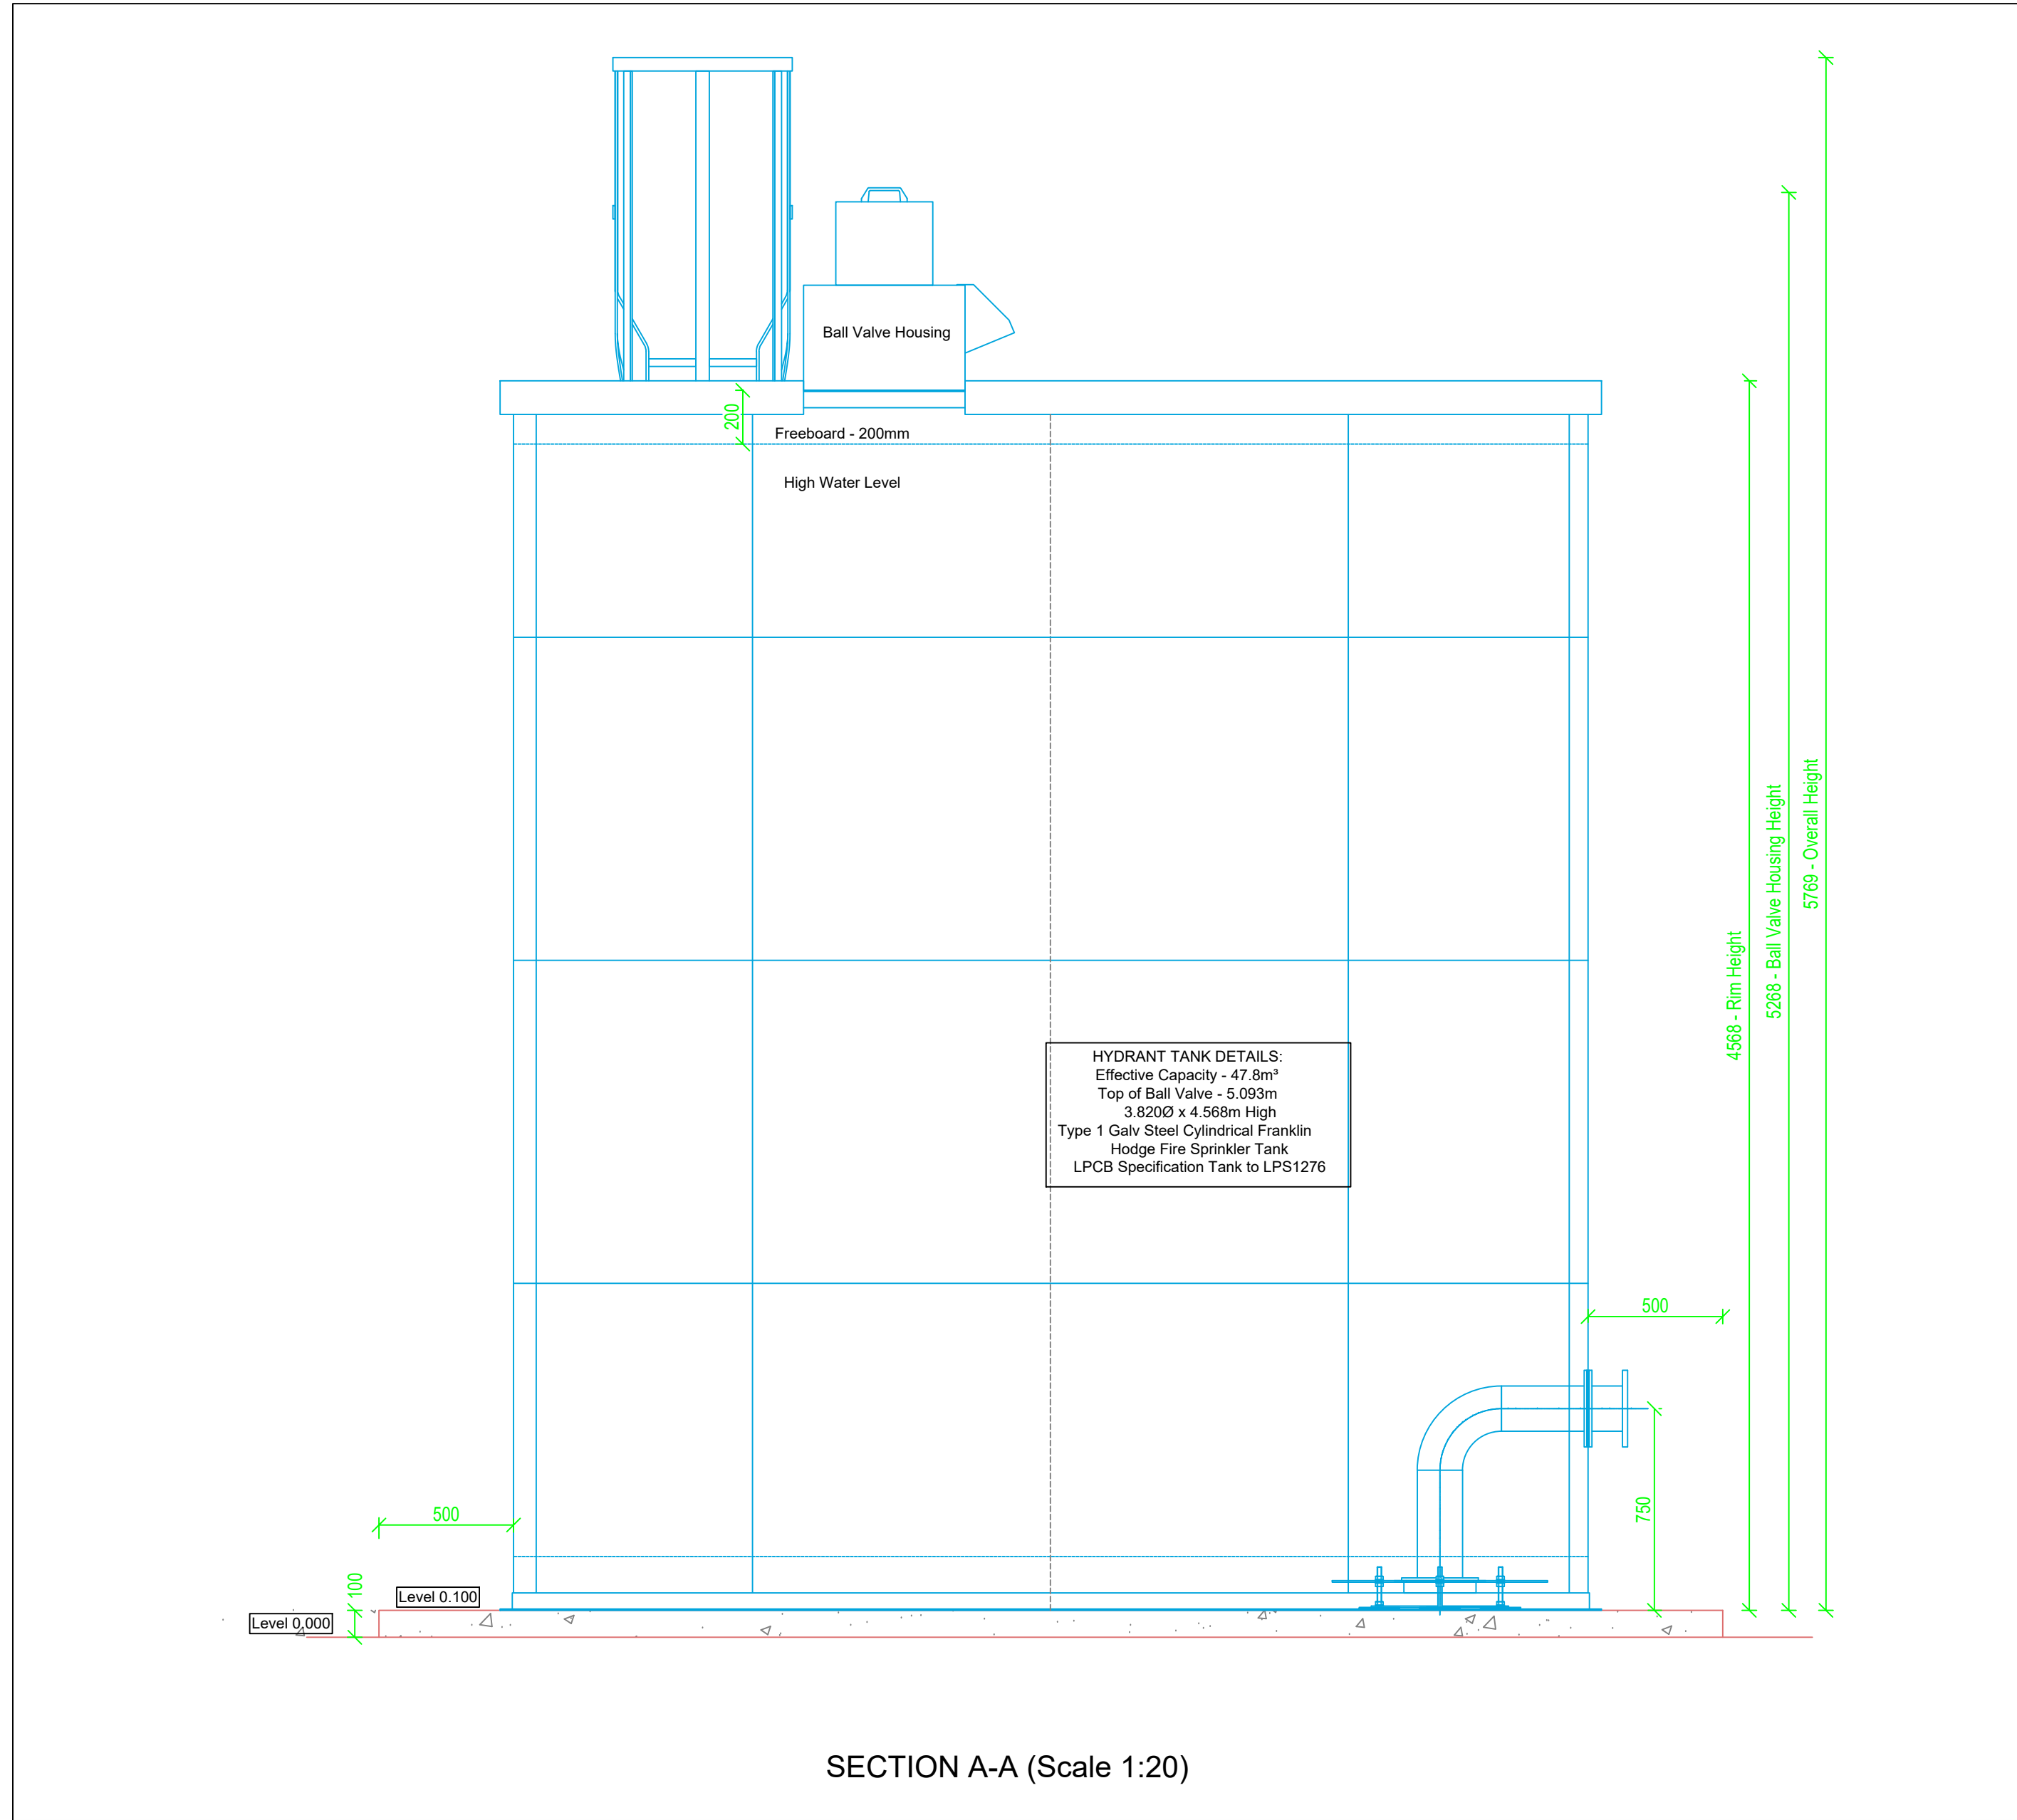


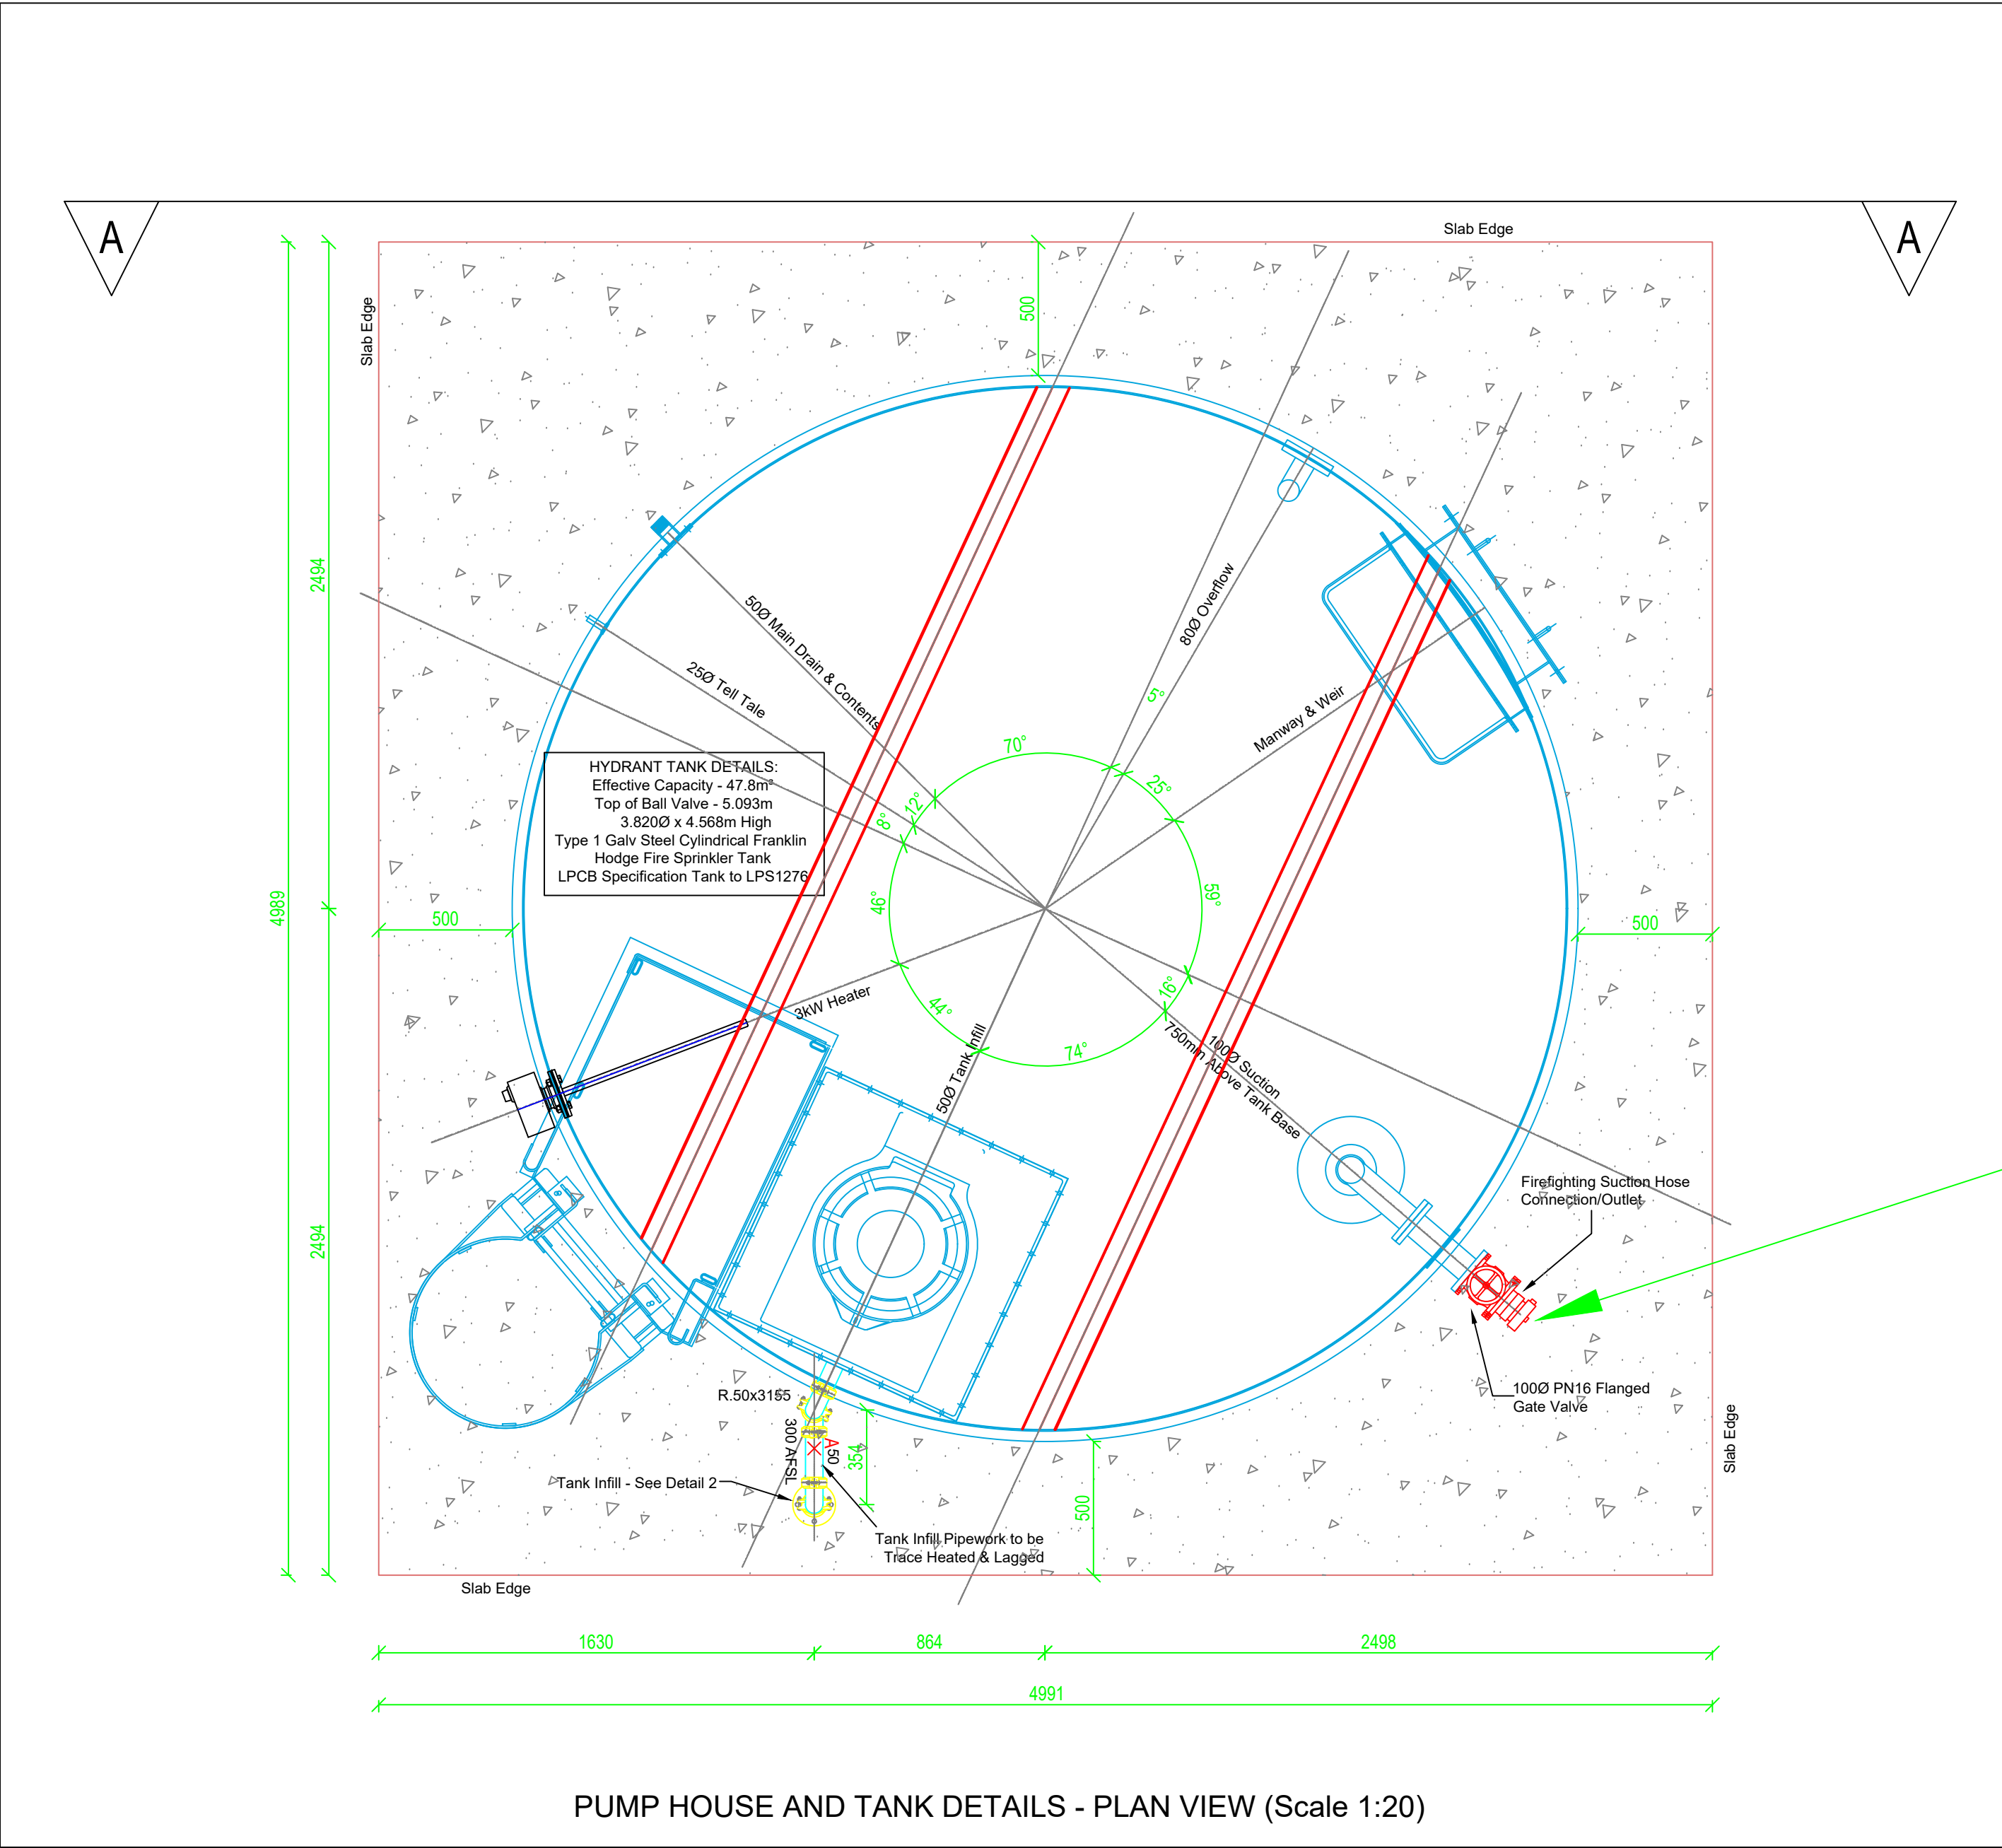

(Notes To The Main Contractor)

To enable the installation of the hydrant tank to be installed correctly, the following items must be adhered to:

Finished base levels to tank base to be as Compo details any changes to this must be relayed to Compo prior to casting for comment and approval.

Adequate drainage will be required for the pump house for system drainage, minimum flow level, pump cooling tank, hot drains and flow lines etc. Once pipes are installed to the drain pit this area should be brick bounded and sealed accordingly.


Compo Fire Systems Ltd do not allow for any associated builders work in their bid.

Sprinkler tank base is to be built as per our suppliers recommended data sheet with no sharp edges to a +/- 30mm tolerance tolerance to the water perimeter and a +/- 20mm internal tolerance tolerance as per the typical detail below. A full manufacturers detail sheet is available upon request.

Finished concrete base to be capable of supporting a load of 50kN/m²

Sprinkler Base Level Tolerances & Typical Detail

Builders Work
Compo Fire Systems exclude any builders work associated with the installation of pipework/fittings/valves on this drawing. For a full list of works required refer to the projects engineer. Where sprinkler pipework and/or heads are fitted into solid ceilings we recommend a 600mm square access hatch is provided adjacent each head for access at a later date. If not provided by client, they will do not accept any responsibility or costs for access holes being required at a later date for any reason.
Electrical supplies/ventilation
Please refer to our tender documents for the exact scope allowed by Compo. Any item excluding or omitted from our tender is not included in our scope and is assumed to be provided by others. Please refer to the tender documents for the exact scope allowed by Compo. Any item excluding or omitted from our tender is not included in our scope and is assumed to be provided by others. Please refer to the tender documents for the exact scope allowed by Compo. Any item excluding or omitted from our tender is not included in our scope and is assumed to be provided by others.

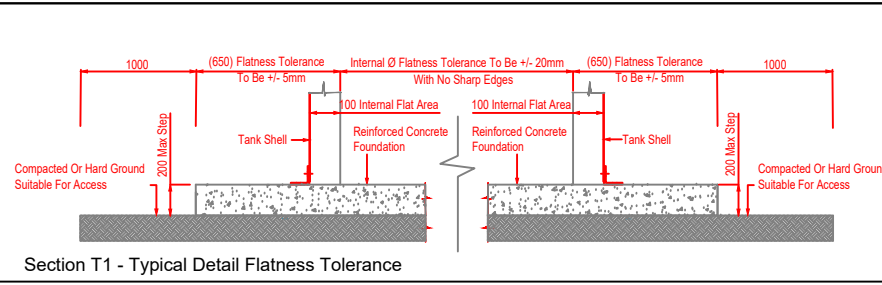

Copyright in this drawing is the property of Compo Fire Systems. It must not be reproduced or amended without the express consent, in writing, of Compo Fire Systems.



GENERAL NOTES

Builders Work
Compo Fire Systems exclude any builders work associated with the installation of pipework/fittings/valves on this drawing. For a full list of works required refer to the projects engineer. Where sprinkler pipework and/or heads are fitted into solid ceilings we recommend a 600mm square access hatch is provided adjacent each head for access at a later date. If not provided by client, they will do not accept any responsibility or costs for access holes being required at a later date for any reason.

Rev	Description	Drawn	Check	Date
P01	Approval issue	JZ	-	19/06/2025

FOR INFORMATION
Not for fabrication

COMPO Fire Systems
Cleve House, Malvern Road, Lower Wick, Worcester, WR2 4YX
Tel: 01905 741600
Fax: 01905 741620
E-mail: design@compcofire.co.uk

CLIENT: MORGAN SINDALL
UNIT 5 CAE GWYRDD, TONGWYNLAIS, CARDIFF, CF15 7AB

TITLE: HYDRANT TANK BUILDERS WORK LAYOUT & DETAILS

SITE: LLANGATWG COMMUNITY HIGH SCHOOL

DATE: 19/06/2025	SCALE: As Noted@A0	SUITABILITY CODE: S2
DRAWN: JZ	CHECKED: SD	MODEL: N/A
Draw Number: 26CC07-CFS-XX-XX-D-OH-0007	Revision: P01	