Superseded

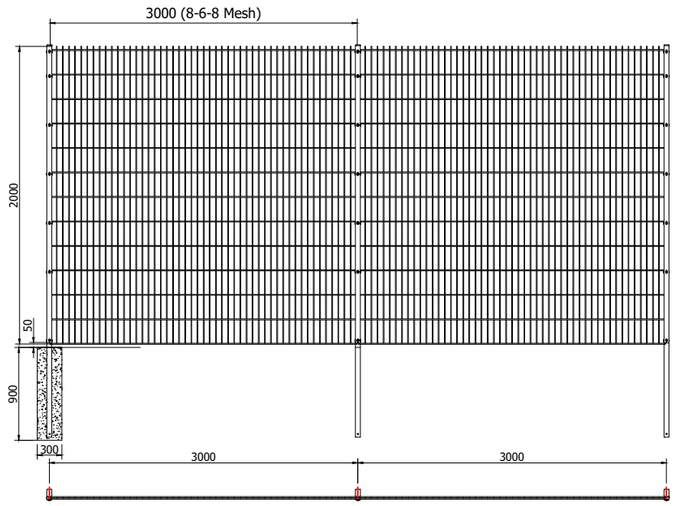

2.0M 8.6.8 Boundary Fence line

Existing fence line to be removed and replaced with new (Total perimeter: 78 metres)
Take down and dispose to licensed recycling tip 1200mm original iron fence. Approx length provided

Supply and erect proposed fence line A to be nominal height 2000mm high mesh and wire panels, to be 2500mm wide comprising of 6mm Single vertical and 8mm double horizontal wires. Mesh size to be 200mm x 50mm, top edge projection 30mm, bottom of panel maximum 50mm above ground. Finish to be galvanised and powder-coated to minimum 60 microns colour green RAL 6005.

Posts to be 80mm x 40mm RHS, galvanised after manufacture and polyester powder-coated to match fencing, installed at 2518mm centres. Panels to be secured with 40mm x 5mm full length clamp bar and M8 x 40mm stainless steel Sheardrive bolts.

Foundations to be posts set in holes minimum of 300mm x 300mm x 900mm deep infilled with C10 concrete mix

Site plan 1:1250

Existing fence

NOTES

1. All dimensions in millimetres unless otherwise stated.

Rev	Details	Dr	Ch	Apr	Date

Neath Port Talbot
Castell-nedd Port Talbot
County Borough Council Cyngor Bwrdeistref Sirol
Making a difference Gwahaniaeth er gwell

PROPERTY & REGENERATION
Nicola Pearce BSc(Hons) DipTP MRTPI
DIRECTOR OF ENVIRONMENT AND REGENERATION
THE QUAYS, BRUNEL WAY
BAGLAN ENERGY PARK SA11 2GG
www.npt.gov.uk

Project
Catwg Primary School
Demountable Refurbishment 2024

Drawing Title
Roof Plan
And fence detail

File No.		Property Ref. No.			
Drawn	D. Blethyn	Checked		Approved	
Date	Jan 26	Date		Date	
Scales	As shown				
Drawing No.	A1353-01			Rev.	

Rev.
Drg. No.
Project

THIS IS A C.A.D. PRODUCED DRAWING AND SHOULD NOT BE AMENDED BY HAND.