


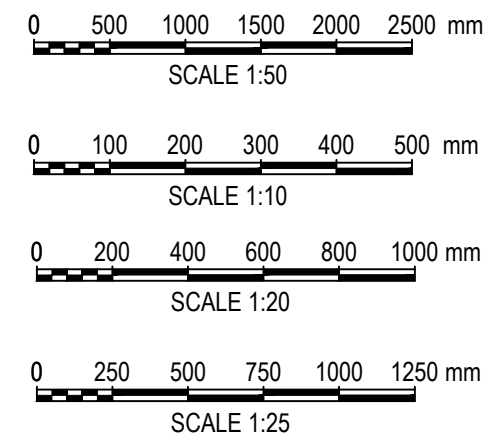


- All dimensions are in millimetres unless noted otherwise.
- All levels are shown in metres unless noted otherwise.
- Do not scale from the drawing. Use figured dimensions only.
- Any discrepancies to be reported immediately to the engineer.
- This drawing to be read in conjunction with all relevant architects, engineers, subcontractors and specialists drawings and specifications.

1. Concrete grade C32/40.
2. Concrete cover to top, bottom and sides to be 40mm minimum unless stated otherwise.
3. All reinforcement to be grade B500A conforming to BS4449:2005
4. Bar bending schedule complies with BS 8666:2005.
5. Unless otherwise shown all laps to be minimum;

H8	320mm
H10	400mm
H12	480mm
H16	640mm
H20	800mm
H25	1000mm

6. Reinforcement layers denoted as:
- B1 - bottom reinforcement outer layer.
 - B2 - bottom reinforcement inner layer.
 - T1 - top reinforcement outer layer.
 - T2 - top reinforcement inner layer.
 - FF - far face
 - NF - near face
 - EF - each face



rev.	drawn	chkd.	apprvd.	date	description

Project
BOXING CLUB AT
PORT TALBOT CRICKET CLUB,
FENBROOK CLOSE, PORT TALBOT.



Vale Consultancy
CONSULTING CIVIL & STRUCTURAL ENGINEERS

date	drawn	checked	approved
09.12.22	MR	SR 09.12.22	MJ 09.12.22

status	drg. no.	rev.
	10986-RC001	