

SIDE ELEVATION "C"




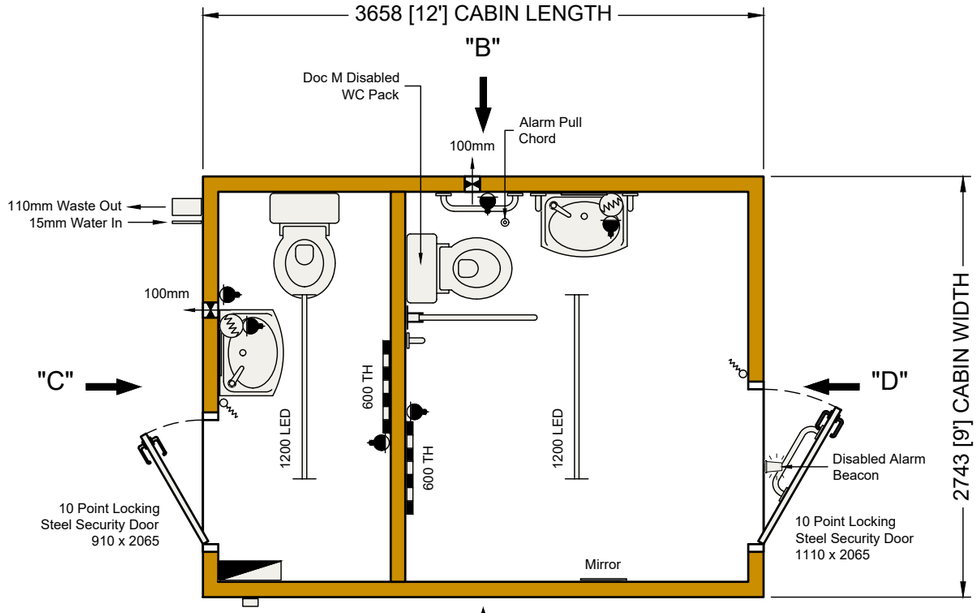


SIDE ELEVATION "D"

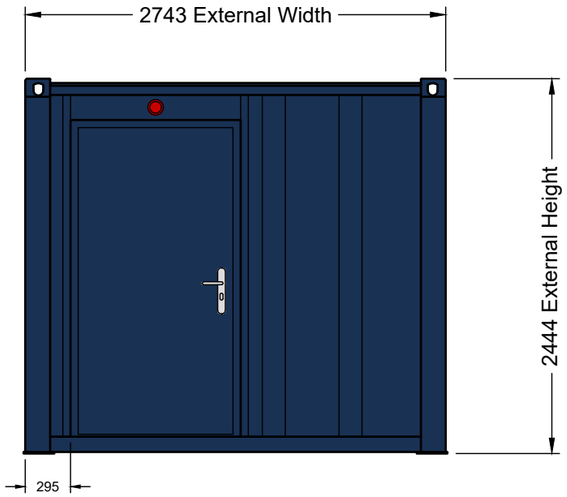

SIDE ELEVATION "A"

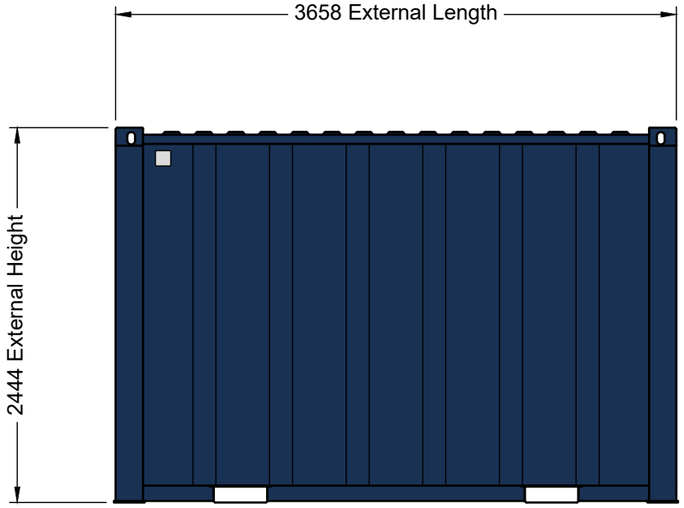

SIDE ELEVATION "B"

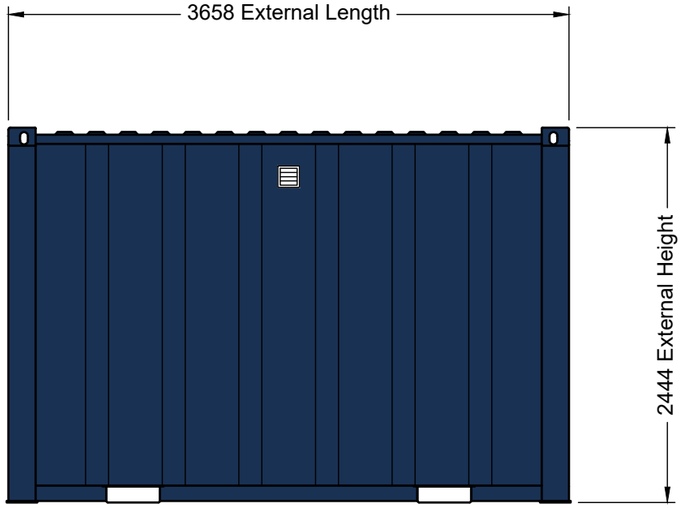

Wall & Floor Specification

Internal Walls:
Plasterboard Internal Face, Fastened to 44 x 34 Wall Studs, Insulated with Fibreglass/Mineral Wool

External Wall Construction:
1.6mm Profiled Steel Wall Panels Painted with One Coat Colour TBC.

Floor Finish:
18mm OSB3 board and 2mm Non-Slip Vinyl - Colour Ash Grey.

Sheet 1 of 1

portablespace®
cabin & container hire | sales | conversions | modular

Address: Portable Space Ltd.
Modular House, Bacton Business Park,
Bacton, Suffolk, IP14 4LE
TEL. 01449 782 123

Copyright in this drawing belongs to Portable Space Ltd. Neither the whole drawing nor any part thereof may be reproduced without the prior written permission of Portable Space Ltd.

- Distribution Board
- Panel Heater
- Tubular Heater
- High Level Fan Heater
- 13A Double Socket in Trunking
- 13A Double Socket HL
- 13 A Double Socket LL
- Fused Spur
- RJ45 Data Socket
- Wall Light Switch
- Pull Light Switch
- Tubular Light Fitting
- Bulkhead Light
- - EB Emergency Backup (Light Fitting)
- Motion Sensor
- Motion Sensor Override Switch
- EXIT Emergency Exit Light
- Water Heater - Under/Over Sink
- Shower Heater
- Extraction Fan
- Thermostat
- Frost Stat
- Integrated Container Vent
- ES 12mm Earthing Stud

Additional Details:
**

Client
Q014698-2 - Neath Community Tennis Courts Ltd
12' x 9' Toilet (1+Disabled) Steel AV Cabin

Drawn by: PMW

Date: 08-05-2024

Scale: 1:40@A3

Rev: 0

Container Type: 12' x 9' Steel Anti-Vandal Cabin