Proposed Front Elevation

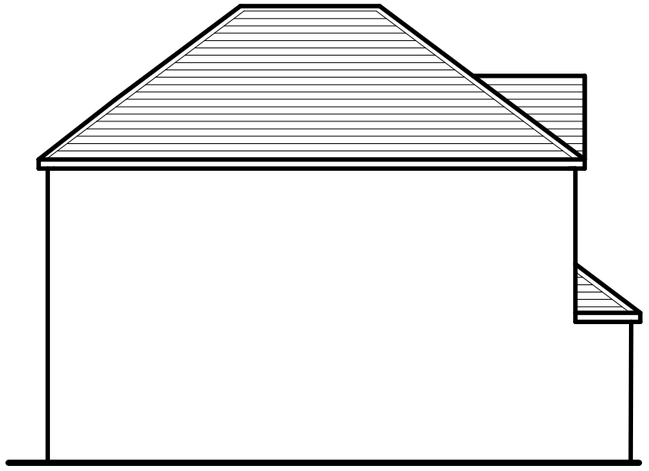

Proposed Elevation RHS

Proposed Rear Elevation

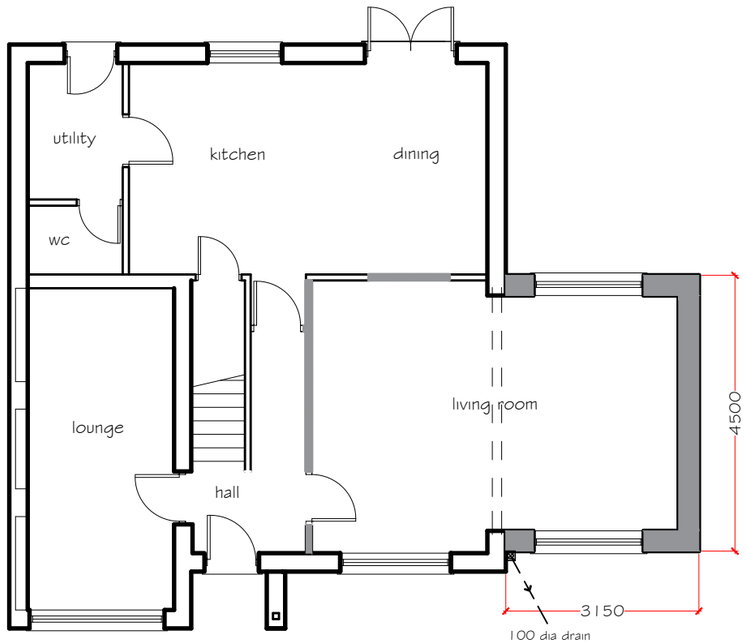

Proposed Ground Floor Plan

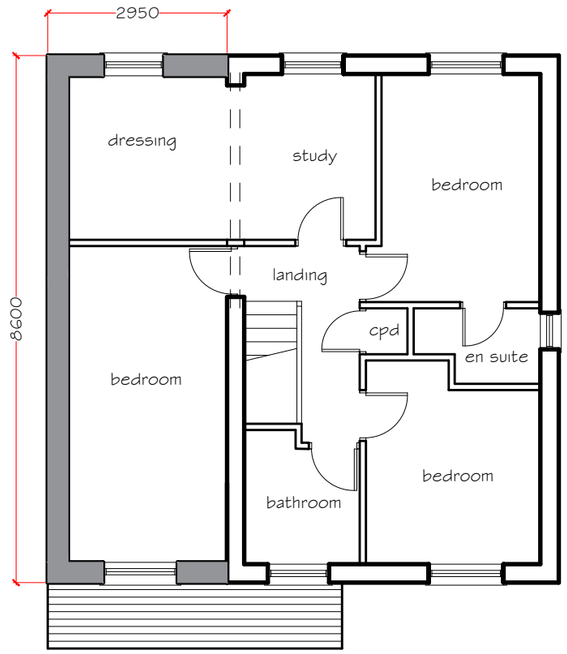

Proposed First Floor Plan

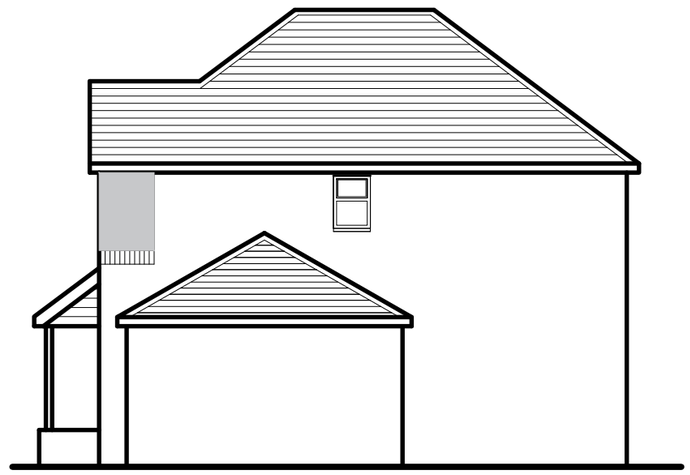

Proposed Elevation LHS

Proposed Materials & Finishes - TO MATCH

Walls - facing brick with rendered panels
Windows & doors
double glazed white PVCu units.

Main roof plain concrete tiles
flat roof rubber finish with a lantern roof window

white PVCu fascia, soffit and barge boards.
white PVCu rainwater goods

GENERAL NOTES

THE DESIGN AND CONSTRUCTION OF THE BUILDING WORKS AND ALL SERVICES WILL BE CARRIED OUT TO SATISFY THE REQUIREMENTS SET OUT IN LATEST STATUTORY BUILDING REGULATIONS AND TO THE APPROVAL OF THE APPOINTED BUILDING INSPECTOR

PETER JONES
TALBOT DESIGN SERVICES
mobile: 07817538014
email: jonespeter177@gmail.com

project title
proposed rear extension
125 Cae Glas, Cwmafan
Port Talbot

drawing title
proposed elevatons
and floor plan

date
October 2022

scale
1:100

drawing No
125 CG - 02

Superseded